

## Lecture #19

# Database Logging



# ADMINISTRIVIA

---

**Project #3** is due **Nov 19<sup>th</sup>** @ **11:59pm**

→Special OH this Saturday Nov 18th, 3pm-5pm, in GHC 4303

**Project #4** on Concurrency Control is out **today** due  
**Dec 10<sup>th</sup>** @ **11:59pm**

# UPCOMING DATABASE TALKS



November 13, 2023: ALIBABA

DOMAIN KNOWLEDGE AUGMENTED AI FOR DATABASES (JIAN TAN)



November 20, 2023 : PGVECTOR

STYLISH HIERARCHICAL NAVIGABLE SMALL WORLD INDEXES! (JONATHAN KATZ)




November 27, 2023: CHROMA


VECTOR DATABASE STRAIGHT FROM THE TENDERLOIN! (JEFF HUBER)

<https://cmu.zoom.us/j/91461275681> (Passcode 177332)


# MOTIVATION

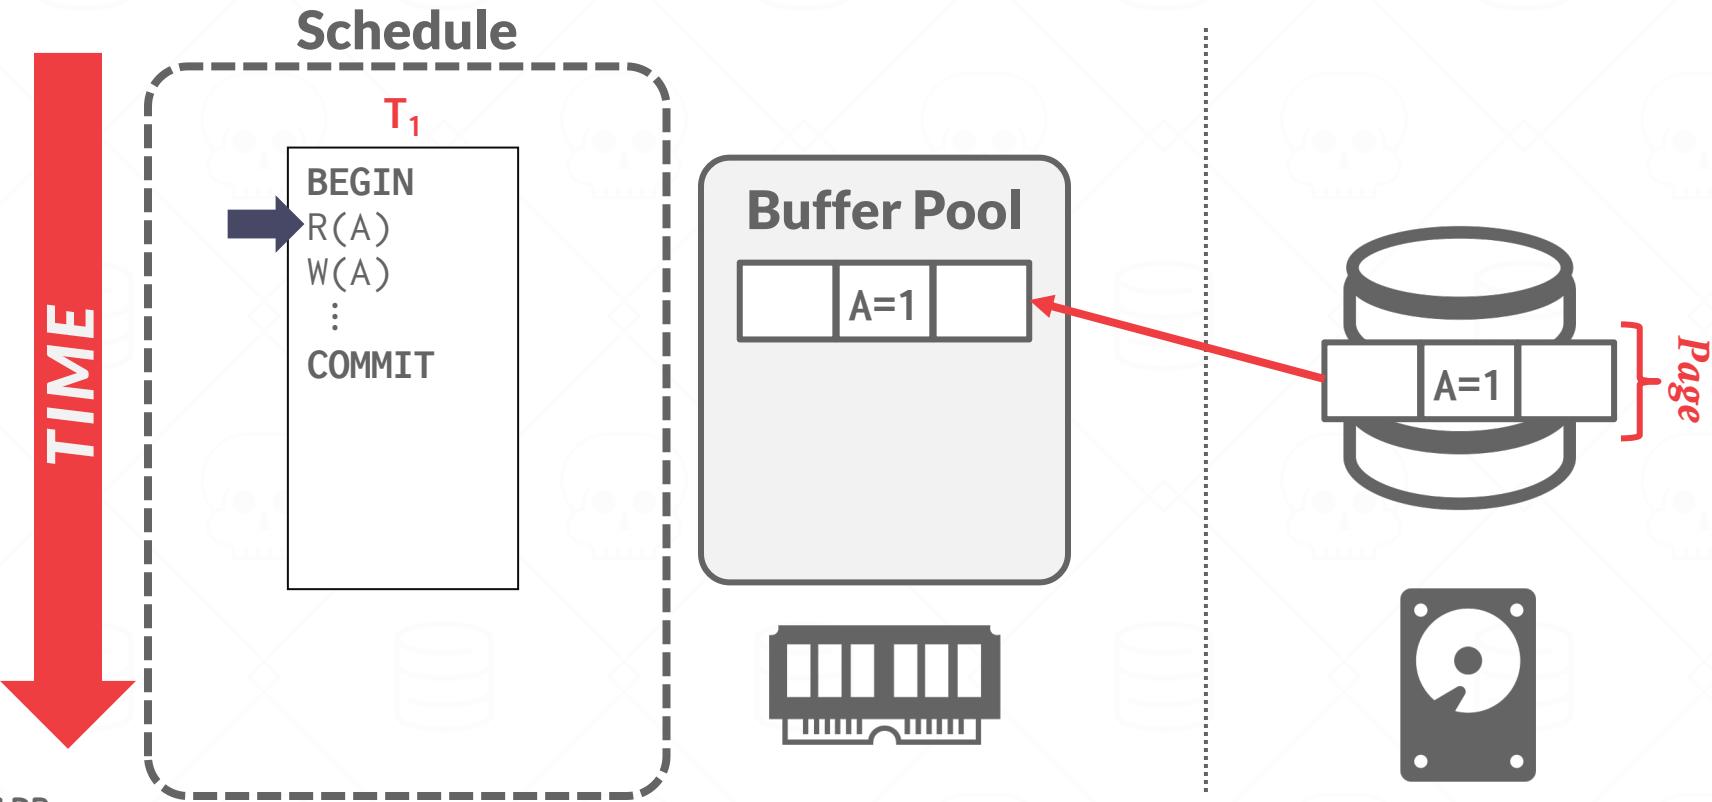


# MOTIVATION

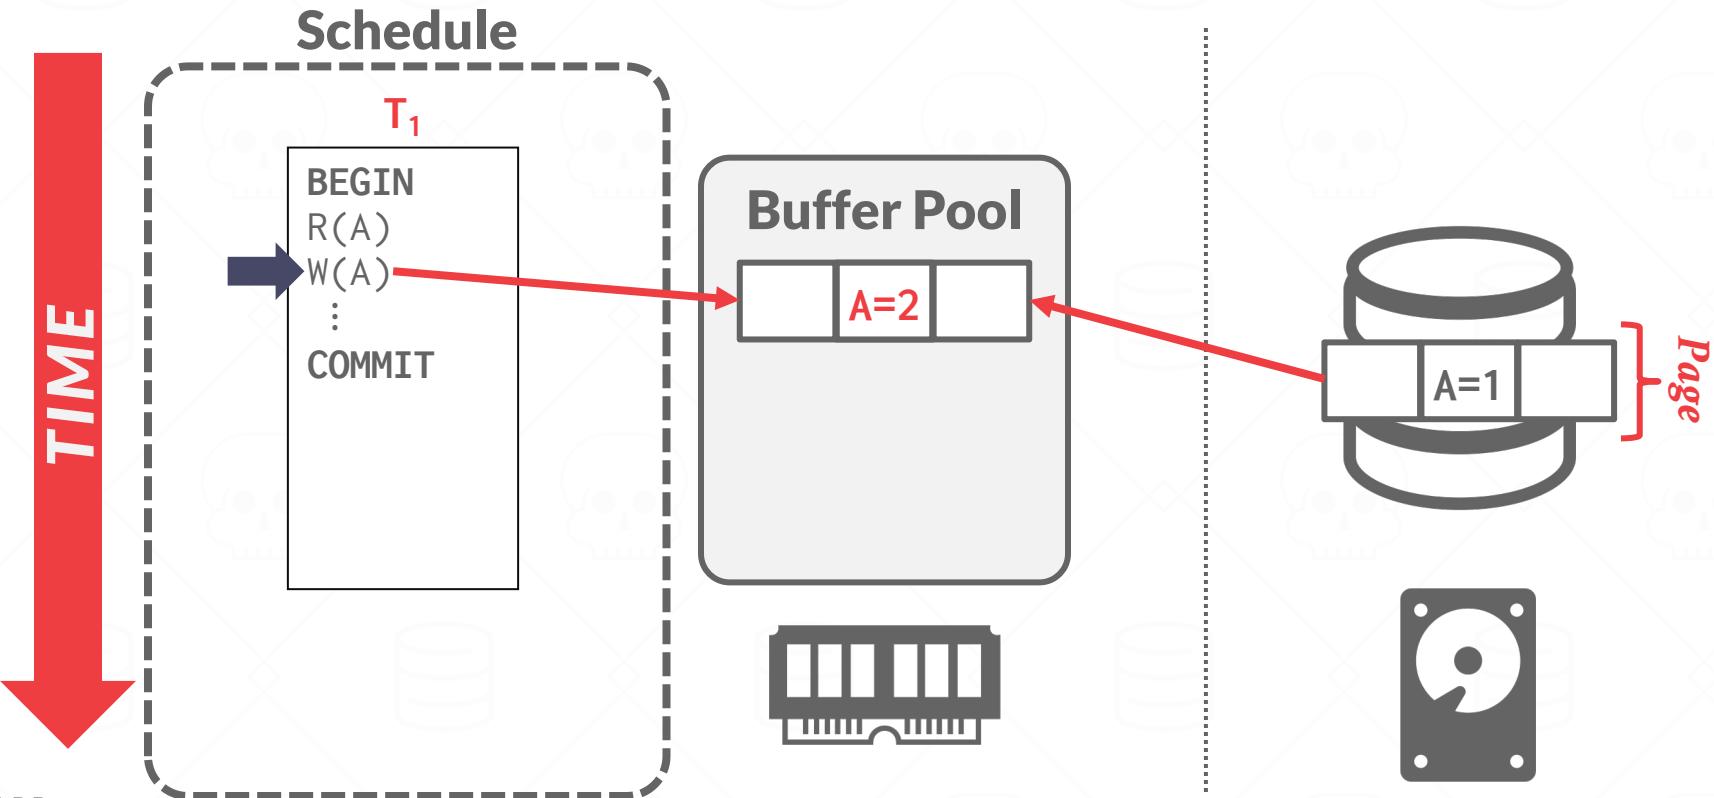

# MOTIVATION

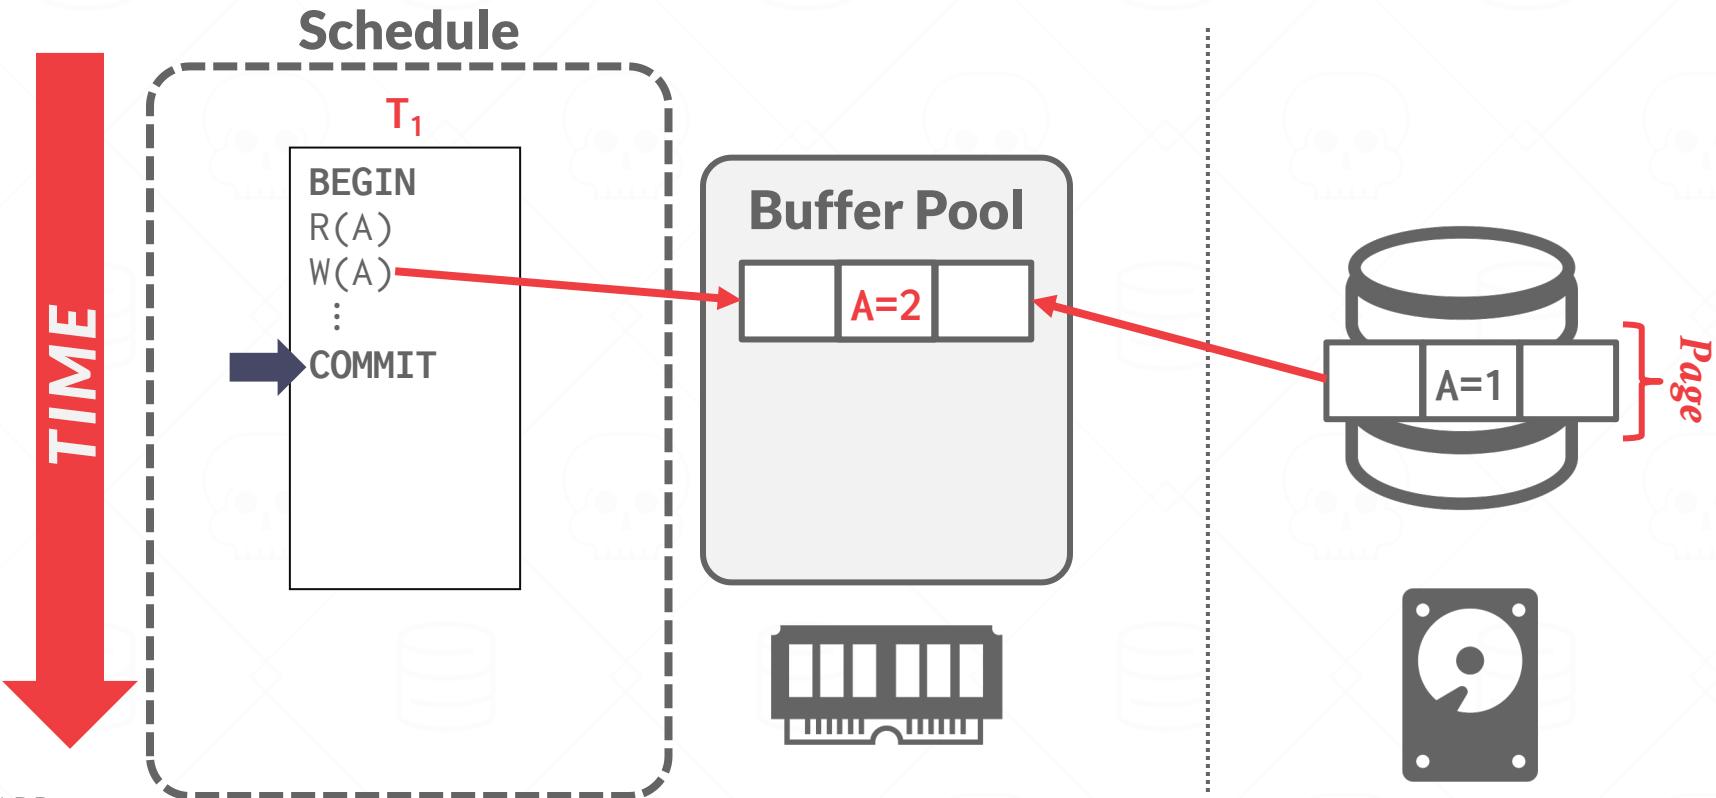

# MOTIVATION

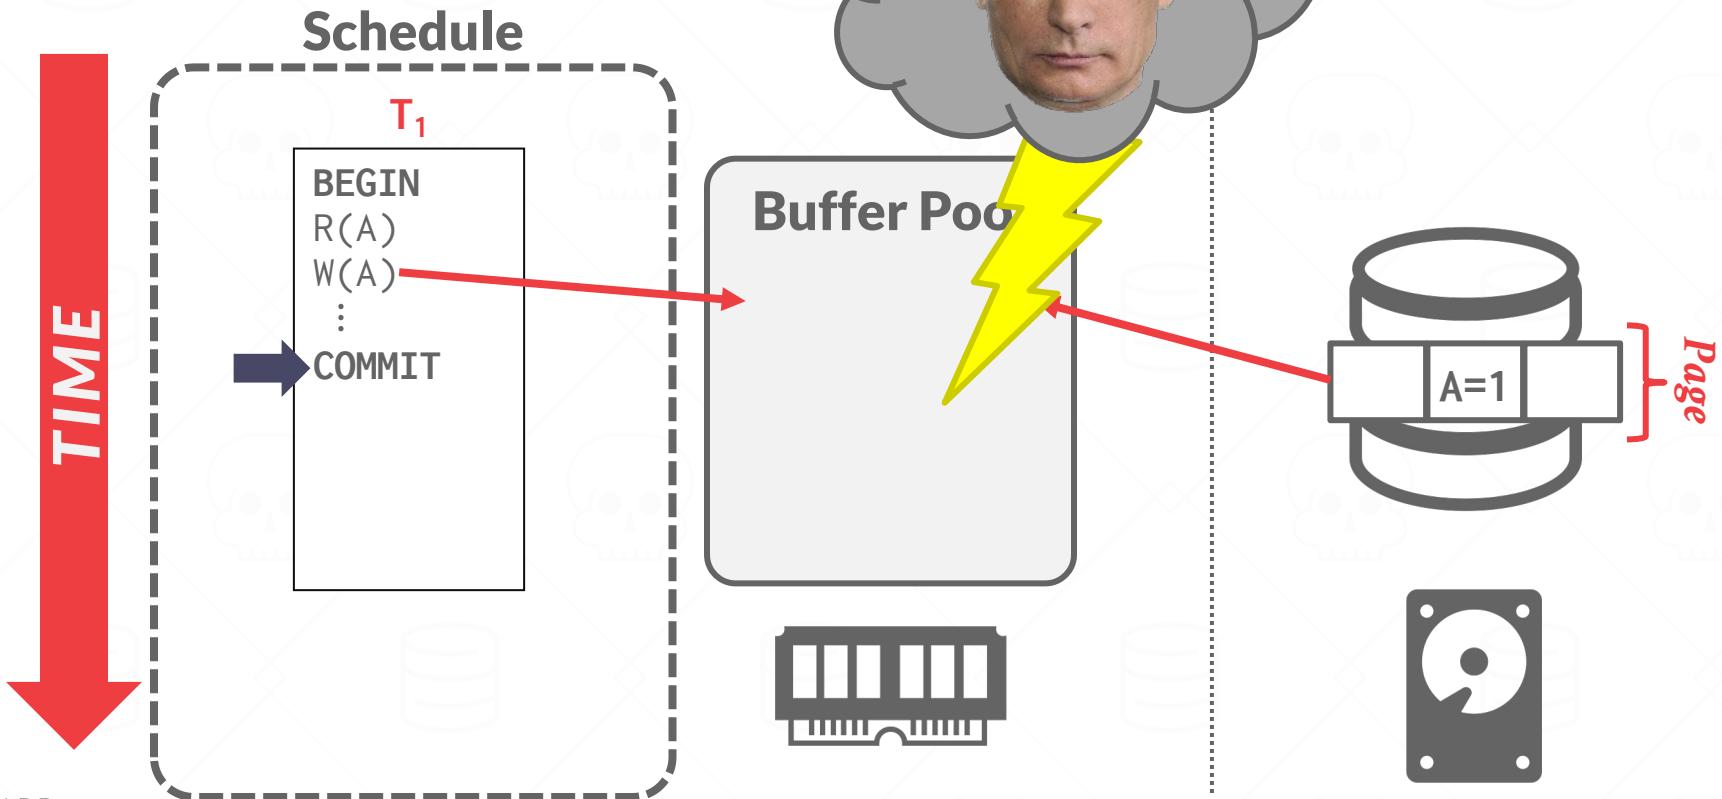

# CRASH RECOVERY

Recovery algorithms are techniques to ensure database consistency, transaction atomicity, and durability despite failures.

Recovery algorithms have two parts:

→ Actions during normal txn processing to ensure that the DBMS can recover from a failure.

*Today*

→ Actions after a failure to recover the database to a state that ensures atomicity, consistency, and durability.

# TODAY'S AGENDA

---

Failure Classification

Buffer Pool Policies

Shadow Paging

Write-Ahead Log

Logging Schemes

Checkpoints

# STORAGE TYPES

---

## Volatile Storage:

- Data does not persist after power loss or program exit.
- Examples: DRAM, SRAM

## Non-volatile Storage:

- Data persists after power loss and program exit.
- Examples: HDD, SSD

## Stable Storage:


- A non-existent form of non-volatile storage that survives all possible failures scenarios.

# CRASH RECOVERY: INTUITION

Volatile storage where the buffer pool sits, and non-volatile storage below it.

We want high performance, hence want to write to volatile storage.

Allow dirty pages in the buffer pool for performance, with buffer pool replacement policy dictating flush to non-volatile storage.

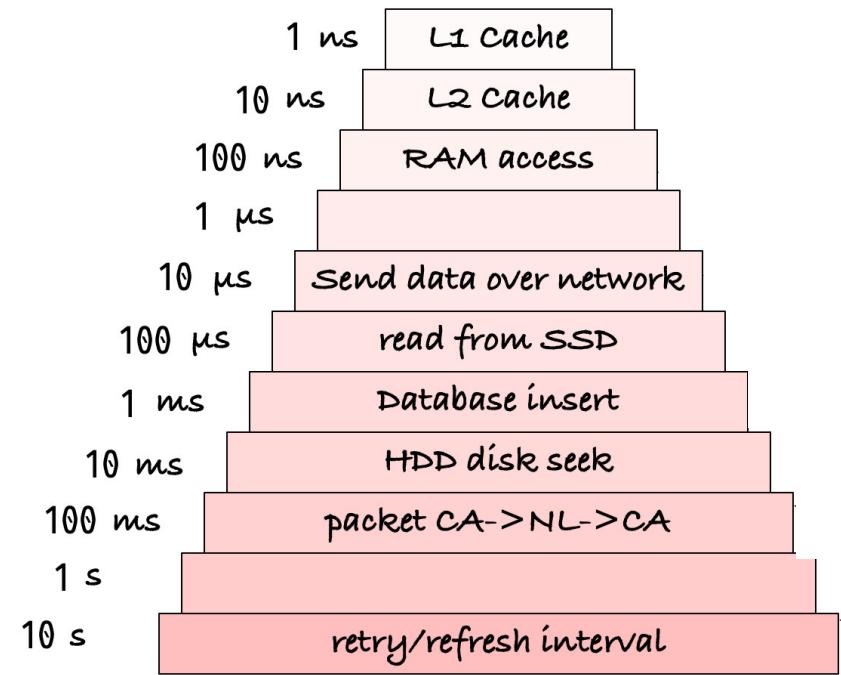

# FAILURE CLASSIFICATION

---

Type #1 – Transaction Failures

Type #2 – System Failures

Type #3 – Storage Media Failures

# TRANSACTION FAILURES

---

## Logical Errors:

- Transaction cannot complete due to some internal error condition (e.g., integrity constraint violation).

## Internal State Errors:

- DBMS must terminate an active transaction due to an error condition (e.g., deadlock).

# SYSTEM FAILURES

---

## Software Failure:

- Problem with the OS or DBMS implementation (e.g., uncaught divide-by-zero exception).

## Hardware Failure:

- The computer hosting the DBMS crashes (e.g., power plug gets pulled).
- Fail-stop Assumption: Non-volatile storage contents are assumed to not be corrupted by system crash.

# STORAGE MEDIA FAILURE

---

## Non-Repairable Hardware Failure:

- A head crash or similar disk failure destroys all or part of non-volatile storage.
- Destruction is assumed to be detectable (e.g., disk controller use checksums to detect failures).

The recovery protocol can't recover from this!

Database must be restored from an archived version.

# OBSERVATION

---

The database's primary storage location is on non-volatile storage, but this is slower than volatile storage. Use volatile memory for faster access:

- First copy target record into memory.
- Perform the writes in memory.
- Write dirty records back to disk.

The DBMS needs to ensure the following:

- The changes for any txn are durable once the DBMS has told somebody that it committed.
- No partial changes are durable if the txn aborted.

# UNDO VS. REDO


---

**Undo:** The process of removing the effects of an incomplete or aborted txn.


**Redo:** The process of re-applying the effects of a committed txn for durability.

How the DBMS supports this functionality depends on how it manages the buffer pool ...


# BUFFER POOL

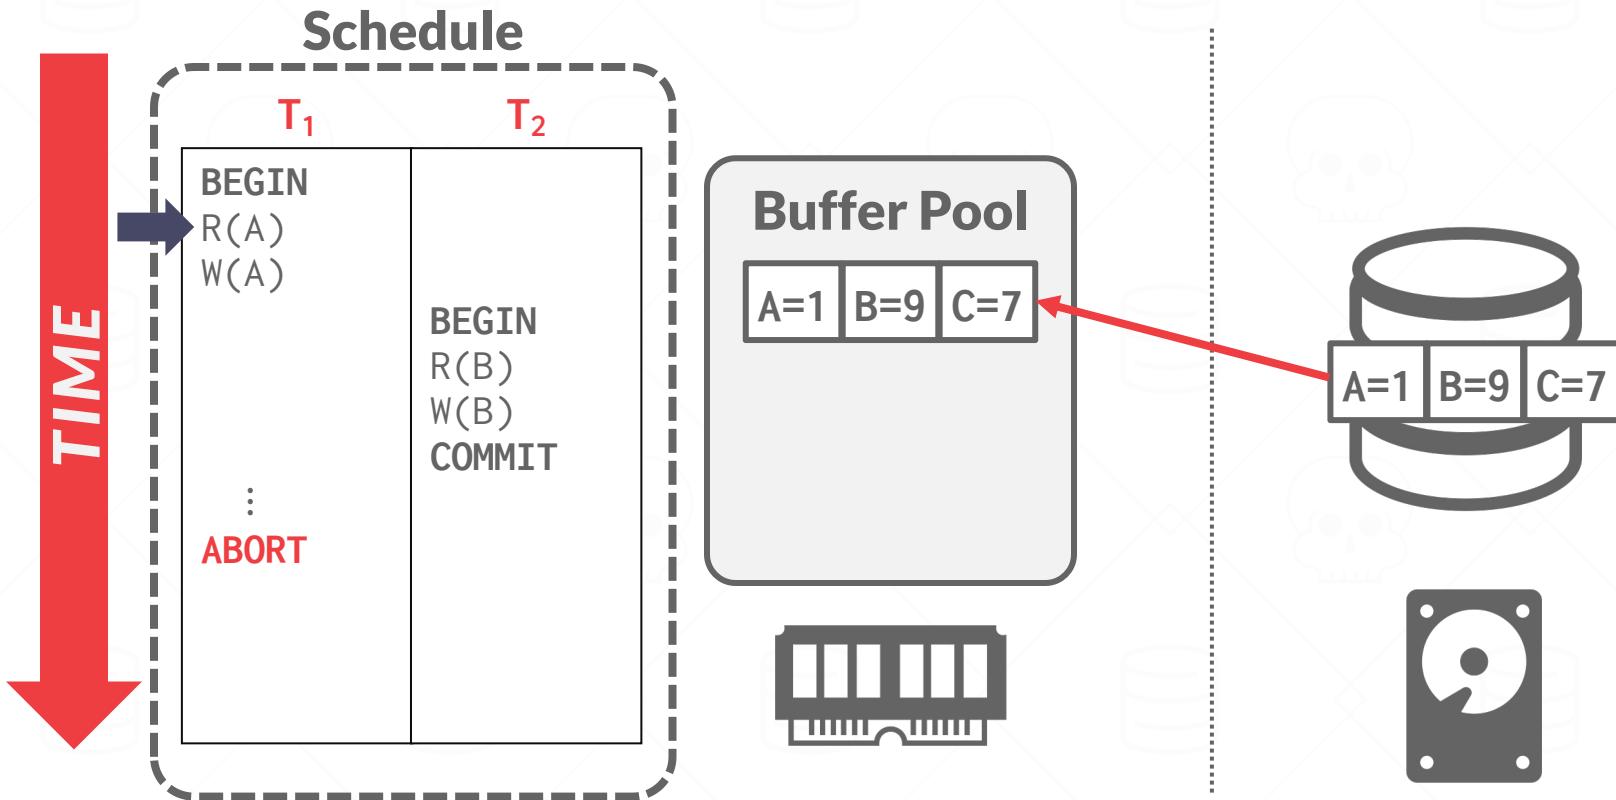


# BUFFER POOL

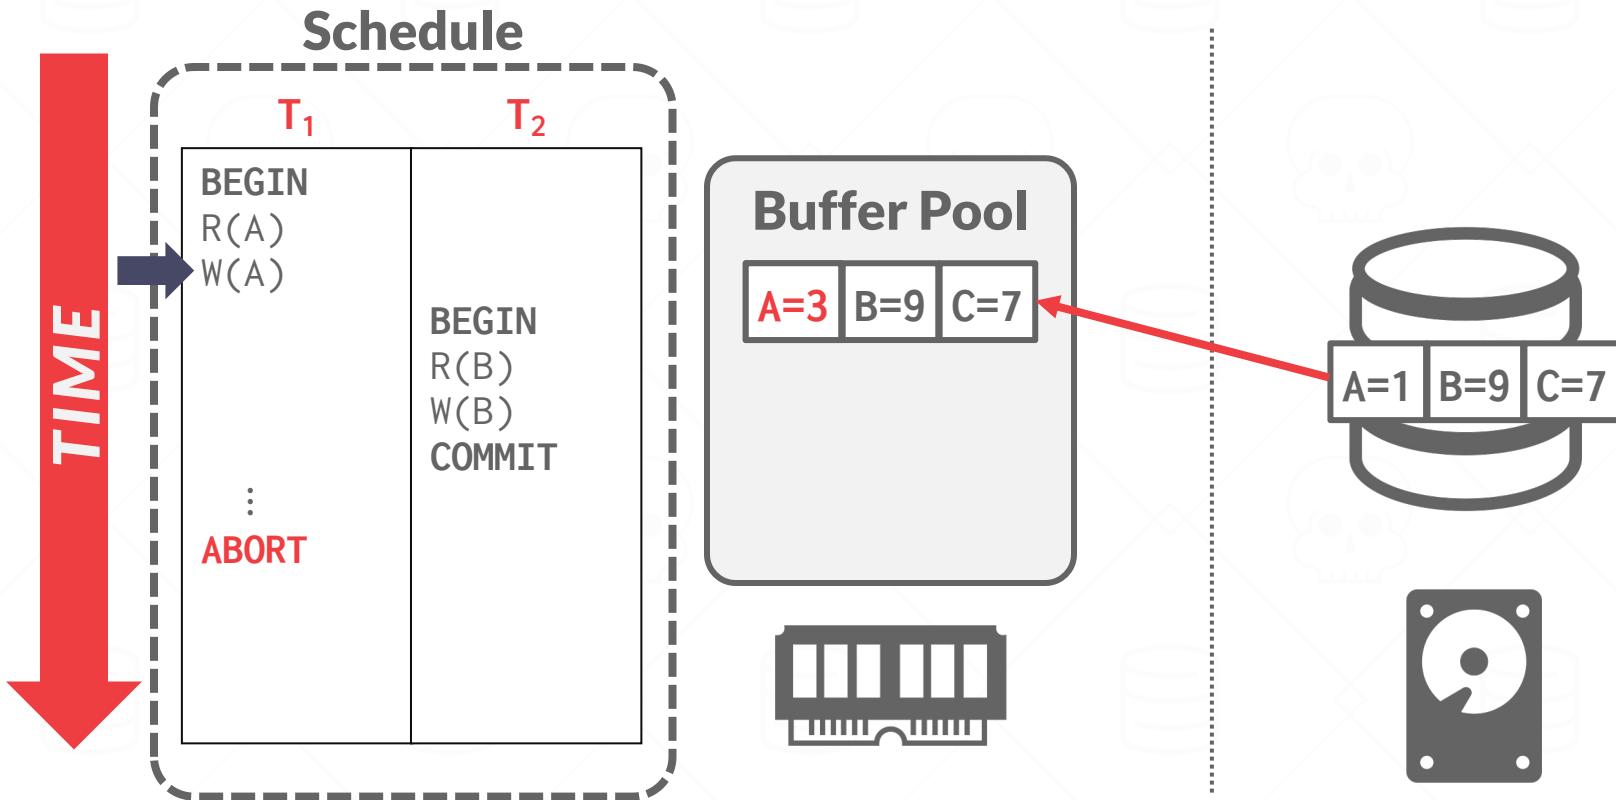


# BUFFER POOL

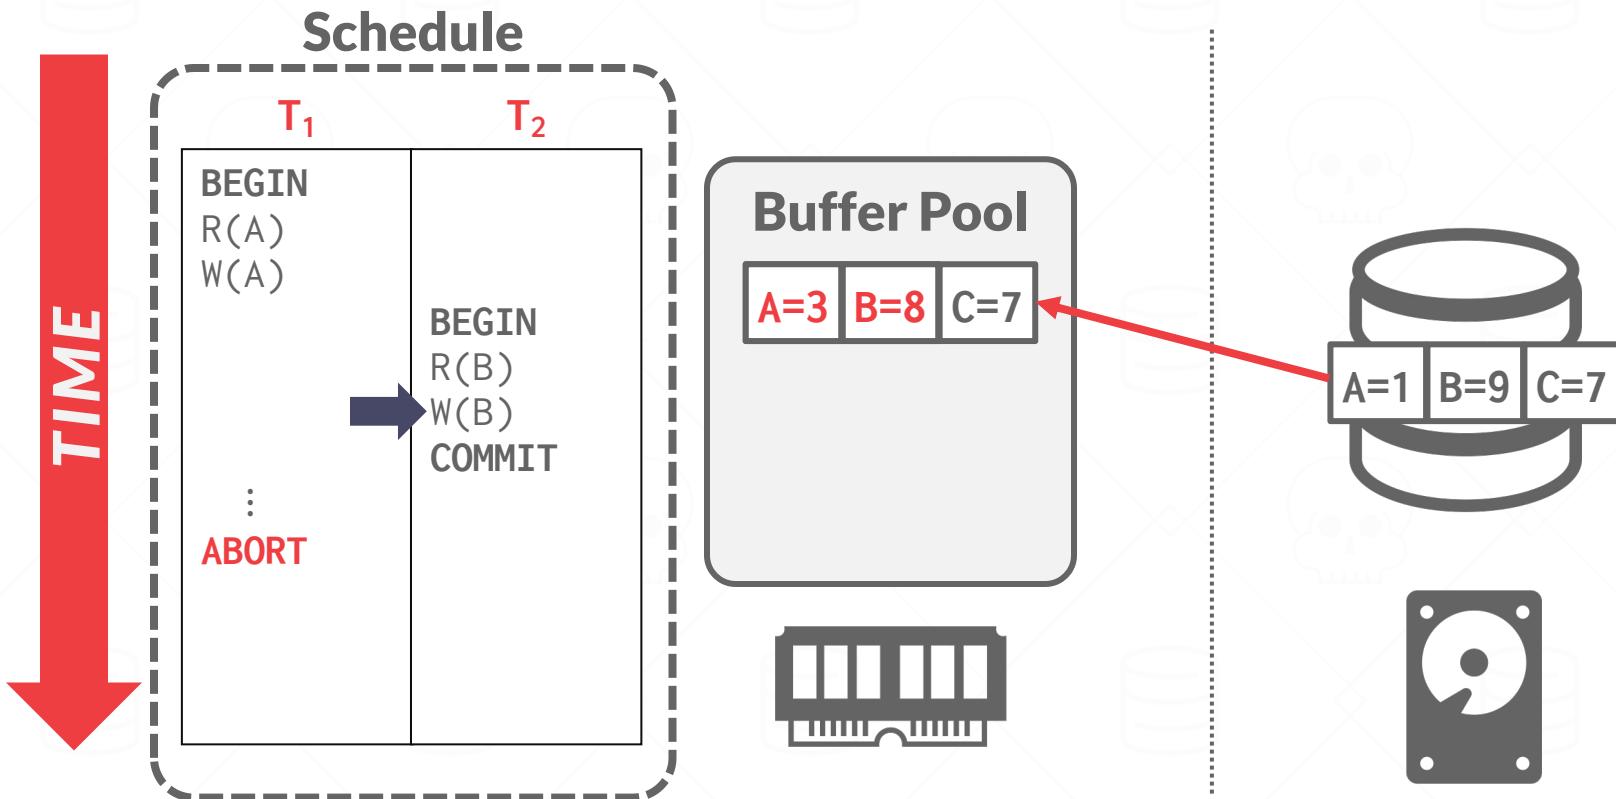


# BUFFER POOL

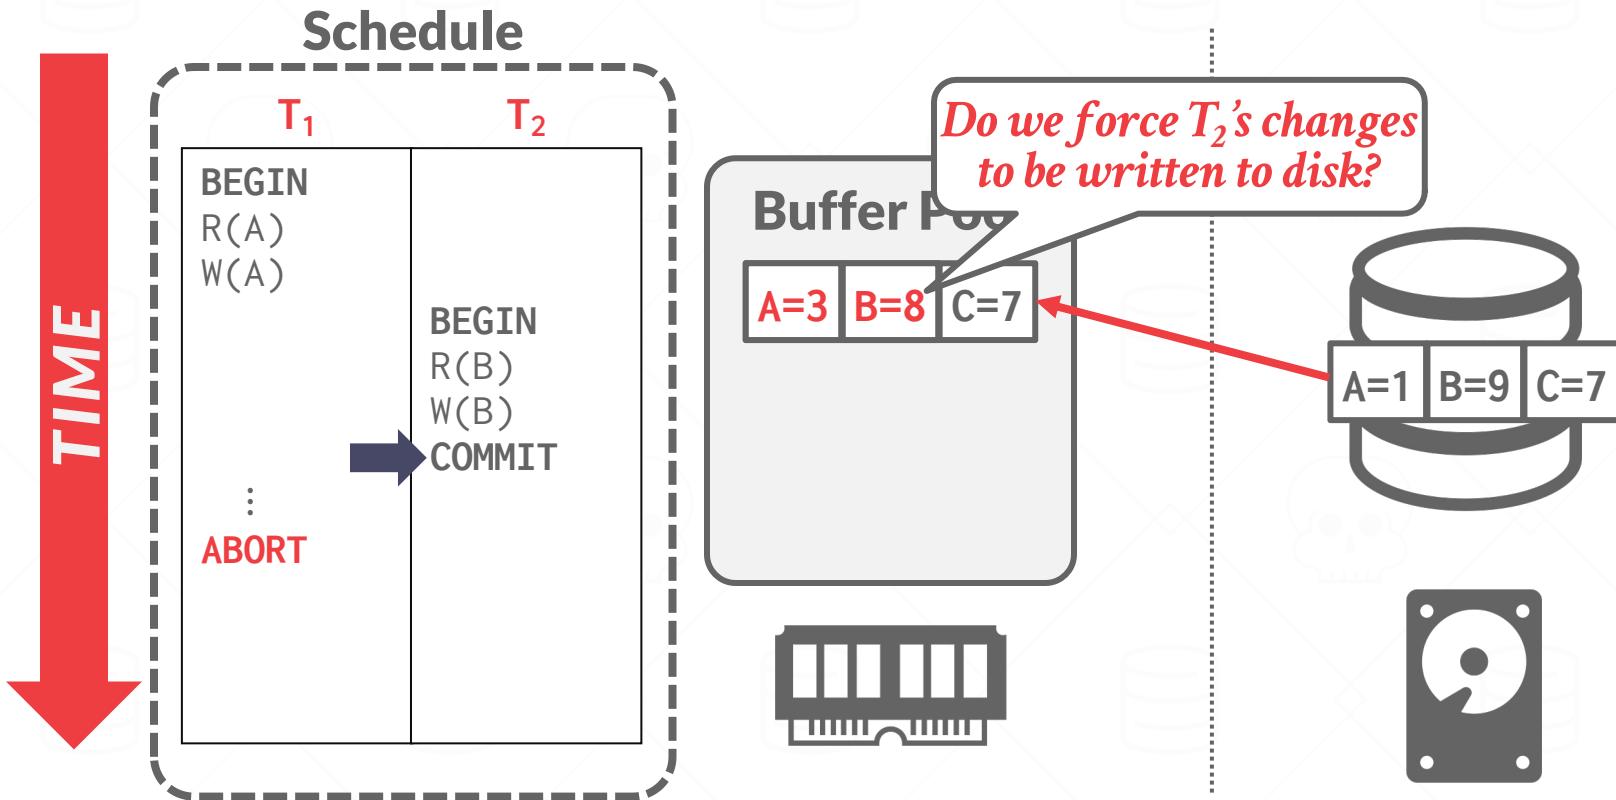


# BUFFER POOL

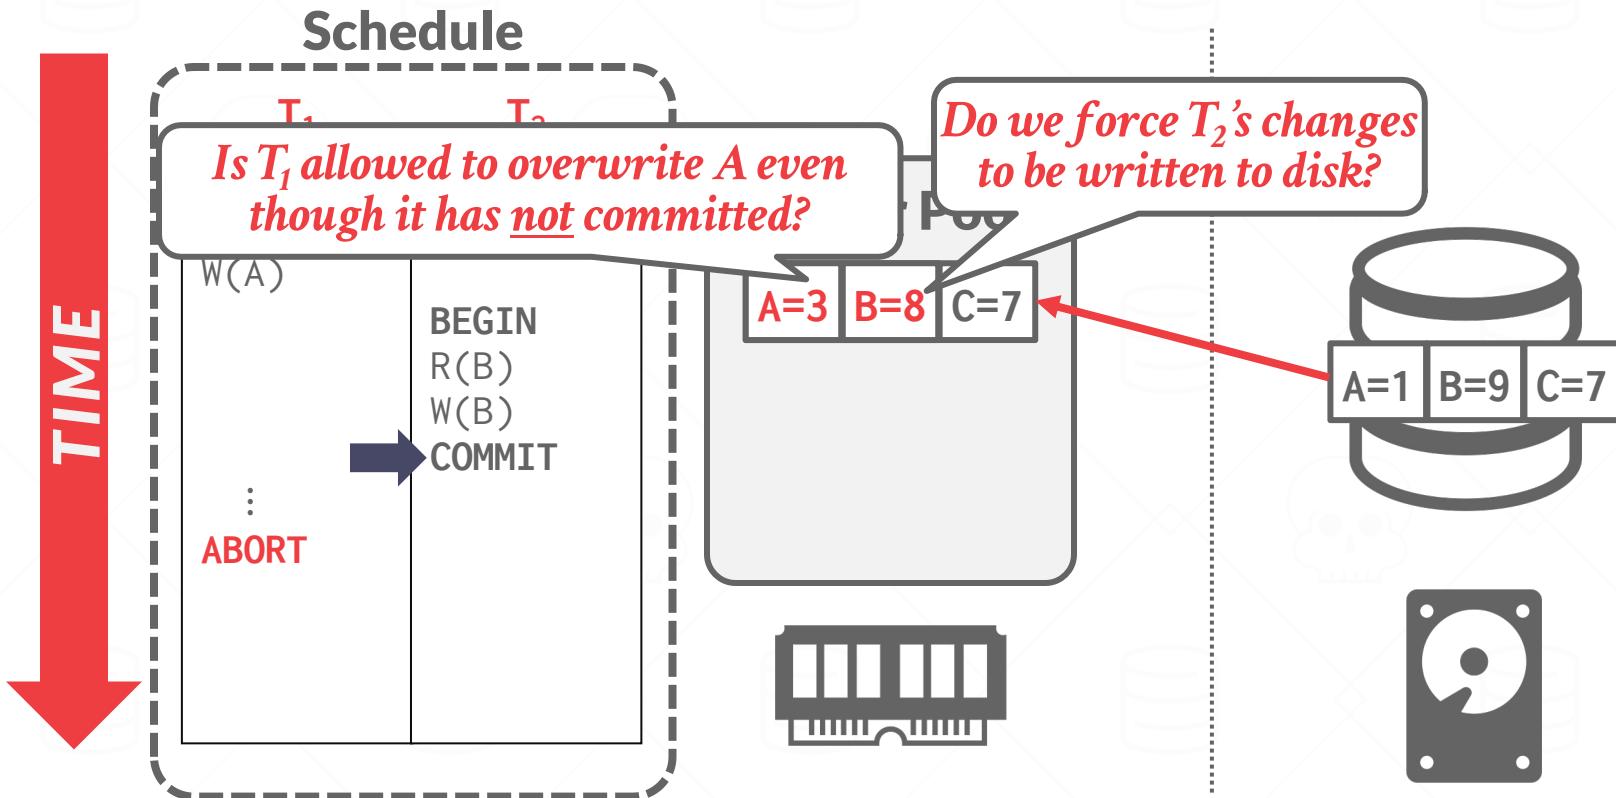

# BUFFER POOL

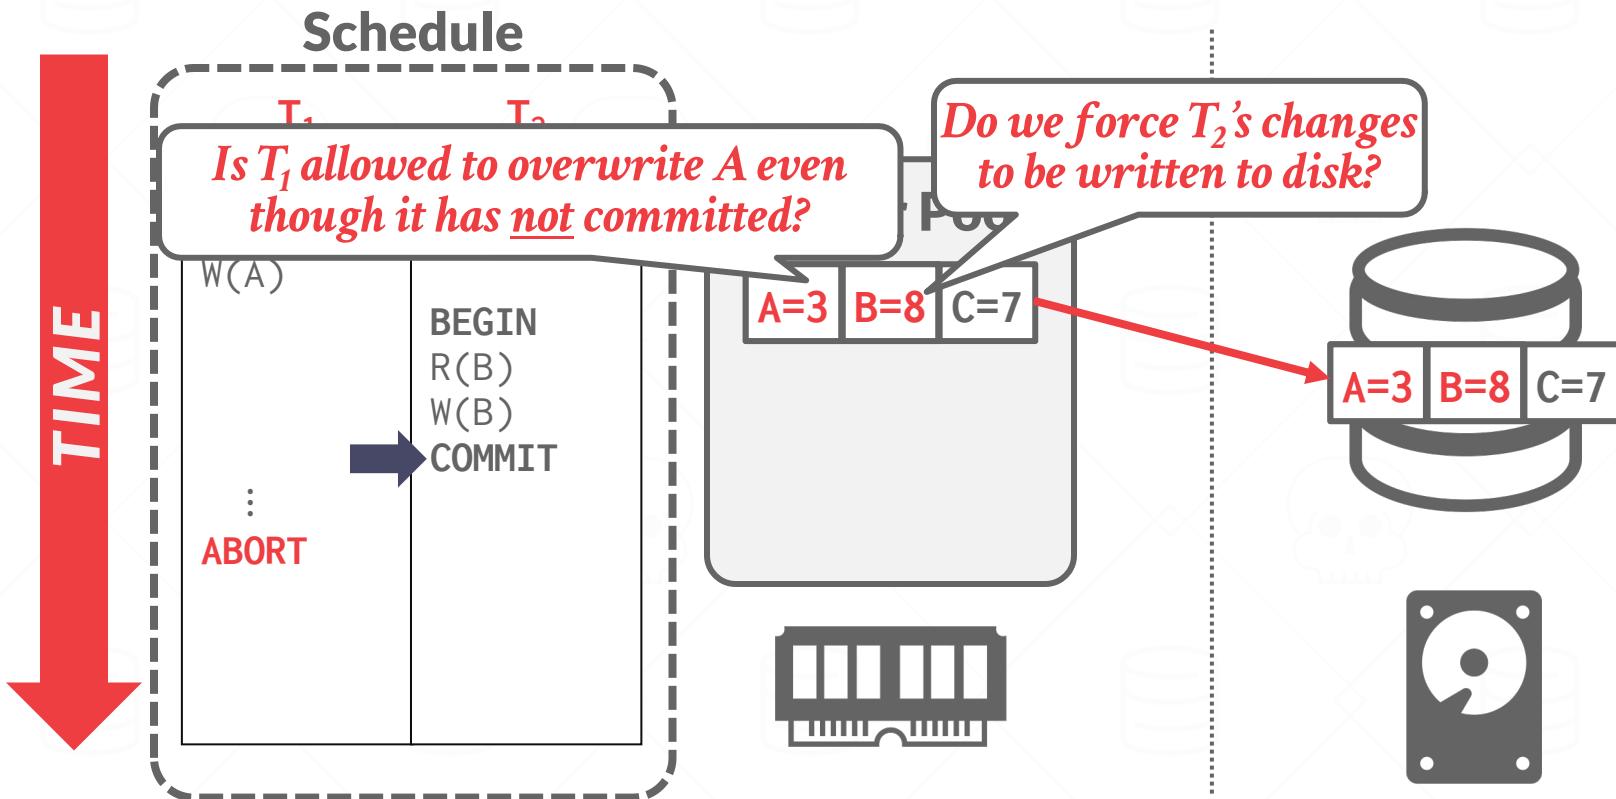

# BUFFER POOL

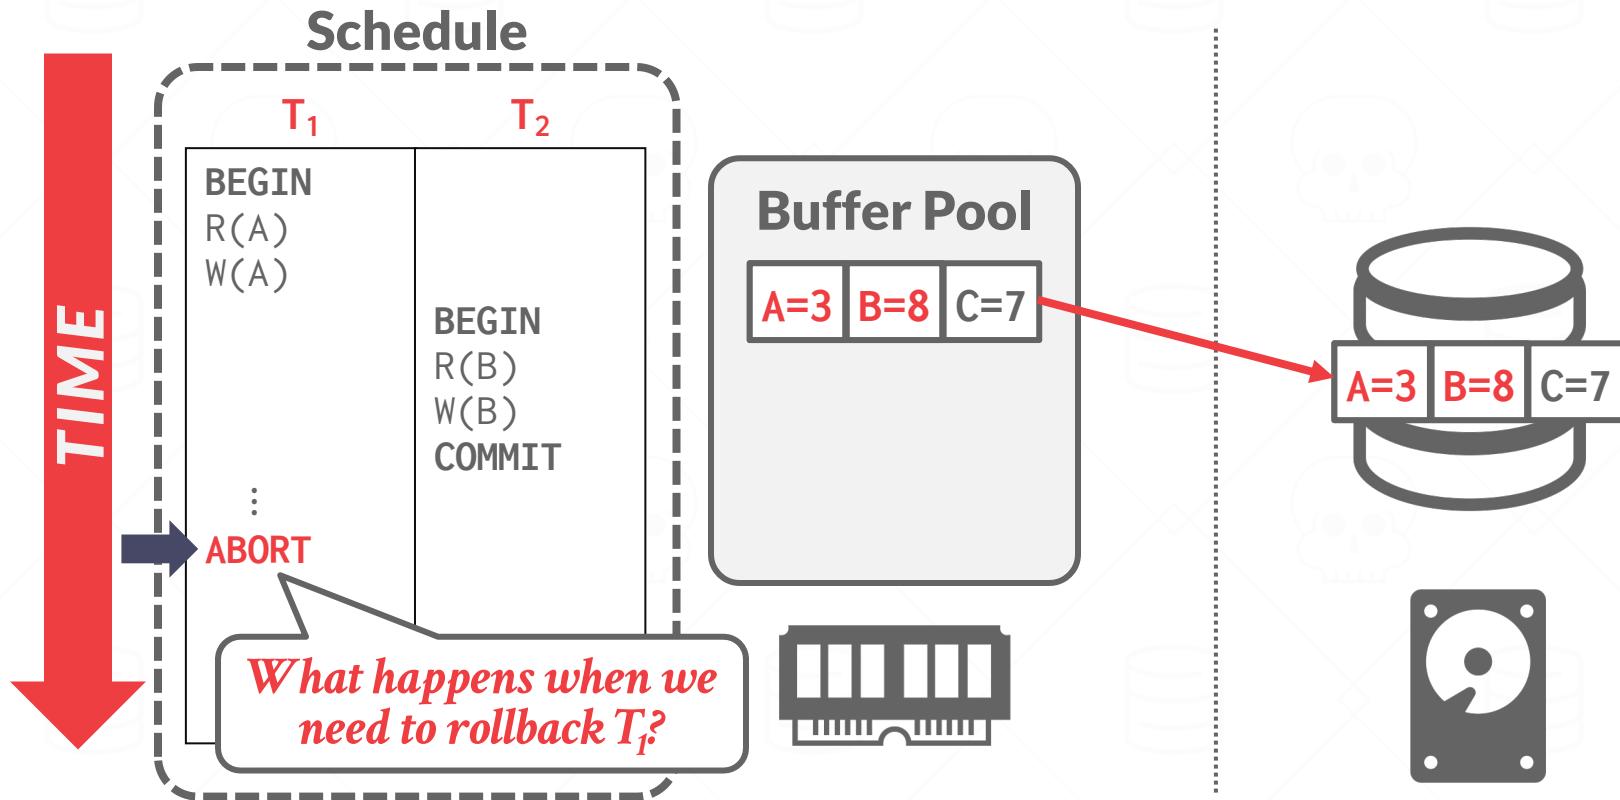

# STEAL POLICY

---

Whether the DBMS allows an uncommitted txn to overwrite the most recent committed value of an object in non-volatile storage.

**STEAL:** Is allowed.

**NO-STEAL:** Is not allowed.

# FORCE POLICY


---

Whether the DBMS requires that all updates made by a txn are reflected on non-volatile storage before the txn can commit.


**FORCE**: Is required.

**NO-FORCE**: Is not required.


# NO-STEAL + FORCE

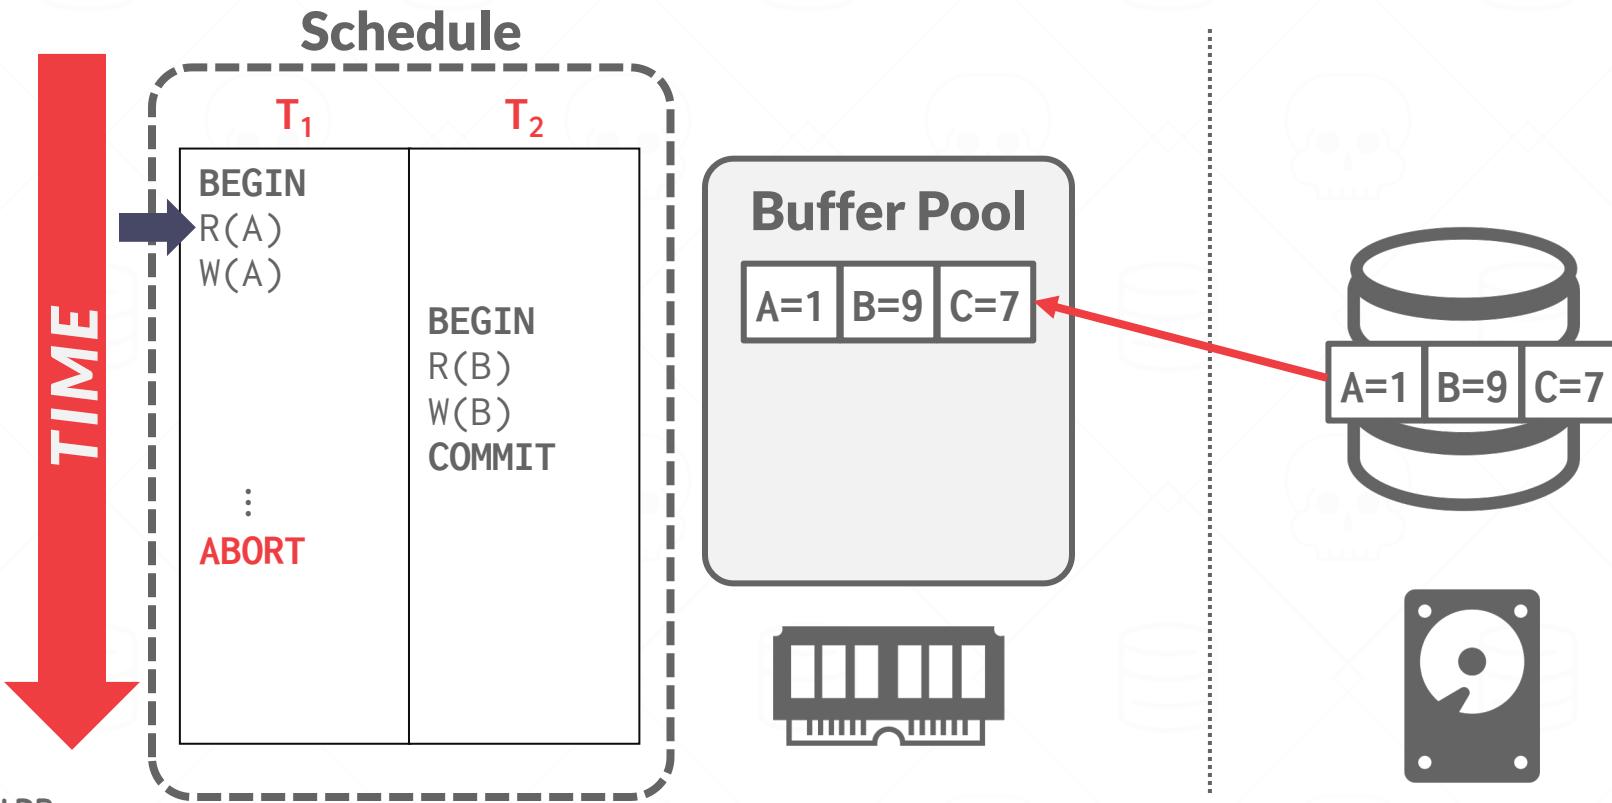


# NO-STEAL + FORCE

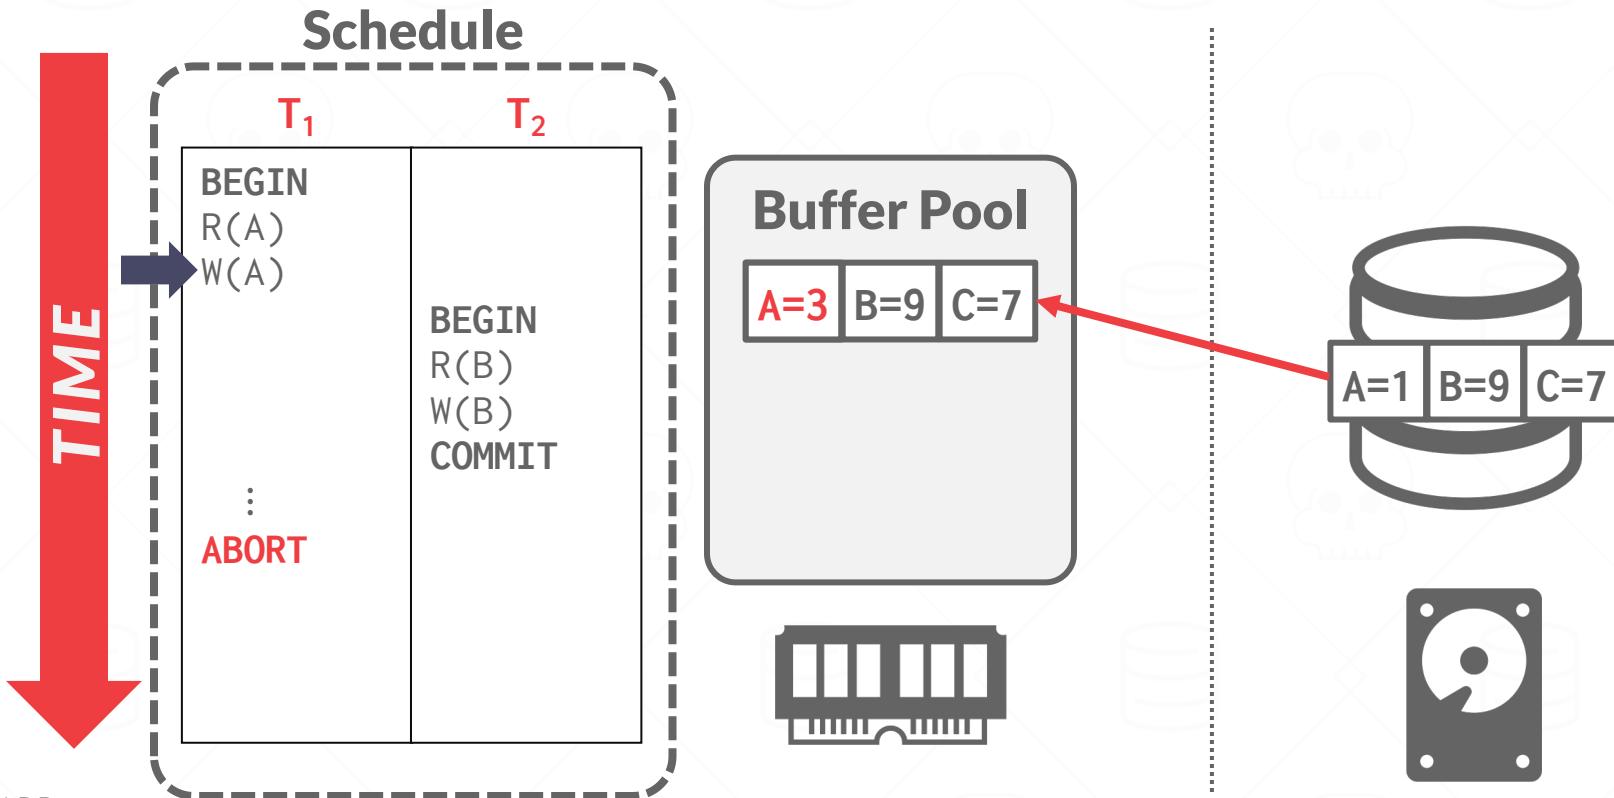


# NO-STEAL + FORCE

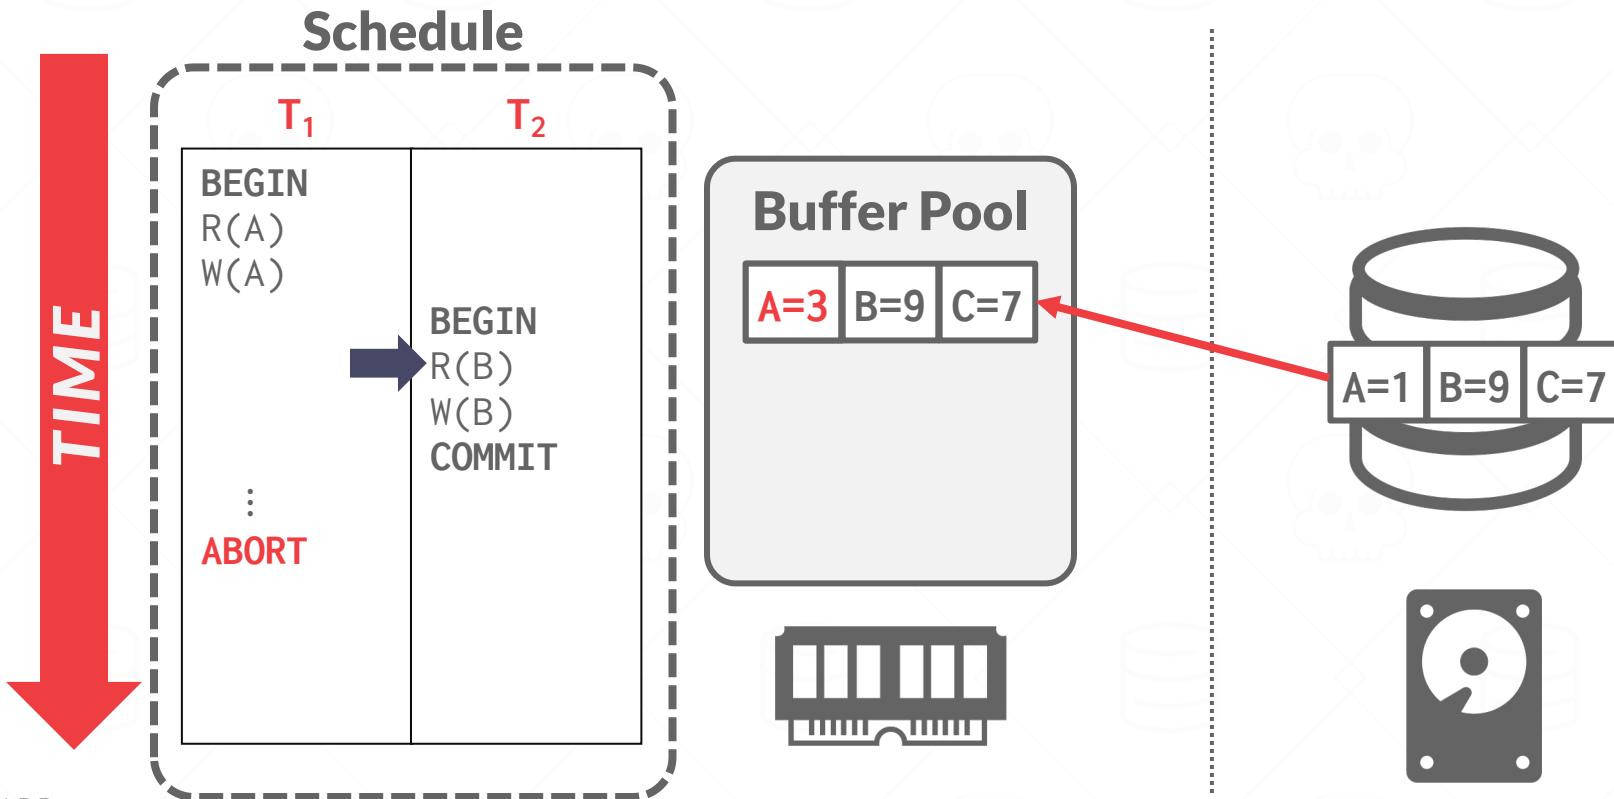


# NO-STEAL + FORCE

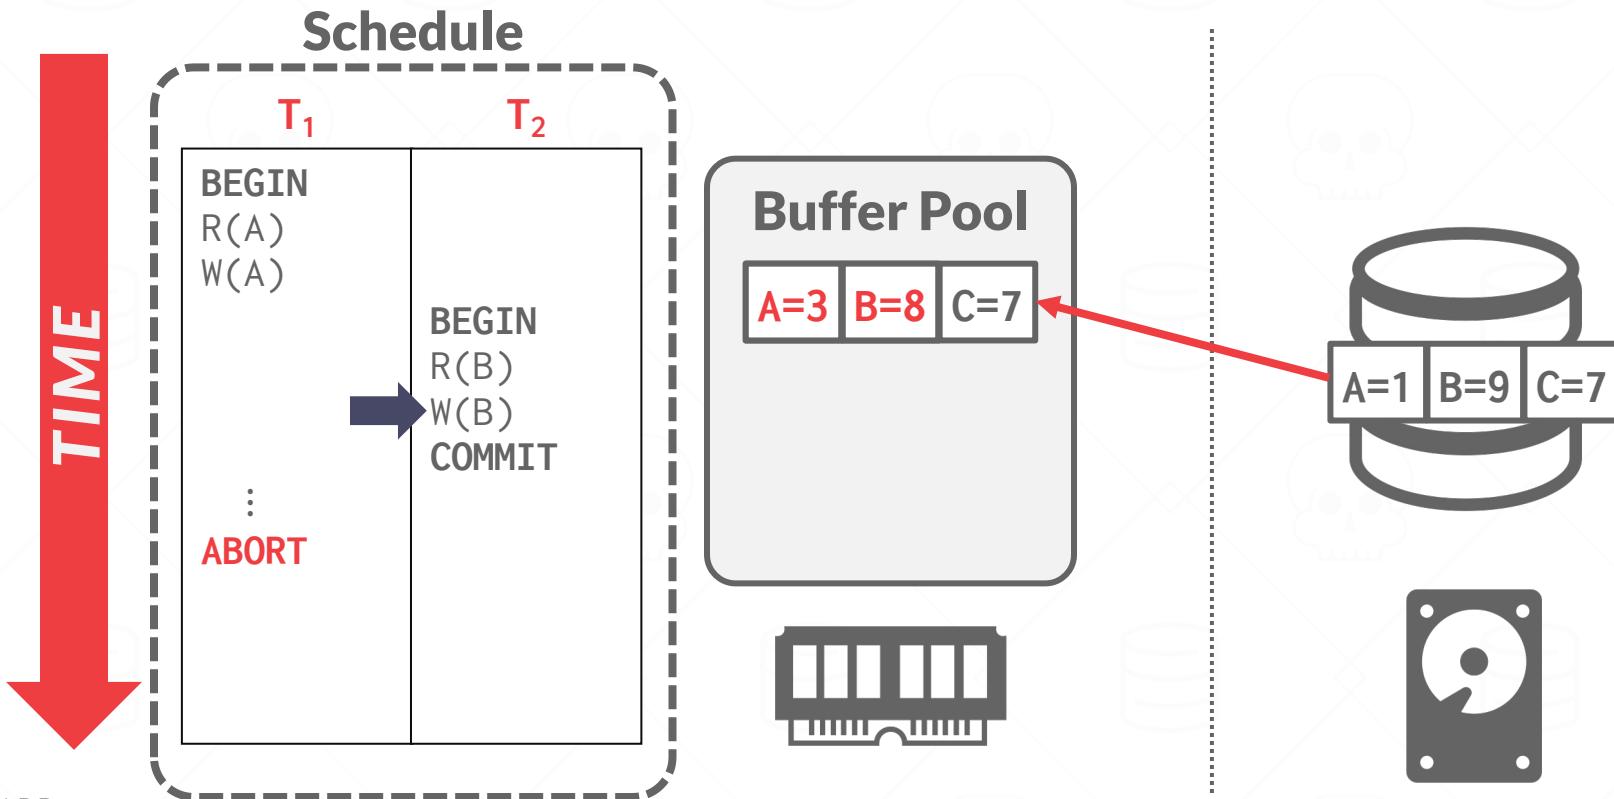


# NO-STEAL + FORCE

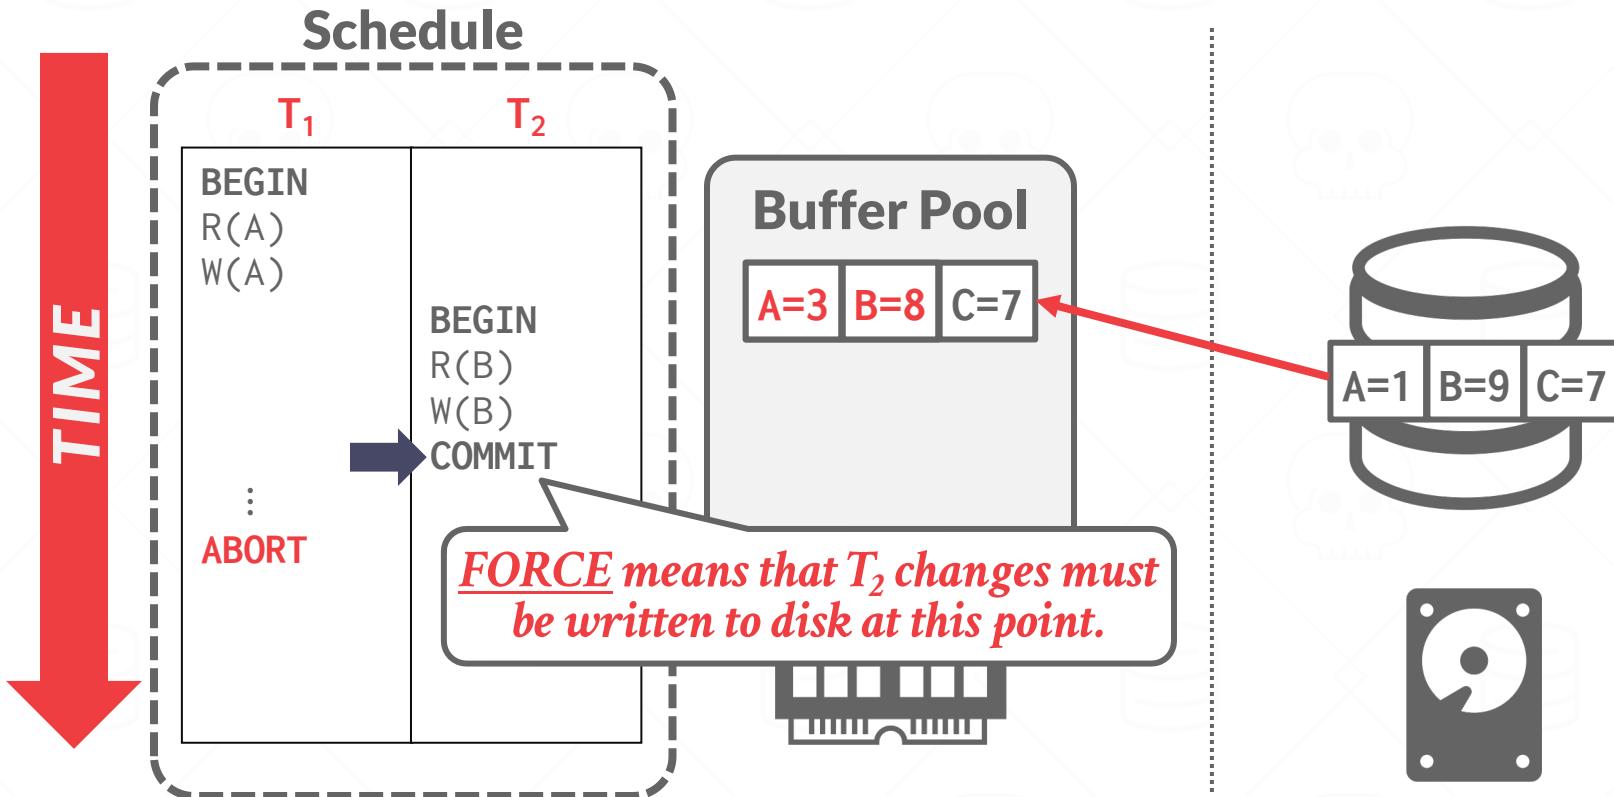


# NO-STEAL + FORCE

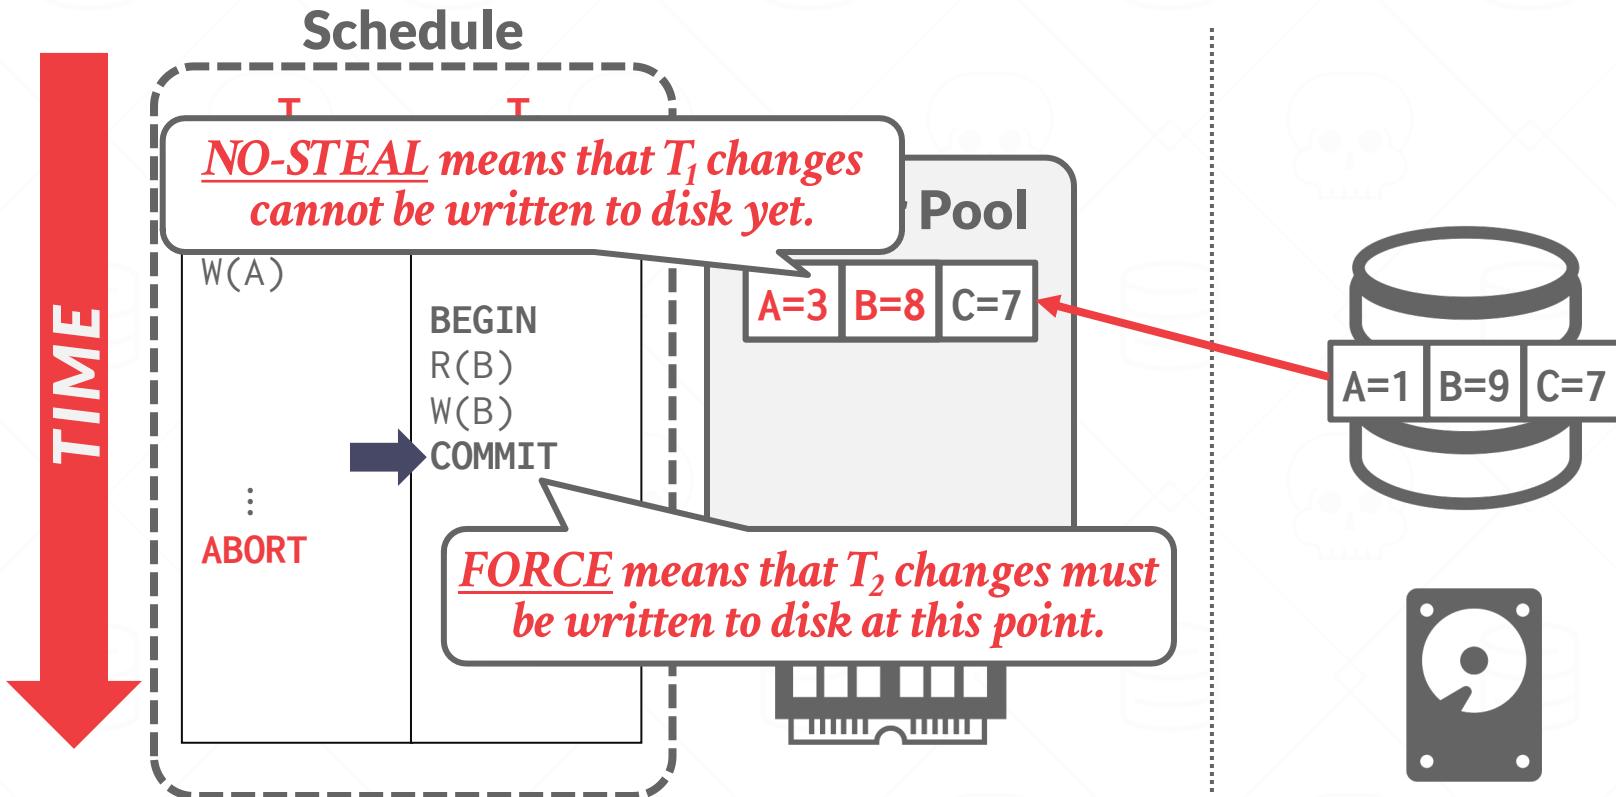


# NO-STEAL + FORCE

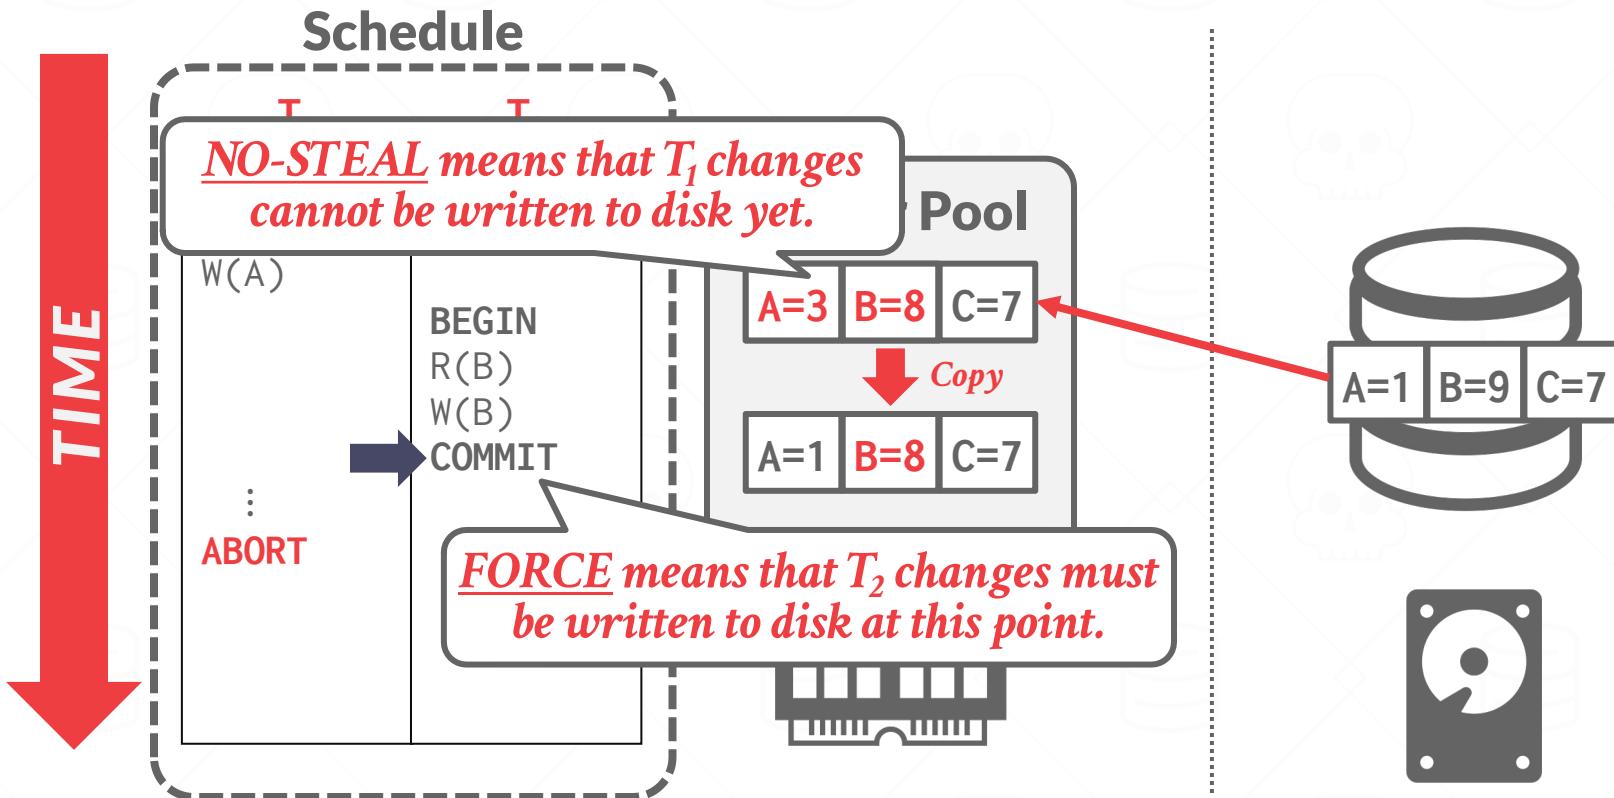

# NO-STEAL + FORCE

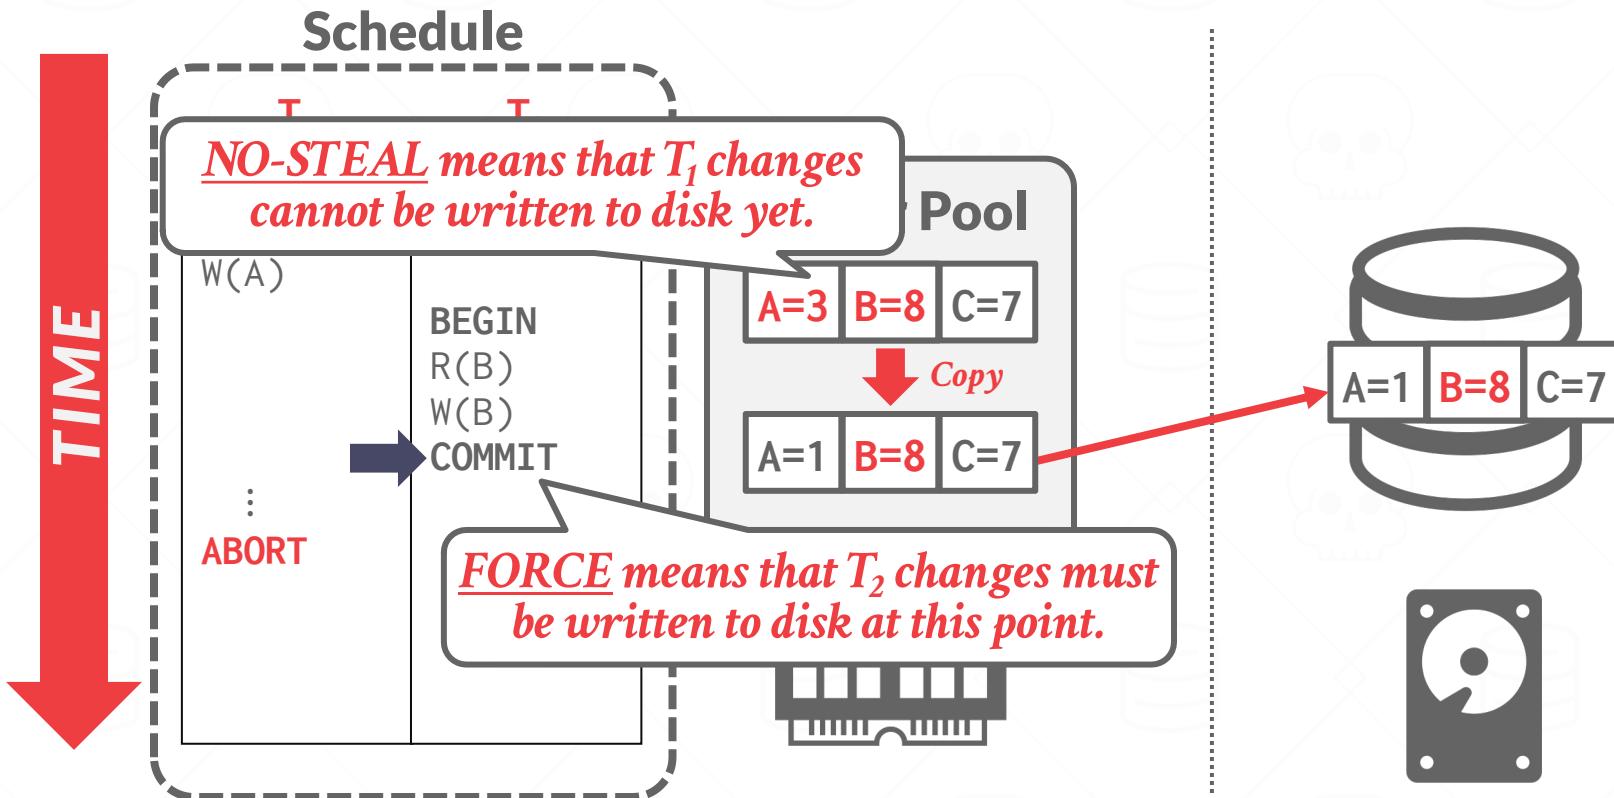

# NO-STEAL + FORCE

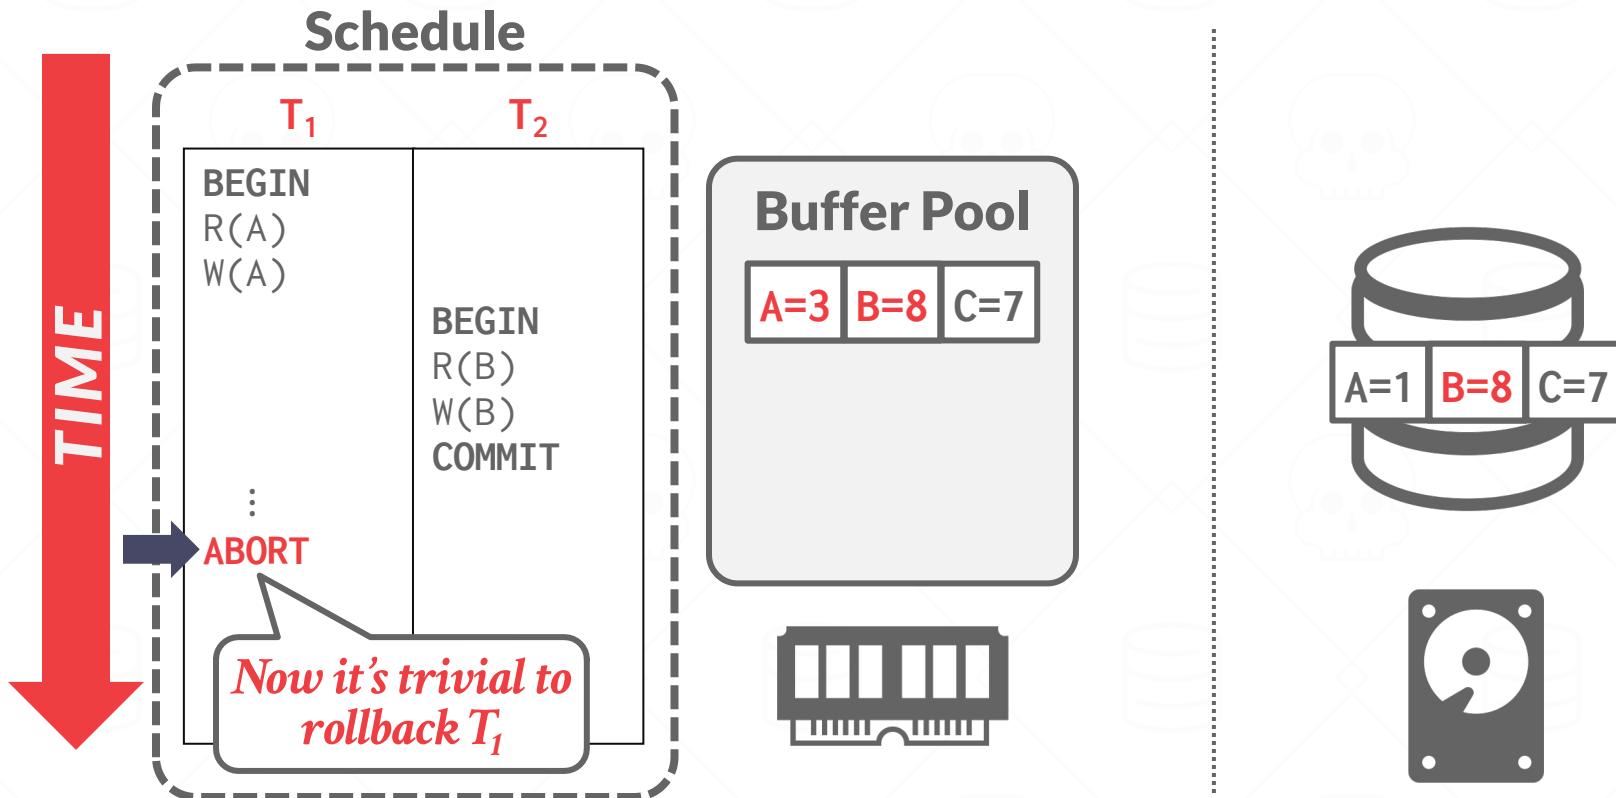

# NO-STEAL + FORCE

---

This approach is the easiest to implement:

- Never have to undo changes of an aborted txn because the changes were not written to disk.
- Never have to redo changes of a committed txn because all the changes are guaranteed to be written to disk at commit time (assuming atomic hardware writes).

Previous example cannot support **write sets** that exceed the amount of physical memory available.

# SHADOW PAGING

---


Instead of copying the entire database, the DBMS copies pages on write to create two versions:

- Master: Contains only changes from committed txns.
- Shadow: Temporary database with changes made from uncommitted txns.


To install updates when a txn commits, overwrite the root so it points to the shadow, thereby swapping the master and shadow.

Buffer Pool Policy: **NO-STEAL + FORCE**

# SHADOW PAGING – EXAMPLE

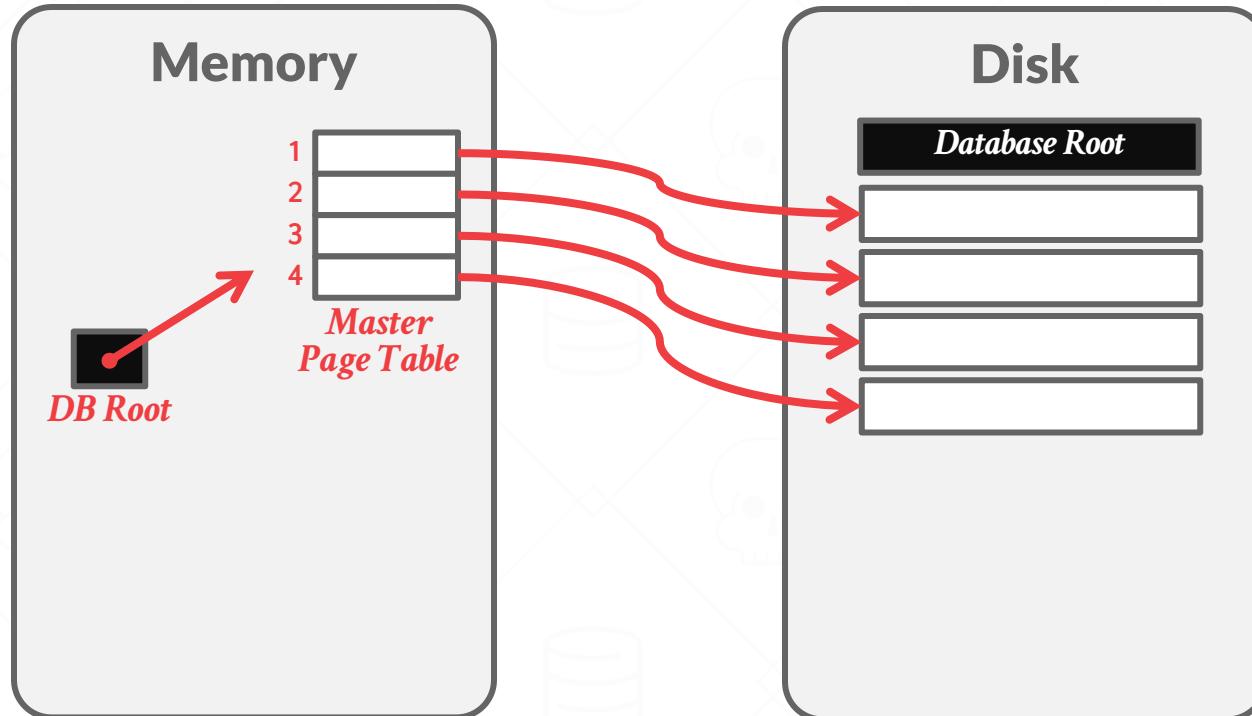


# SHADOW PAGING – EXAMPLE

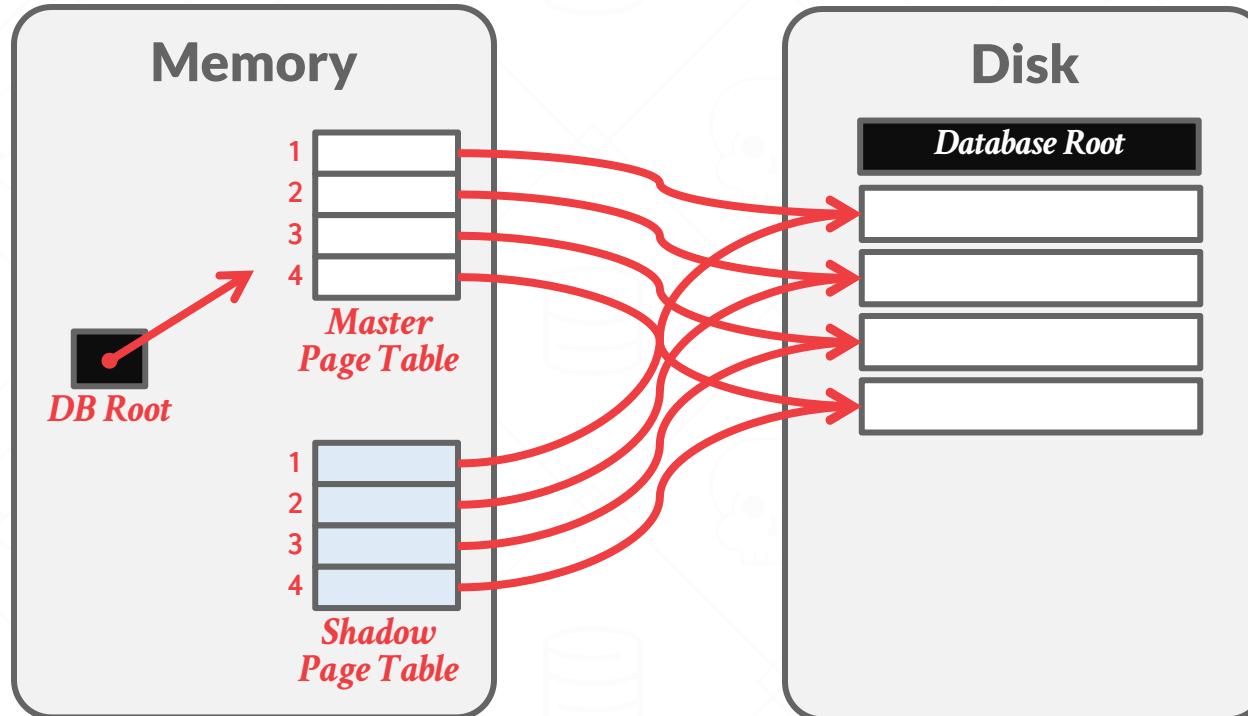


**Txn  $T_1$**


# SHADOW PAGING – EXAMPLE

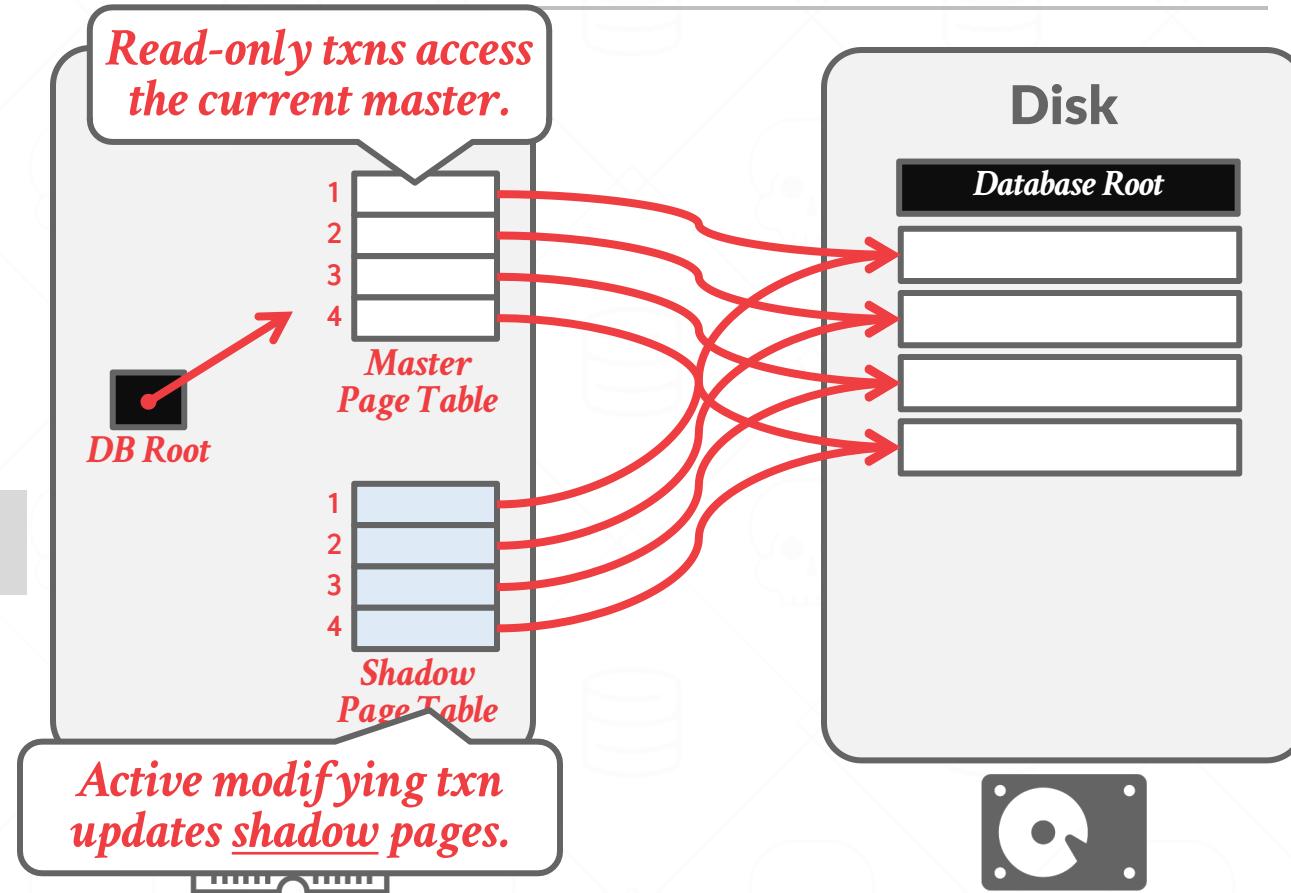


# SHADOW PAGING - EXAMPLE

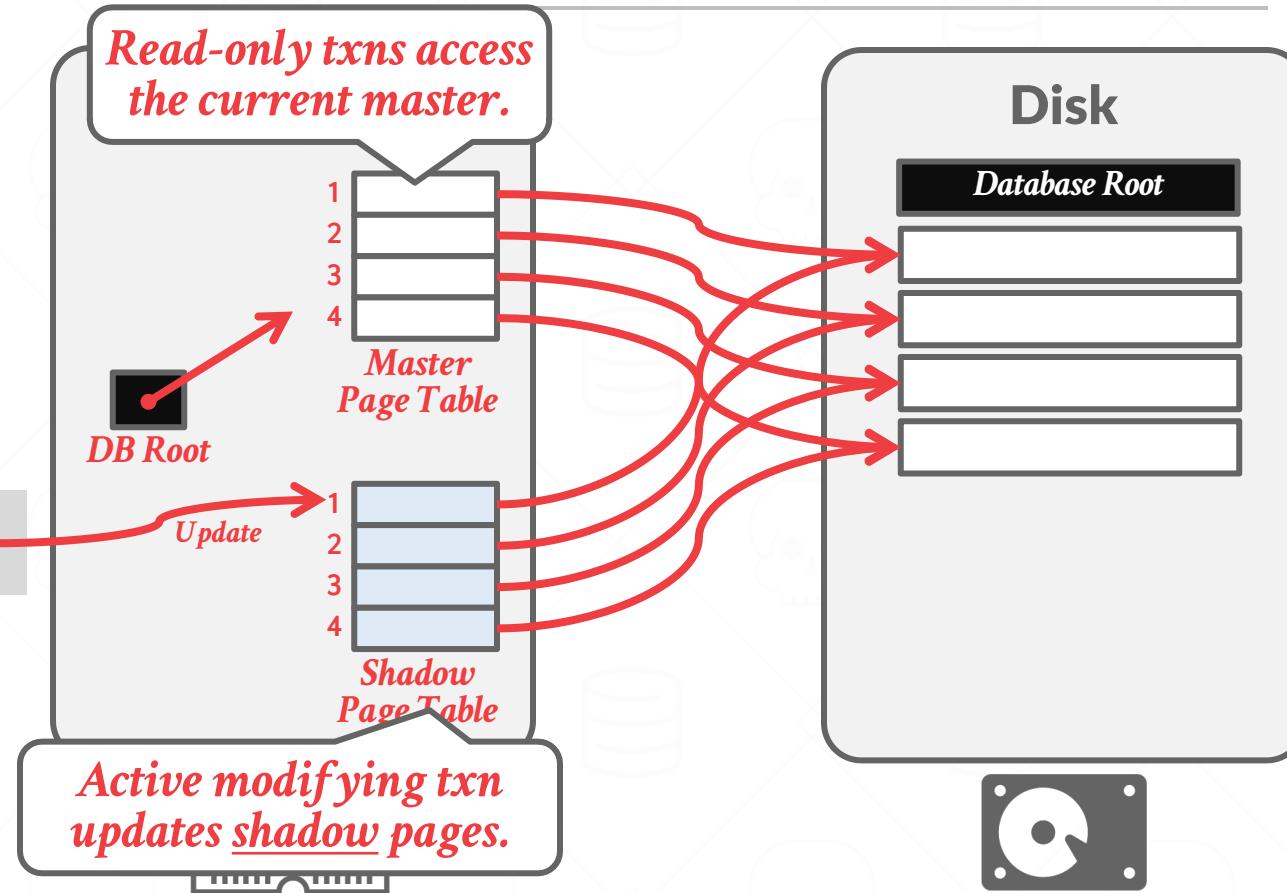


# SHADOW PAGING - EXAMPLE

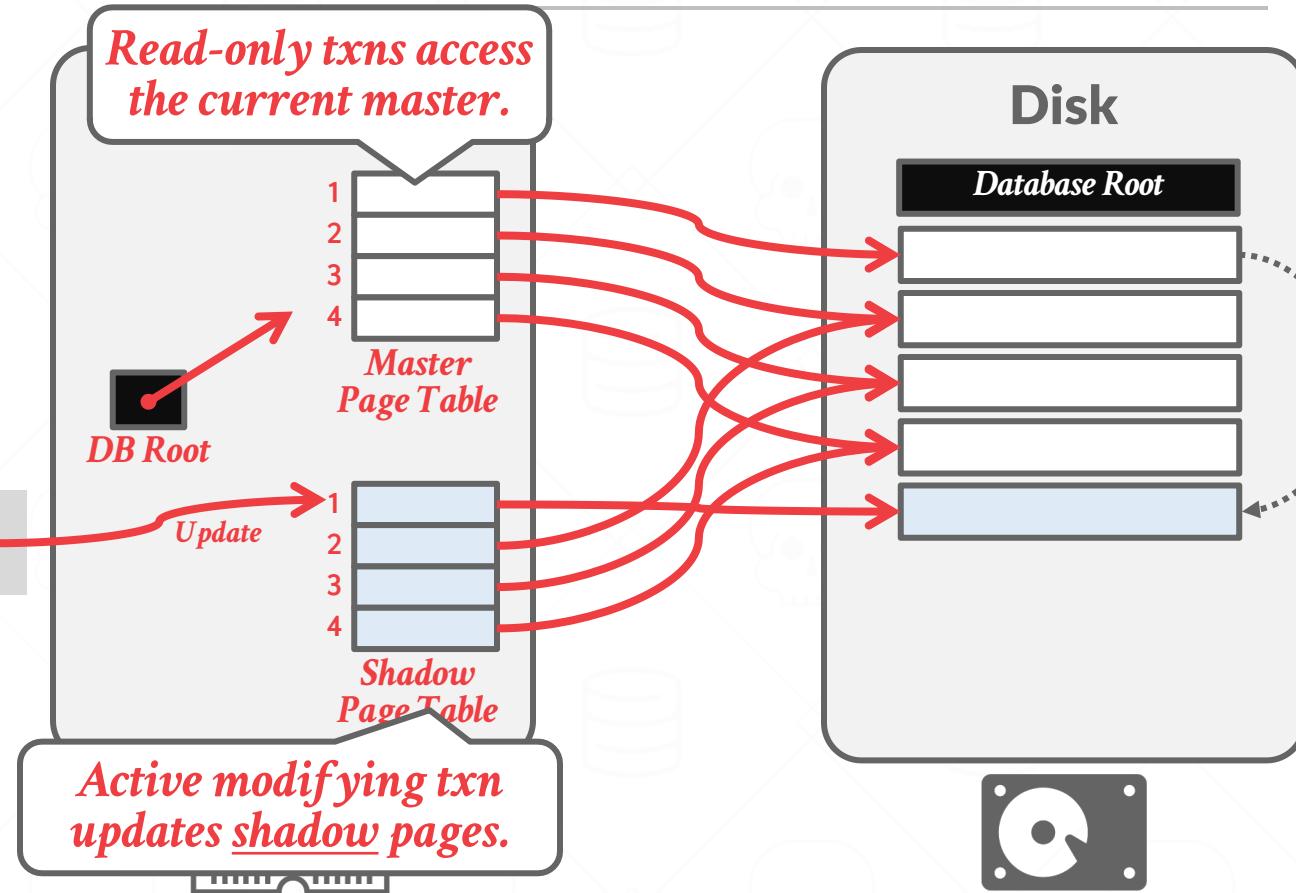


# SHADOW PAGING - EXAMPLE

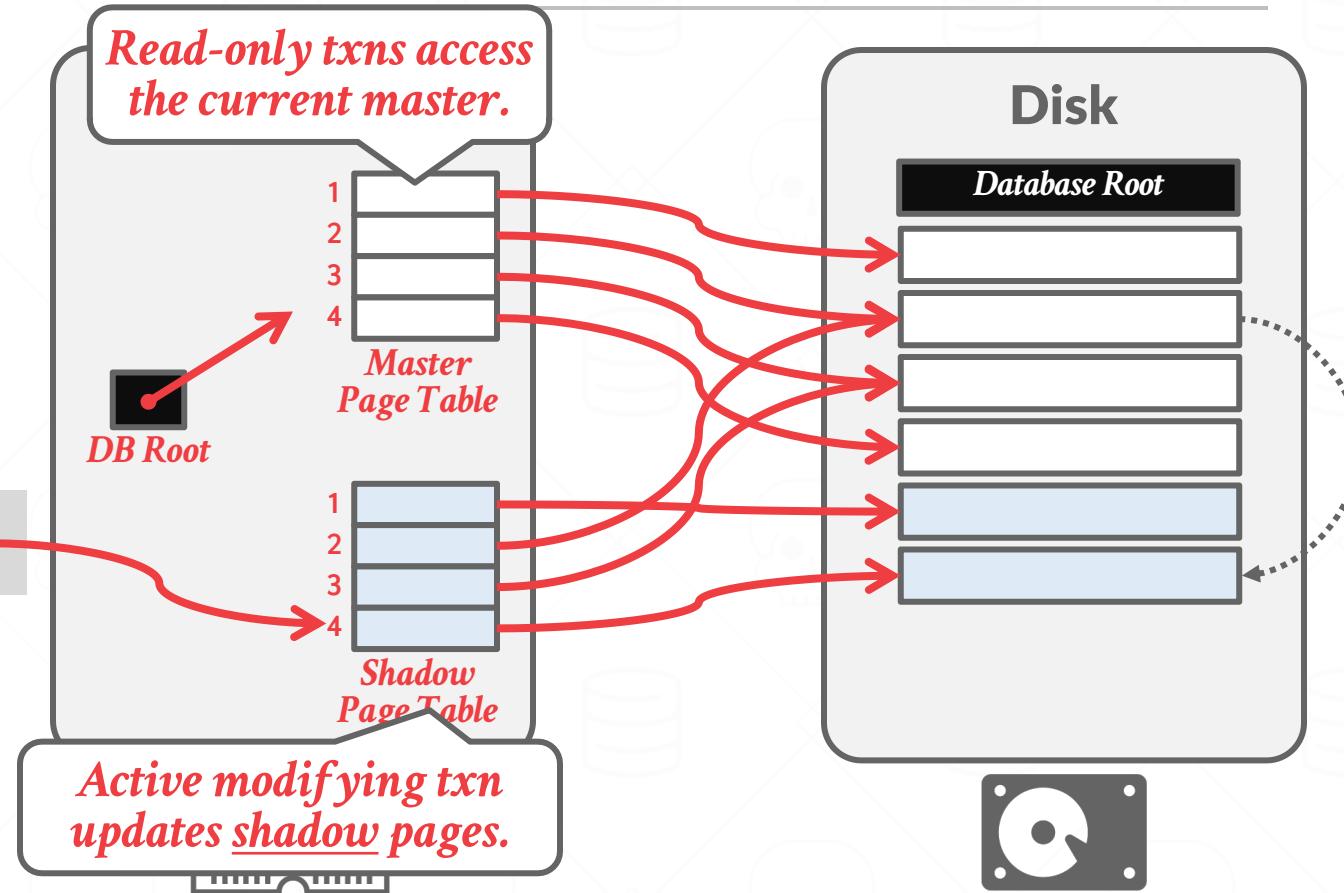


# SHADOW PAGING - EXAMPLE

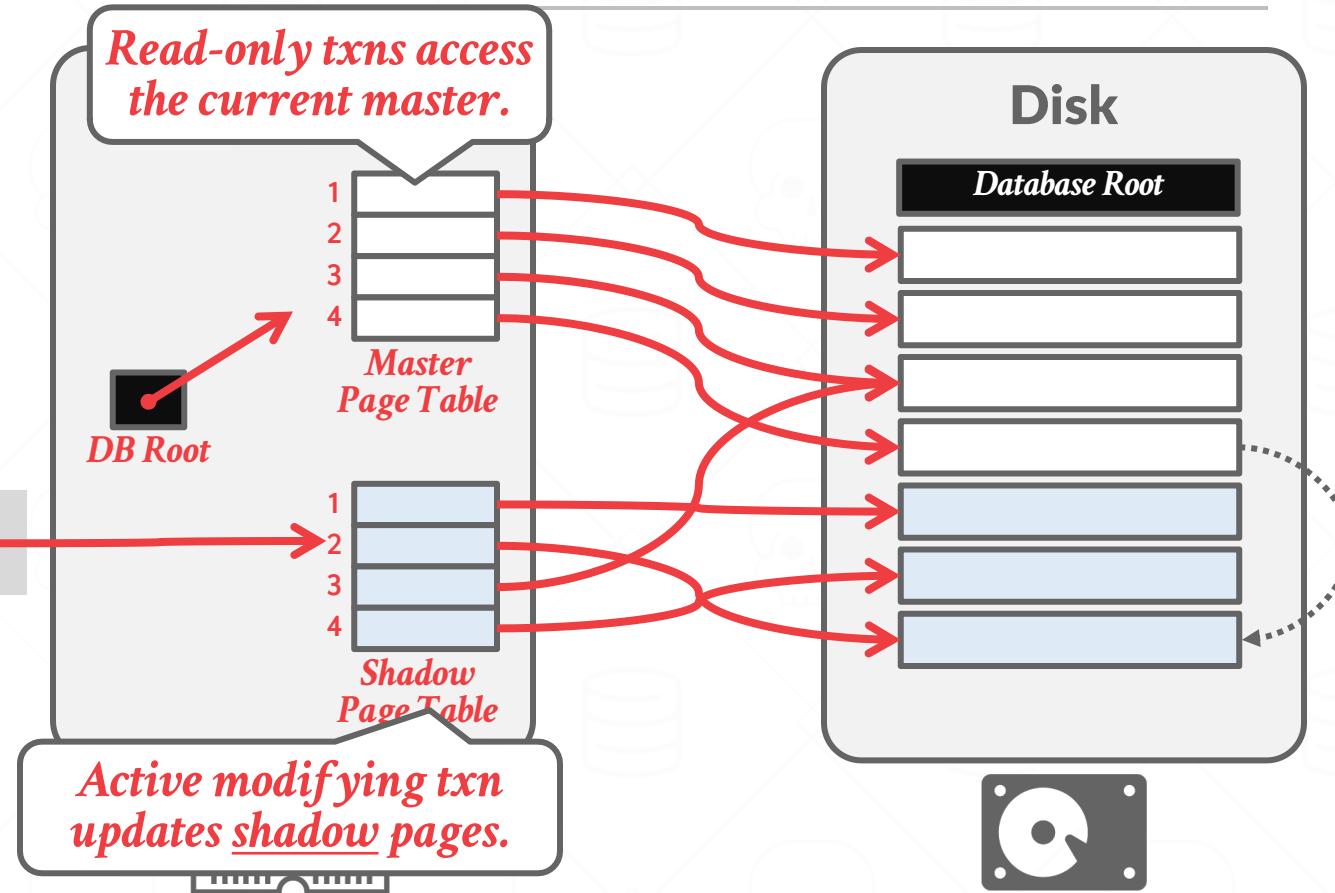


# SHADOW PAGING - EXAMPLE

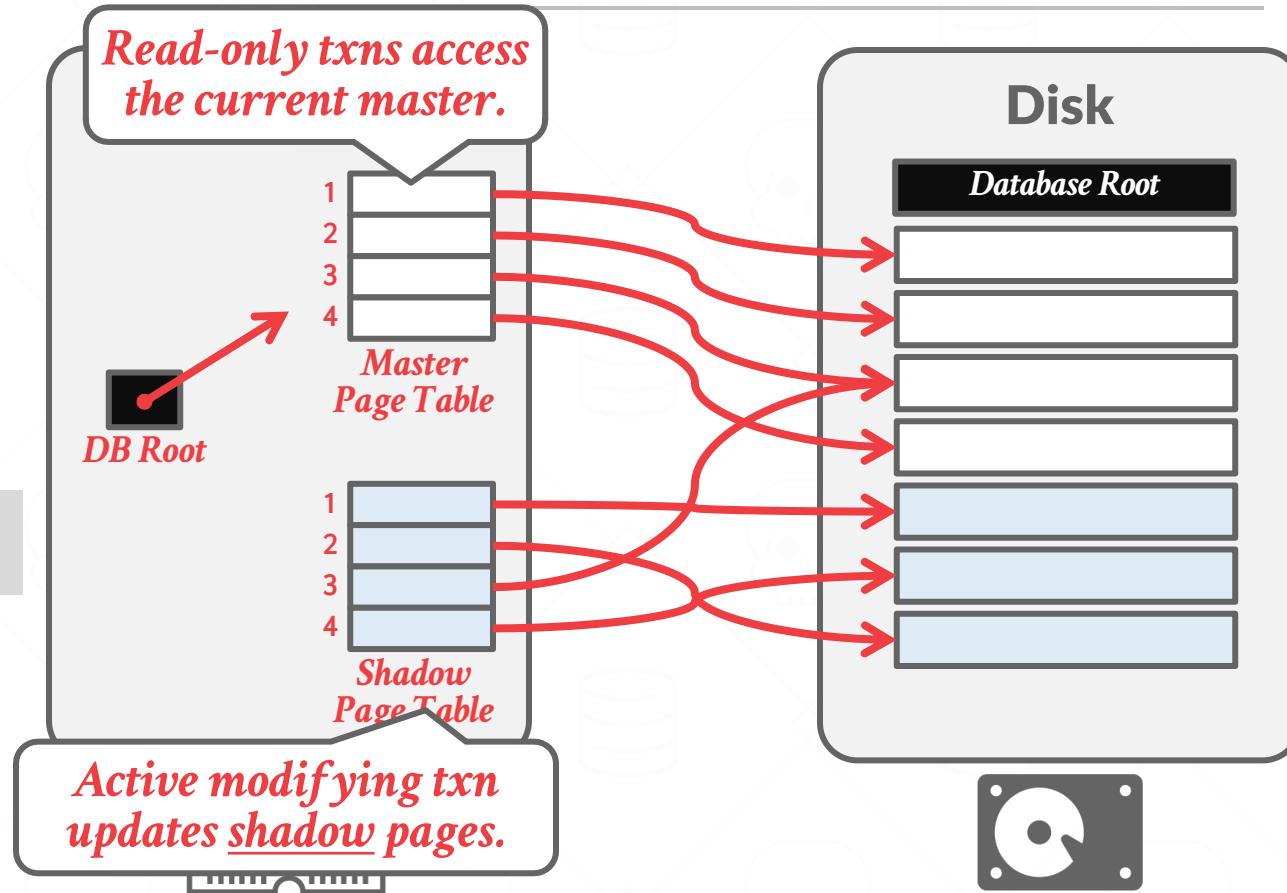


# SHADOW PAGING - EXAMPLE

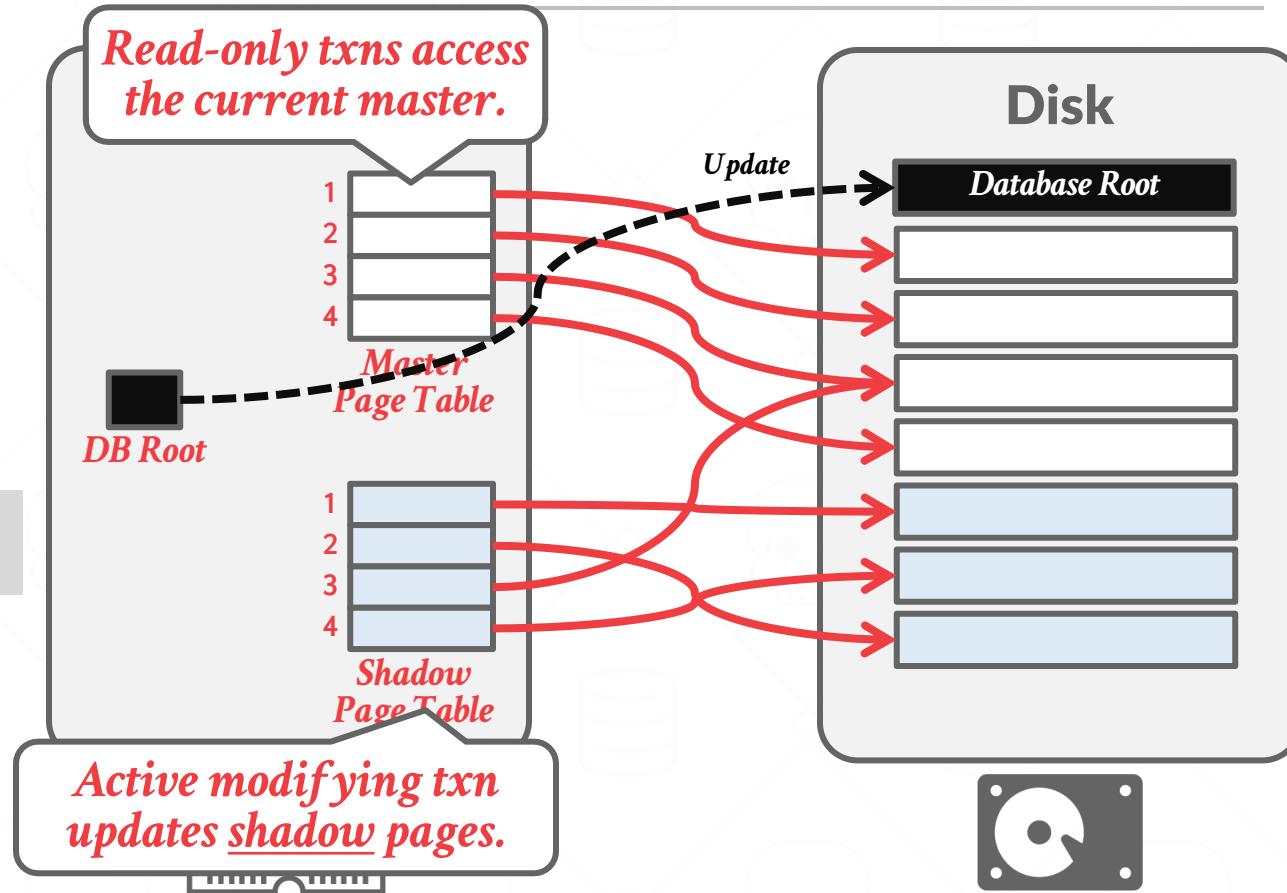


# SHADOW PAGING - EXAMPLE

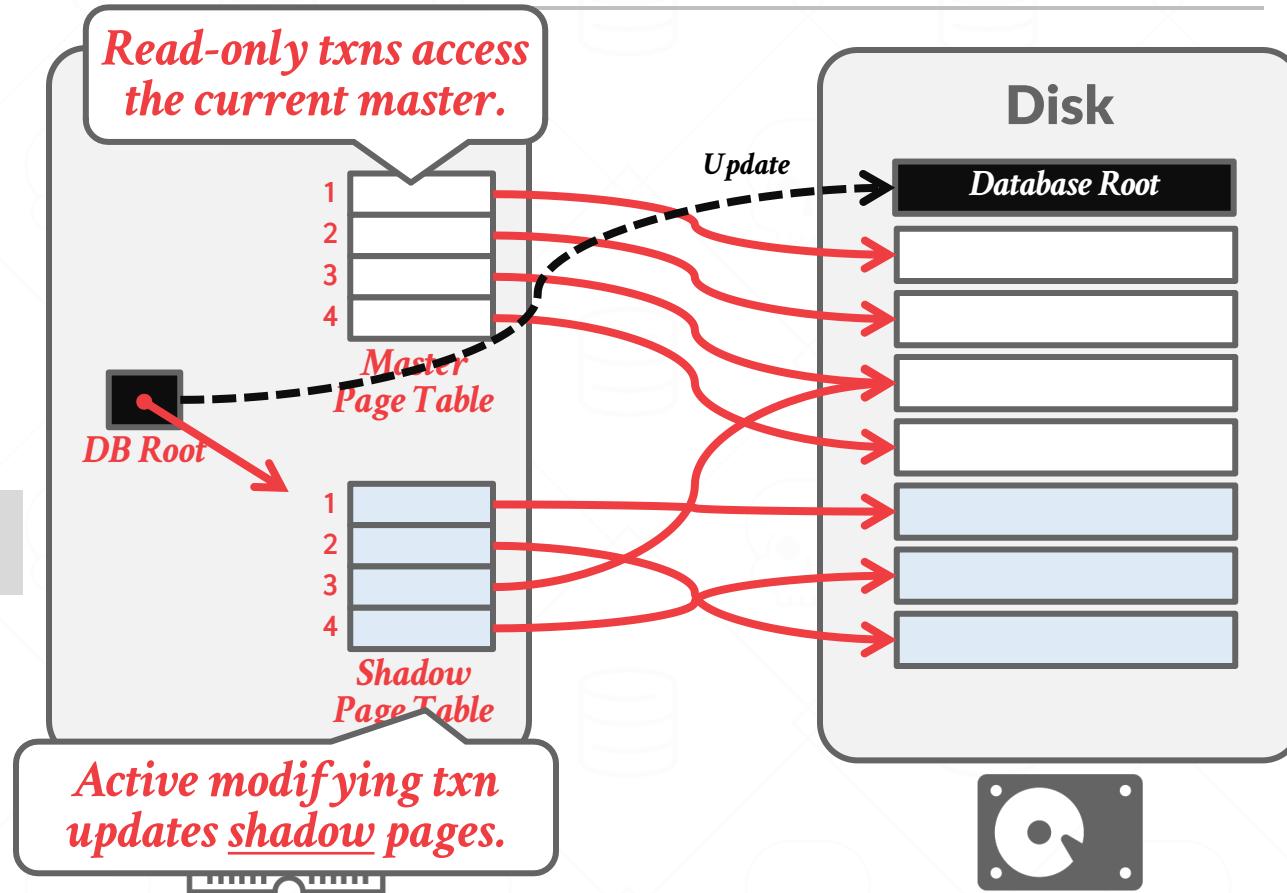

# SHADOW PAGING - EXAMPLE

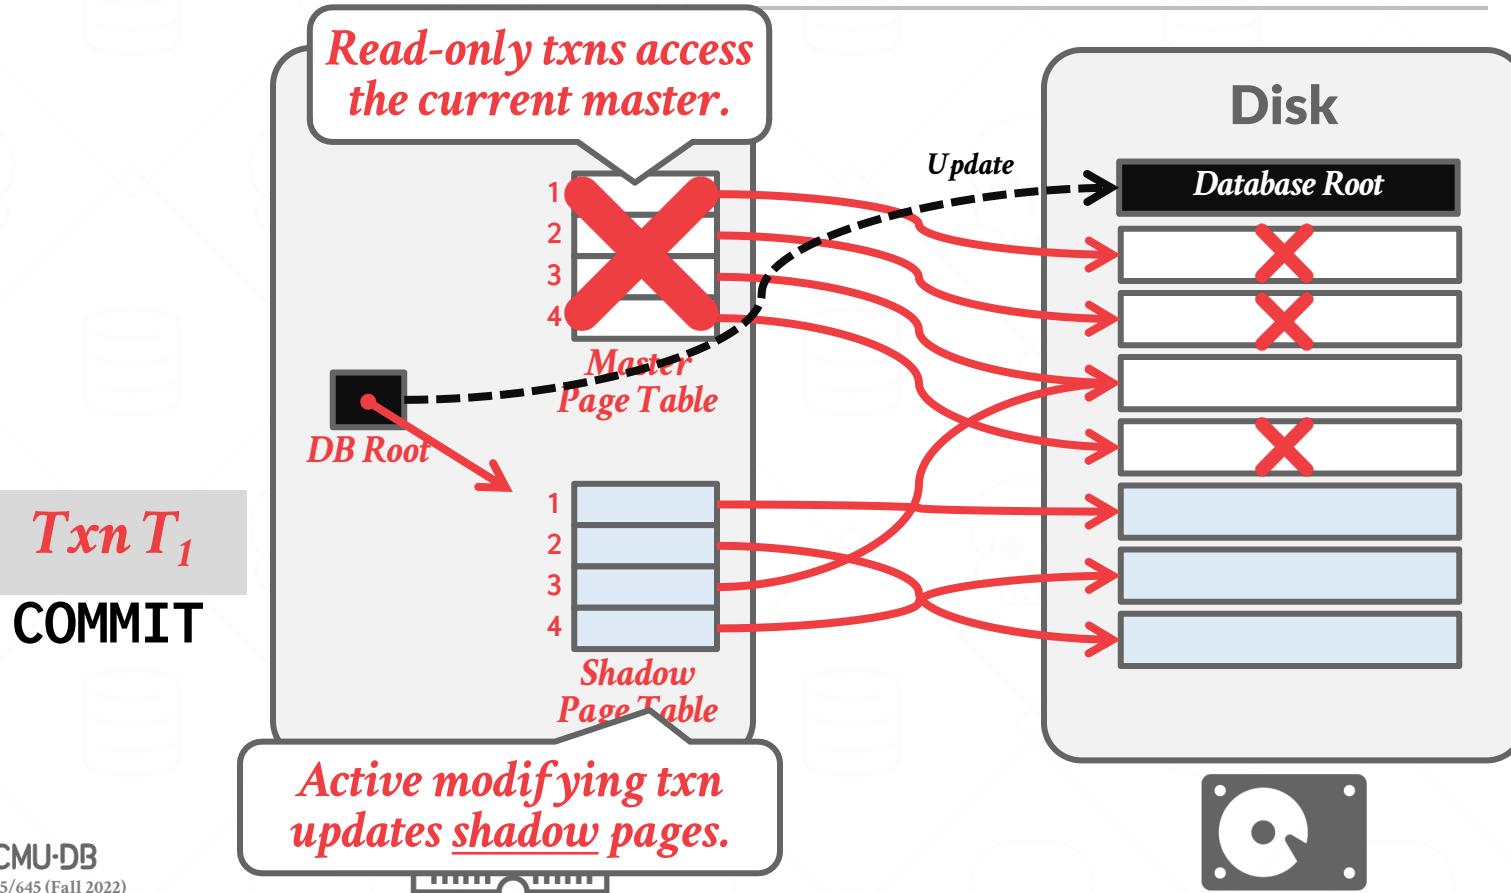

# SHADOW PAGING – EXAMPLE

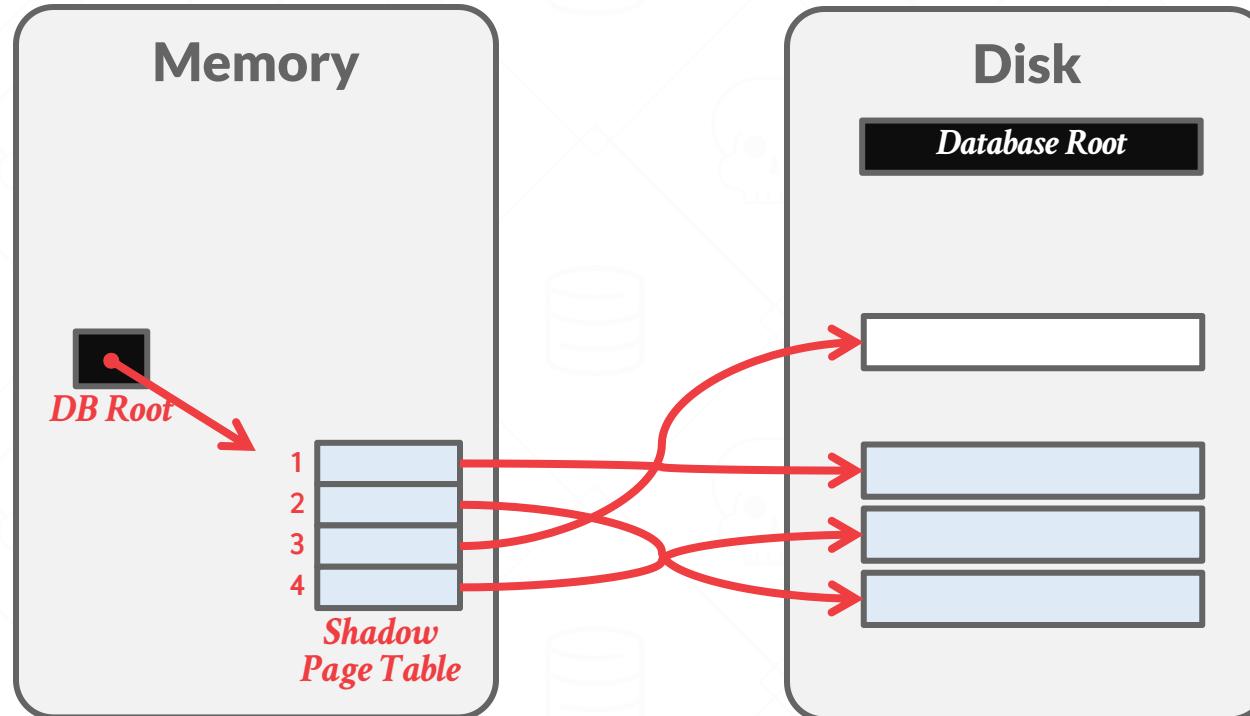

# SHADOW PAGING – UNDO/REDO

Supporting rollbacks and recovery is easy.

**Undo:** Remove the shadow pages. Leave the master and the DB root pointer alone.

**Redo:** Not needed at all.

Shadow paging has lots of issues (read the following slides), and is inferior to WAL. So let's talk about WAL.

*See the Lec12-Logging YouTube video from Fall'22 if you need more details.*

# SHADOW PAGING – DISADVANTAGES

---

Copying the entire page table is expensive:

- Use a page table structured like a B+tree (LMDB).
- No need to copy entire tree, only need to copy paths in the tree that lead to updated leaf nodes.

Commit overhead is high:


- Flush every updated page, page table, and root.
- Data gets fragmented (bad for sequential scans).
- Need garbage collection.
- Only supports one writer txn at a time or txns in a batch.

# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

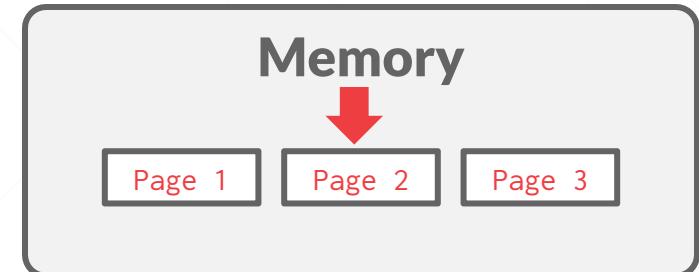


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

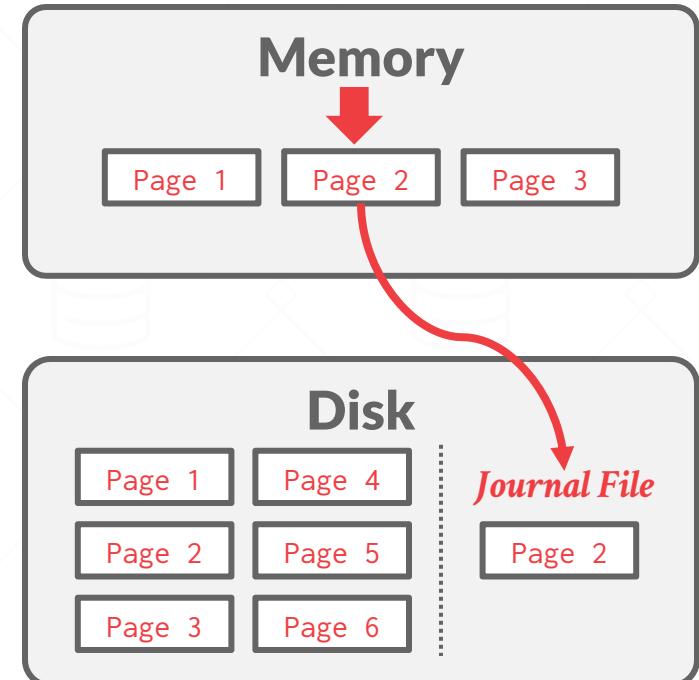


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

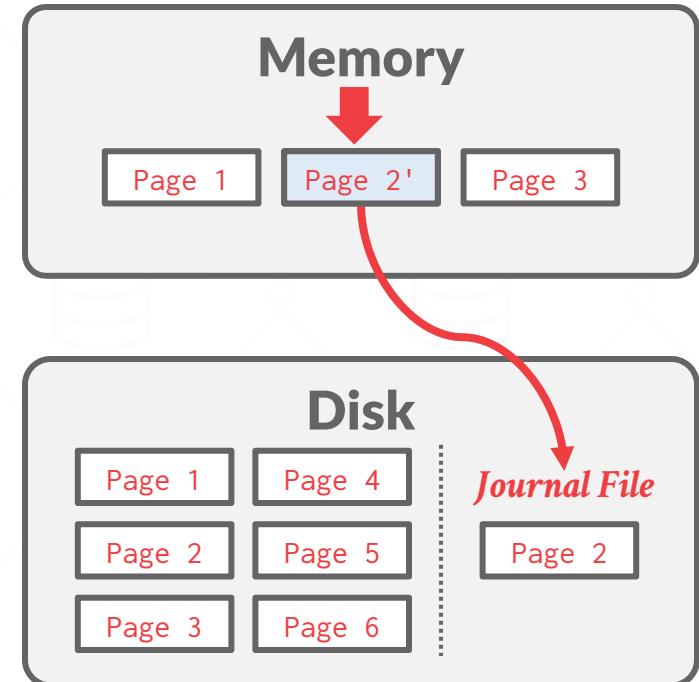


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

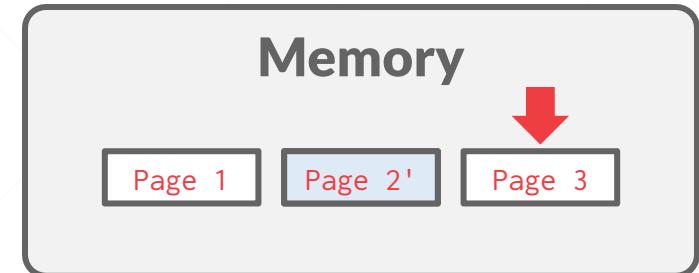


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

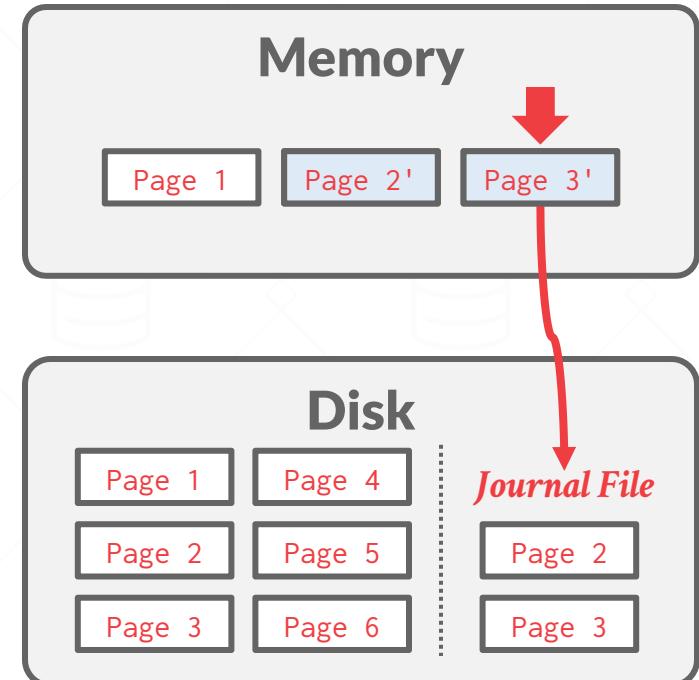


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

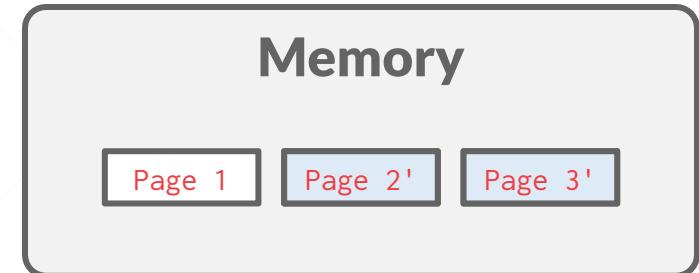


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

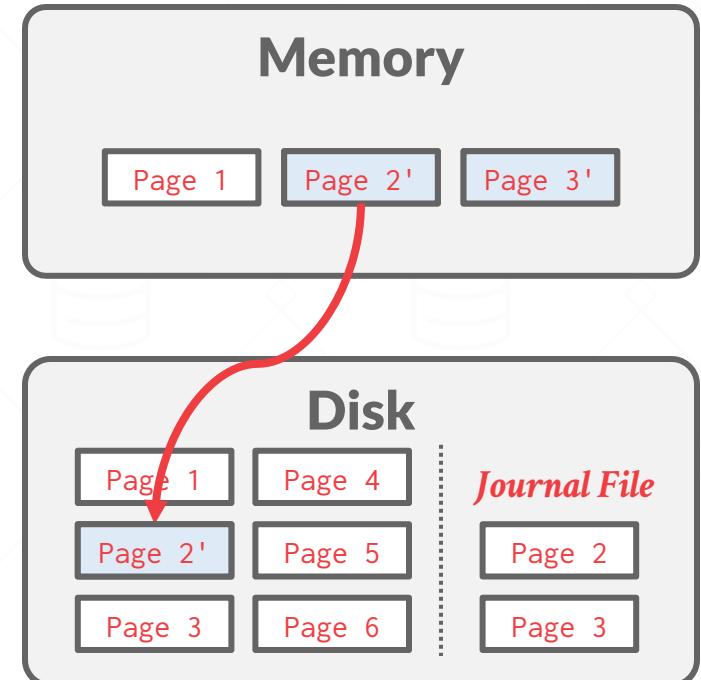


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.


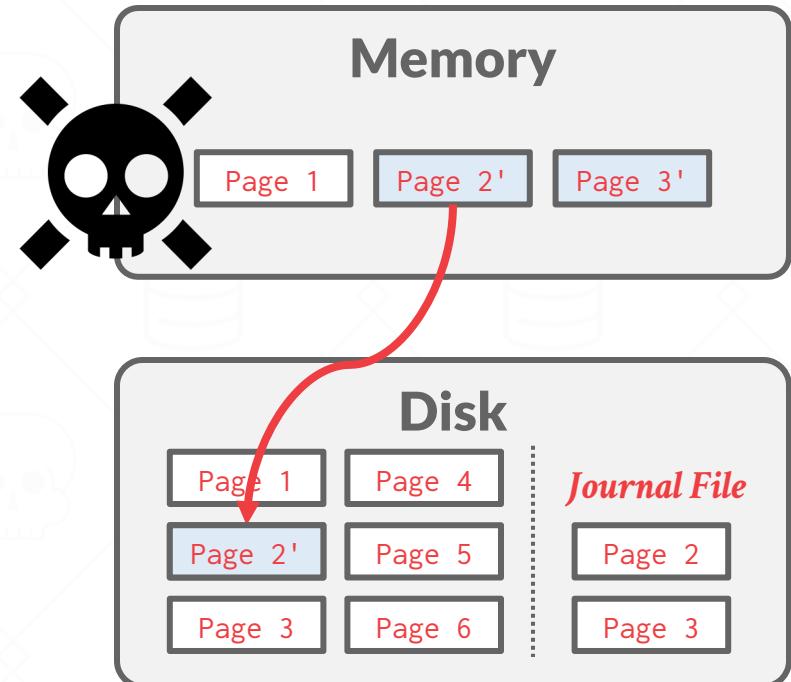


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

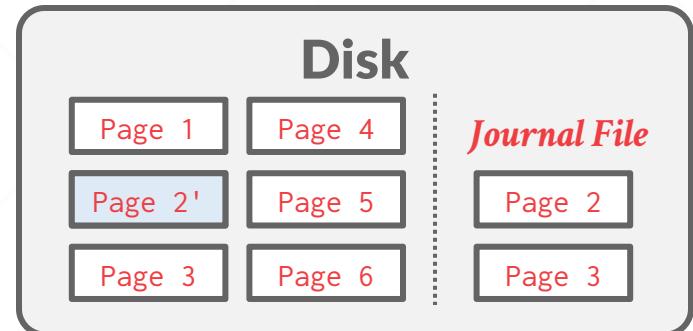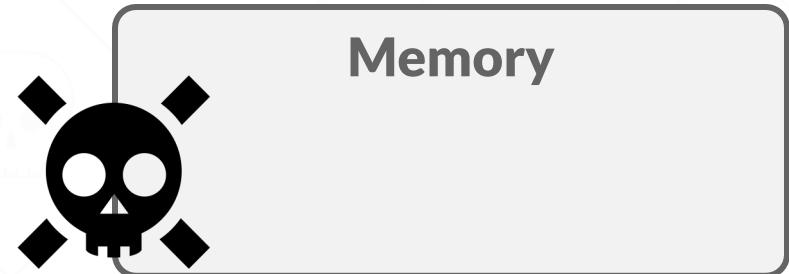


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

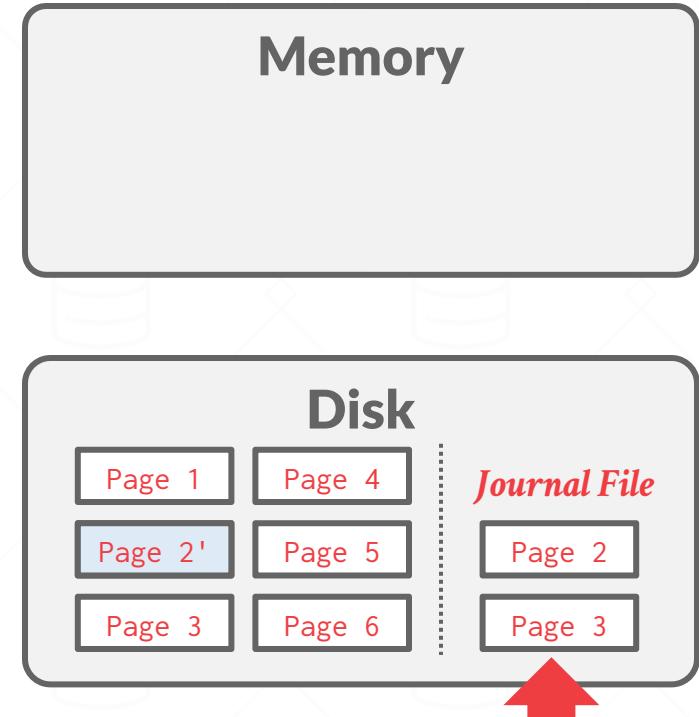


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

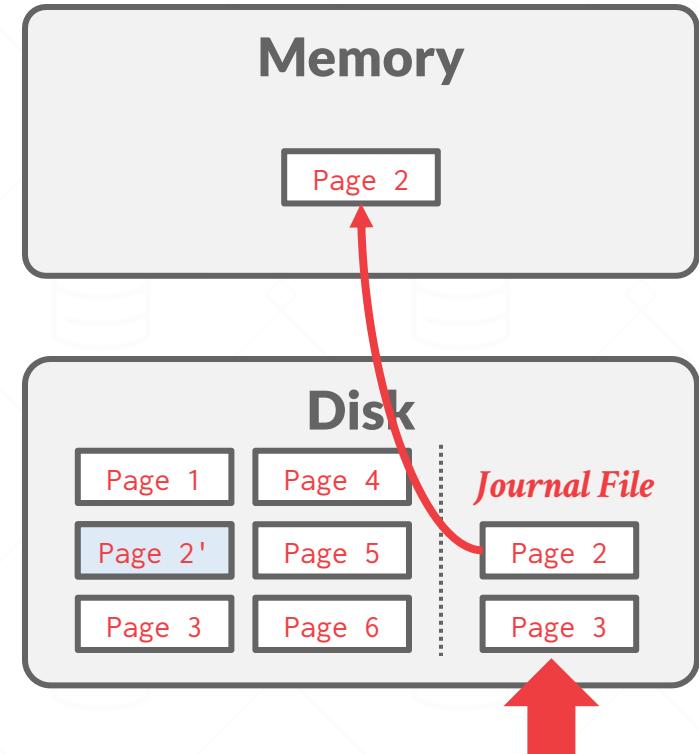


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.


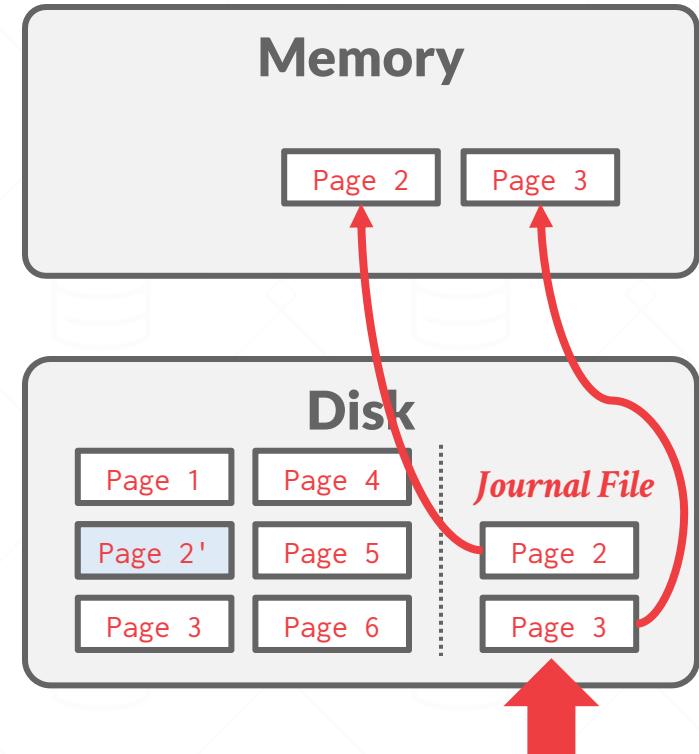


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

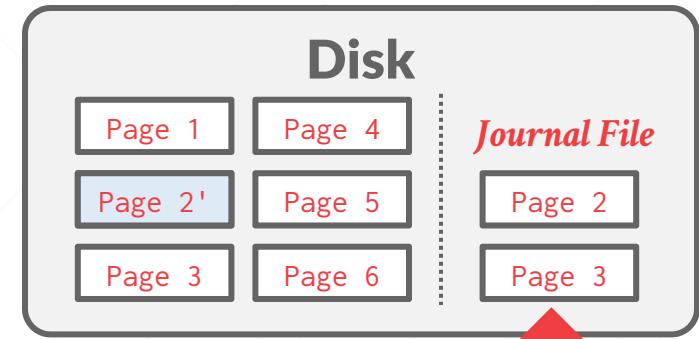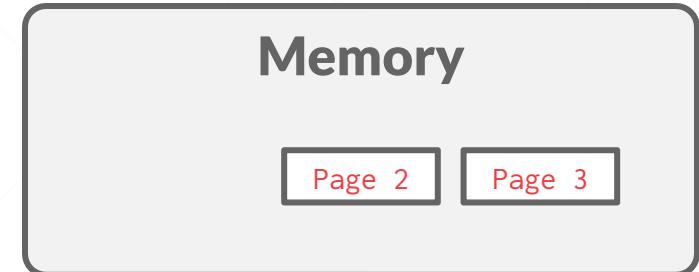


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

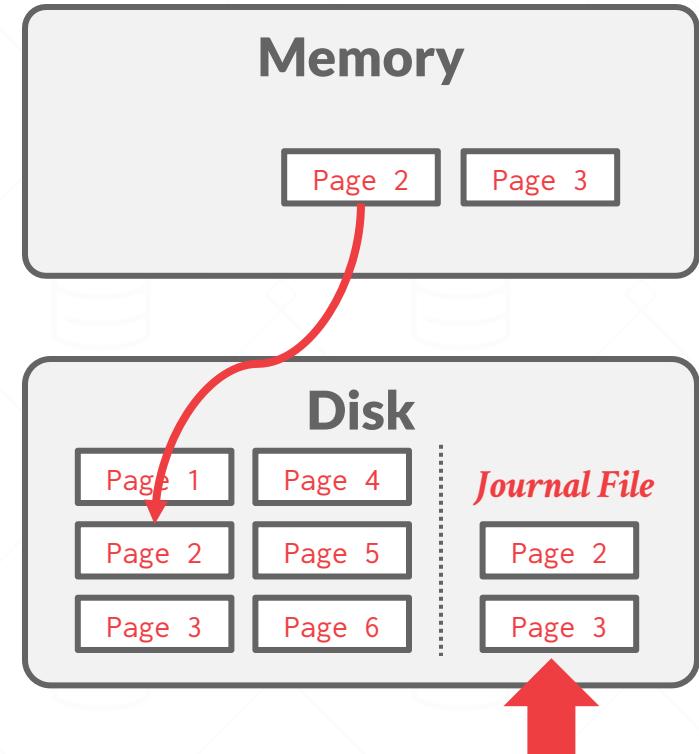


# SQLITE (PRE-2010)

When a txn modifies a page, the DBMS copies the original page to a separate journal file before overwriting master version.

→ Called “rollback mode”.

After restarting, if a journal file exists, then the DBMS restores it to undo changes from uncommitted txns.

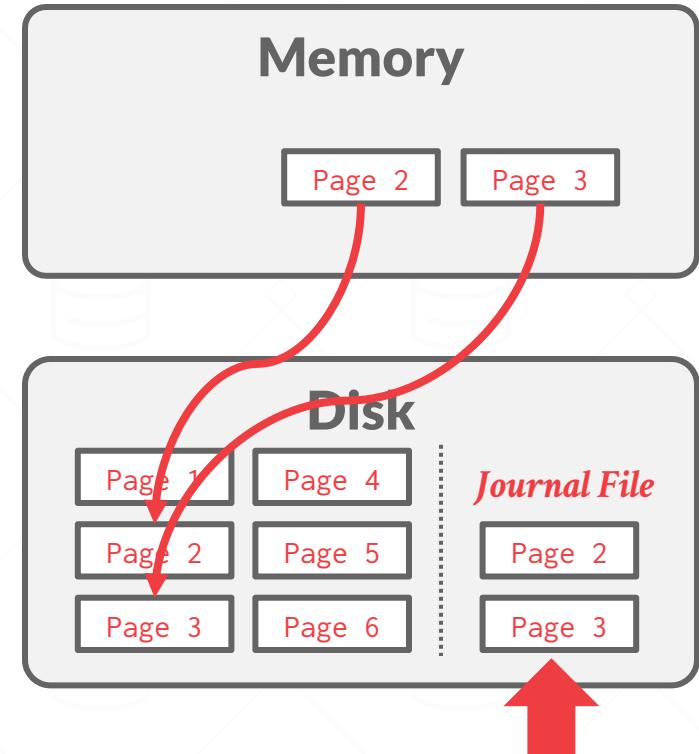

# OBSERVATION

---

Shadowing page requires the DBMS to perform writes to random non-contiguous pages on disk.

We need a way for the DBMS convert random writes into sequential writes.

# WRITE-AHEAD LOG


Maintain a log file separate from data files that contains the changes that txns make to database.

- Assume that the log is on stable storage.
- Log contains enough information to perform the necessary undo and redo actions to restore the database.

DBMS must write to disk the log file records that correspond to changes made to a database object before it can flush that object to disk.

Buffer Pool Policy: **STEAL + NO-FORCE**

# BUFFER POOL AND WAL

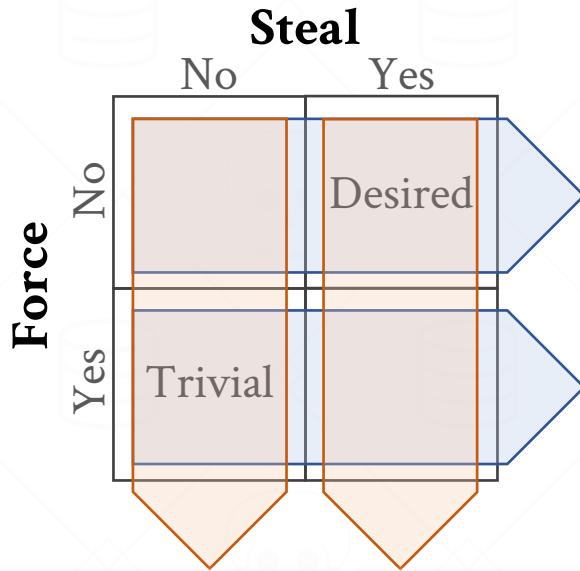

## Steal

No Steal

Low throughput,  
but works for  
aborted txns.

## No Force

Concern: Crash before a page is flushed to disk. Durability?

**Solution:** Force a summary/log @ commit. Use to **REDO**.

**Force** (on every update, flush the updated page to disk)

Poor response time, but enforces durability of committed txns.

## Steal

(flush an unpinned dirty page even if the updating txn. is active)

Concern: A stolen+flushed page was modified by an uncommitted txn. T.

If T aborts, how is atomicity enforced?

**Solution:** Remember old value (logs). Use to **UNDO**.

# WAL PROTOCOL

---

The DBMS stages all a txn's log records in volatile storage (usually backed by buffer pool).

All log records pertaining to an updated page are written to non-volatile storage before the page itself is over-written in non-volatile storage.

A txn is not considered committed until all its log records have been written to stable storage.

# WAL PROTOCOL

---

Write a <**BEGIN**> record to the log for each txn to mark its starting point.

When a txn finishes, the DBMS will:

- Write a <**COMMIT**> record on the log.
- Make sure that all log records are flushed before it returns an acknowledgement to application.


# WAL PROTOCOL

Each log entry contains information about the change to a single object:


- Transaction Id
- Object Id
- Before Value (UNDO)
- After Value (REDO)

*Not necessary if using  
append-only MVCC*


# WAL - EXAMPLE

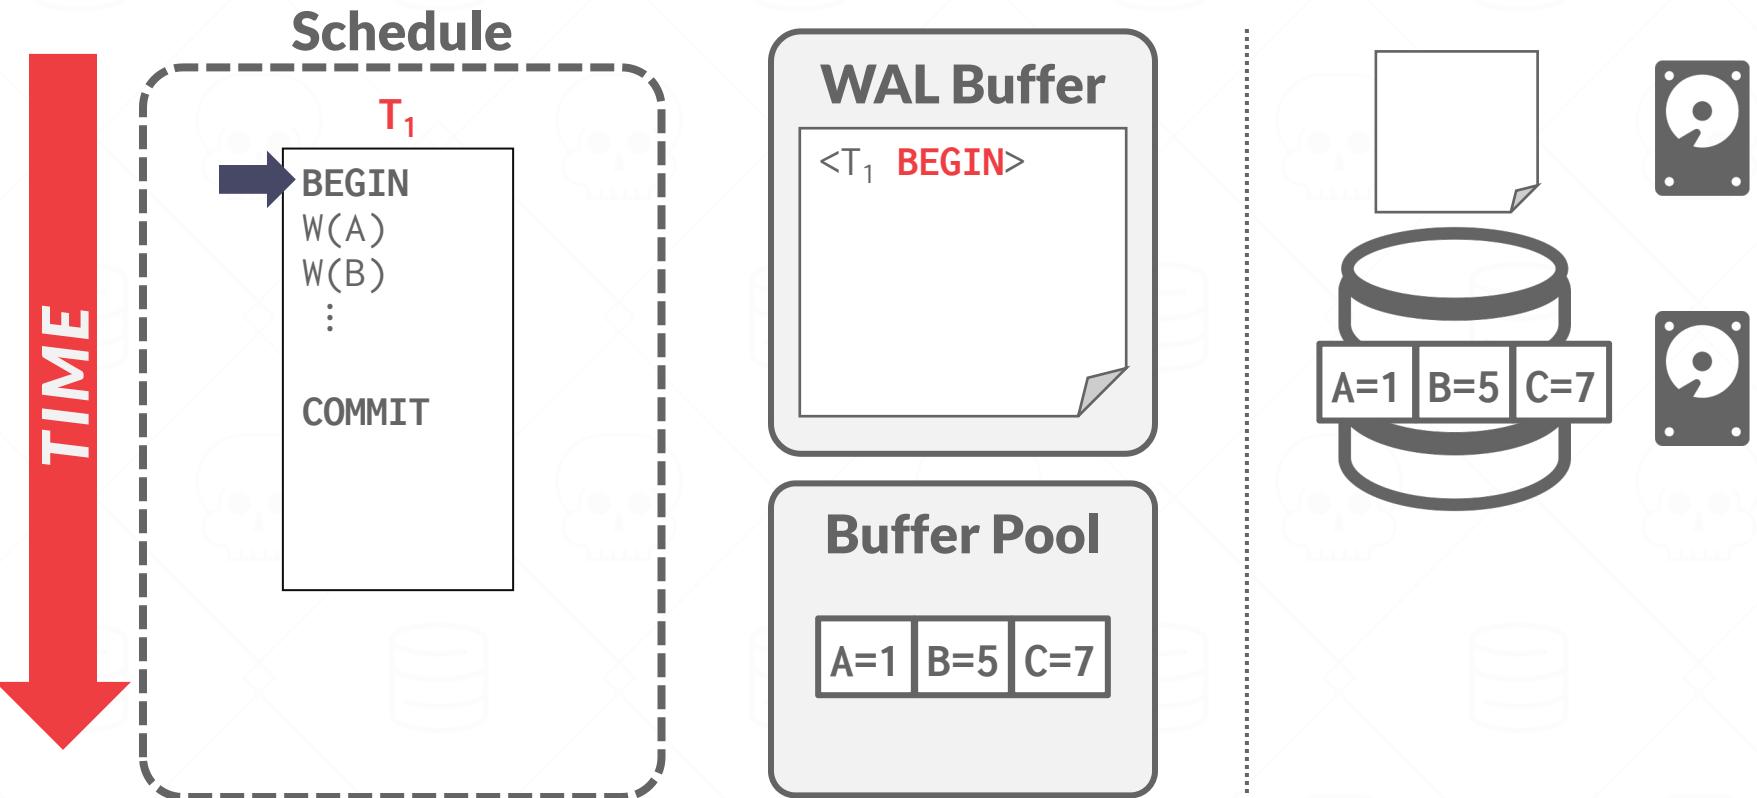


# WAL - EXAMPLE

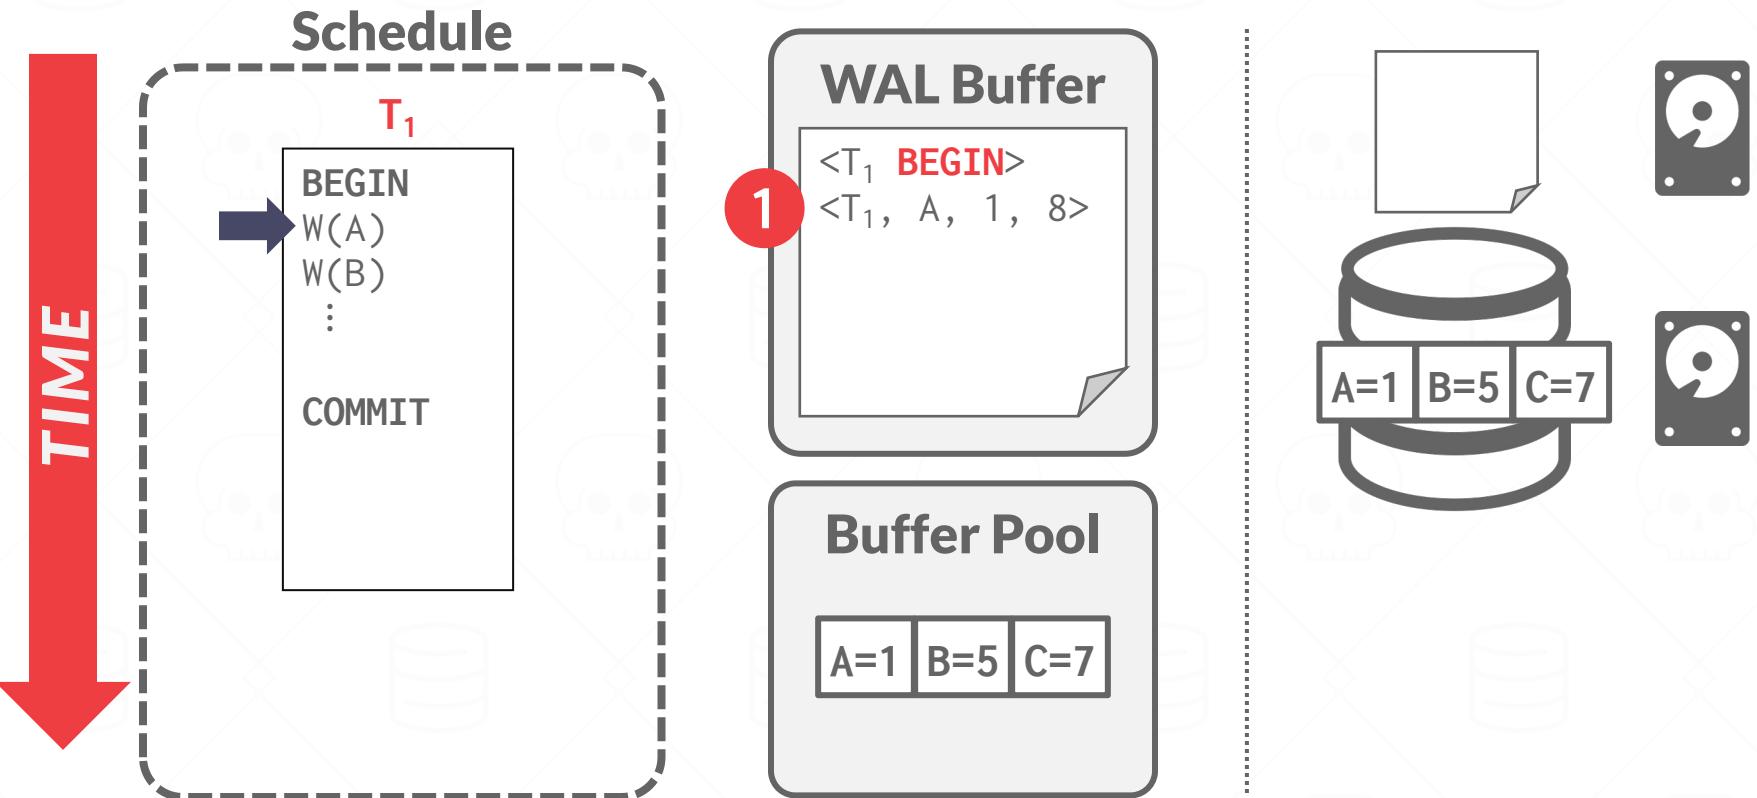


# WAL - EXAMPLE

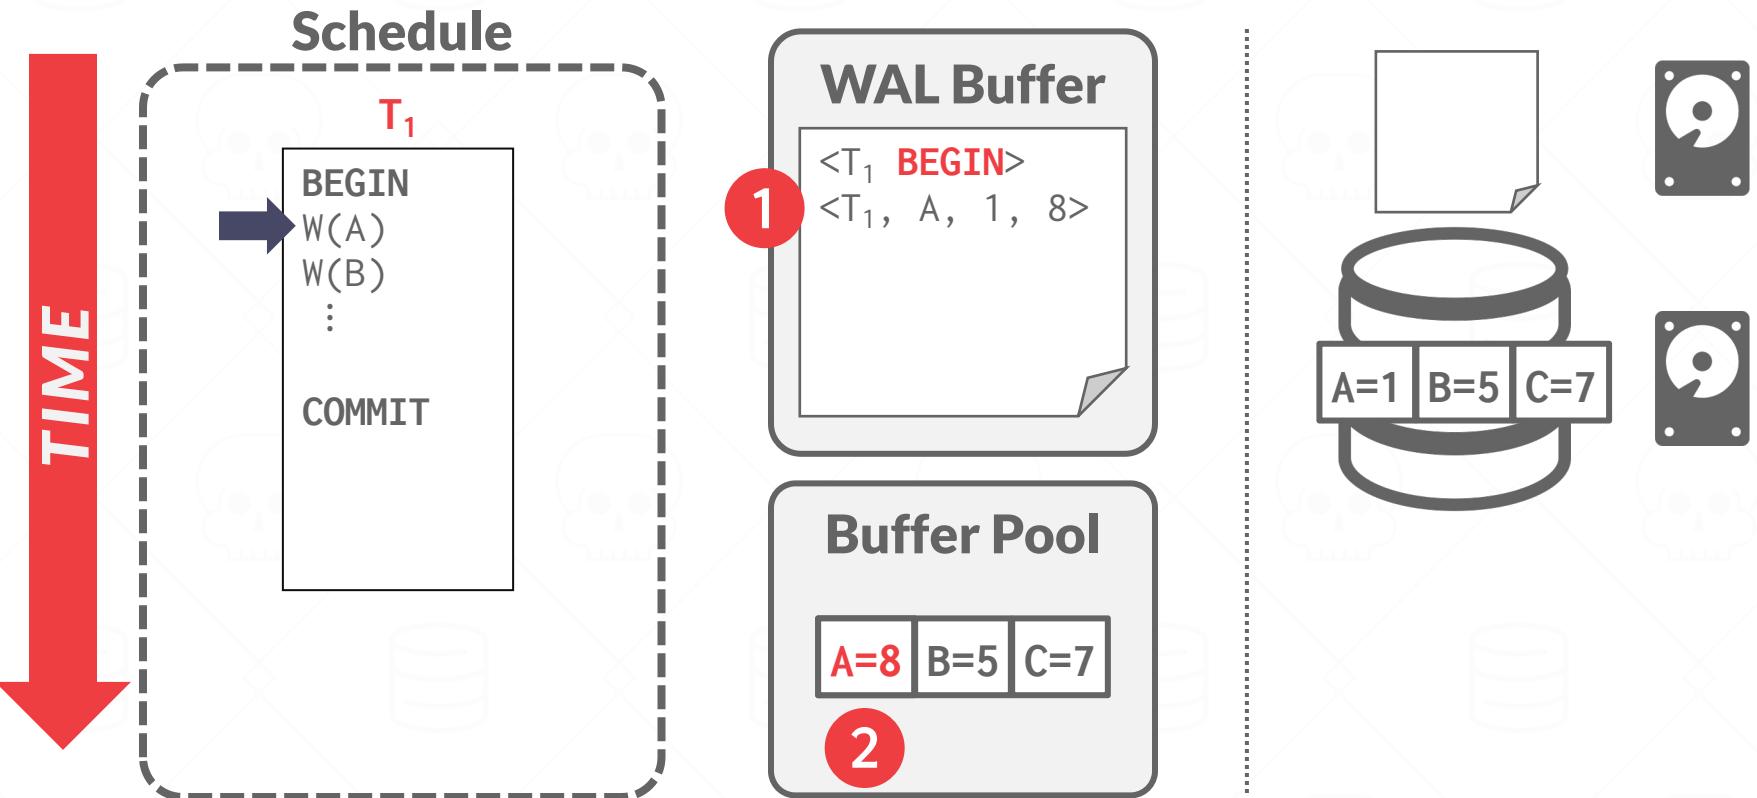


# WAL - EXAMPLE

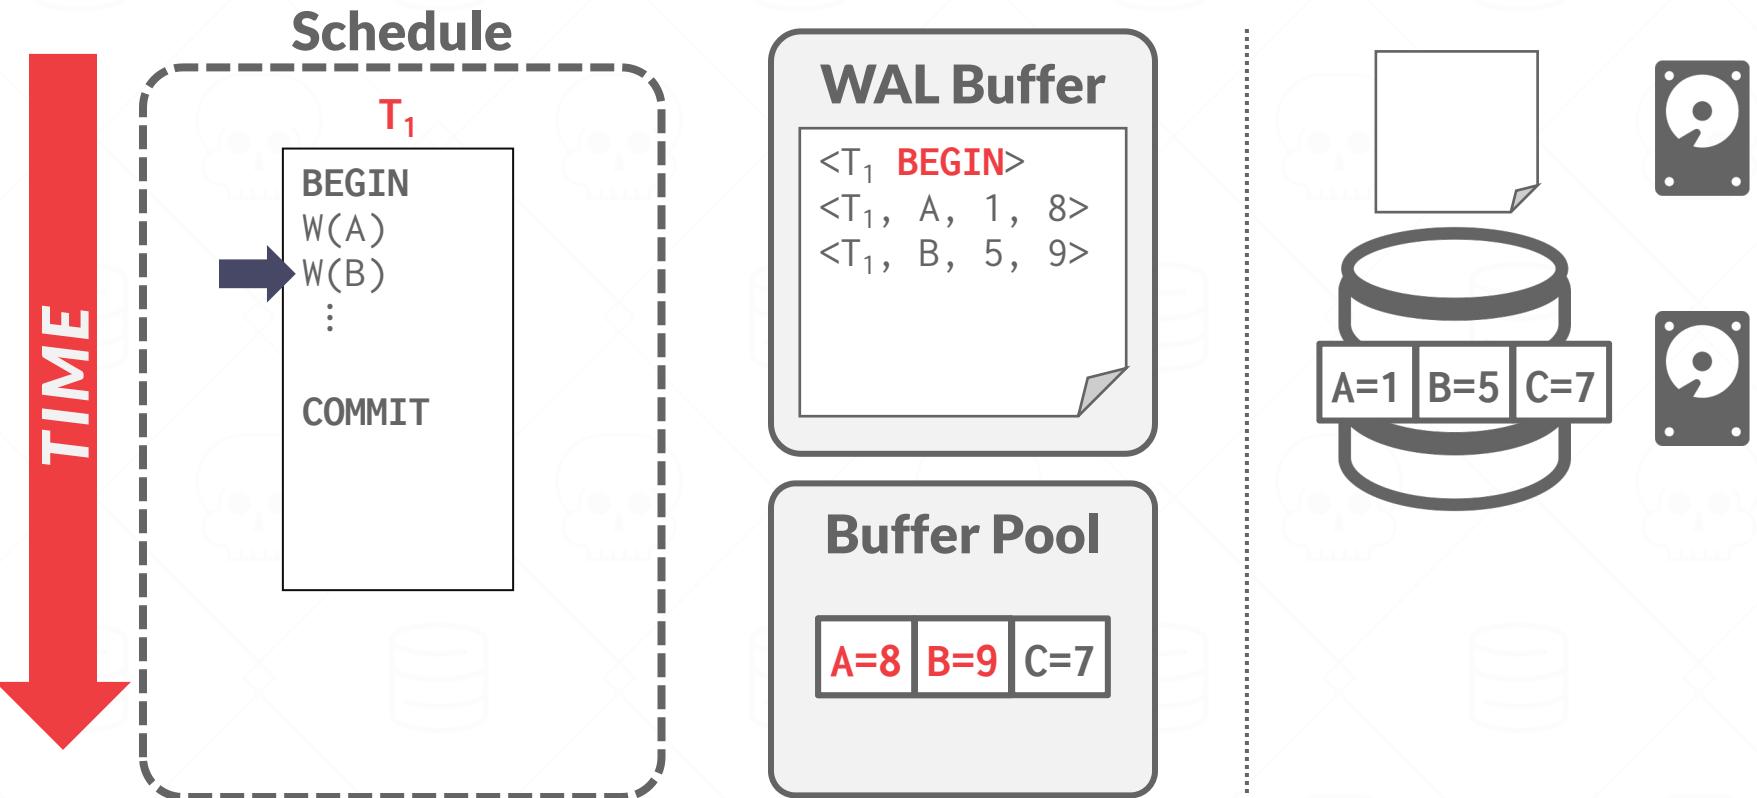

# WAL - EXAMPLE

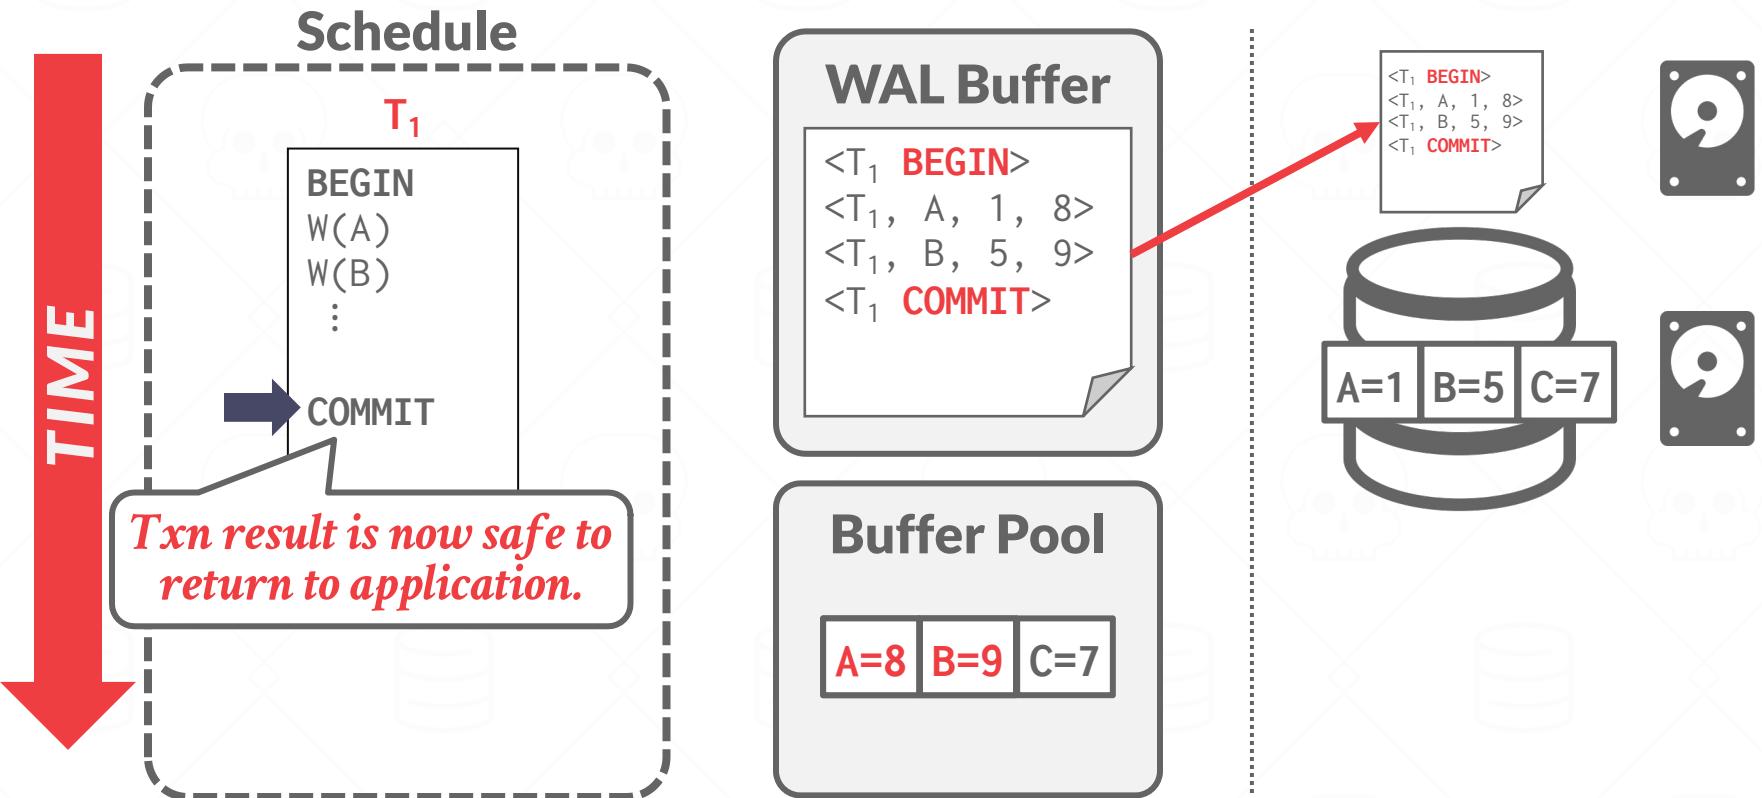


# WAL - EXAMPLE

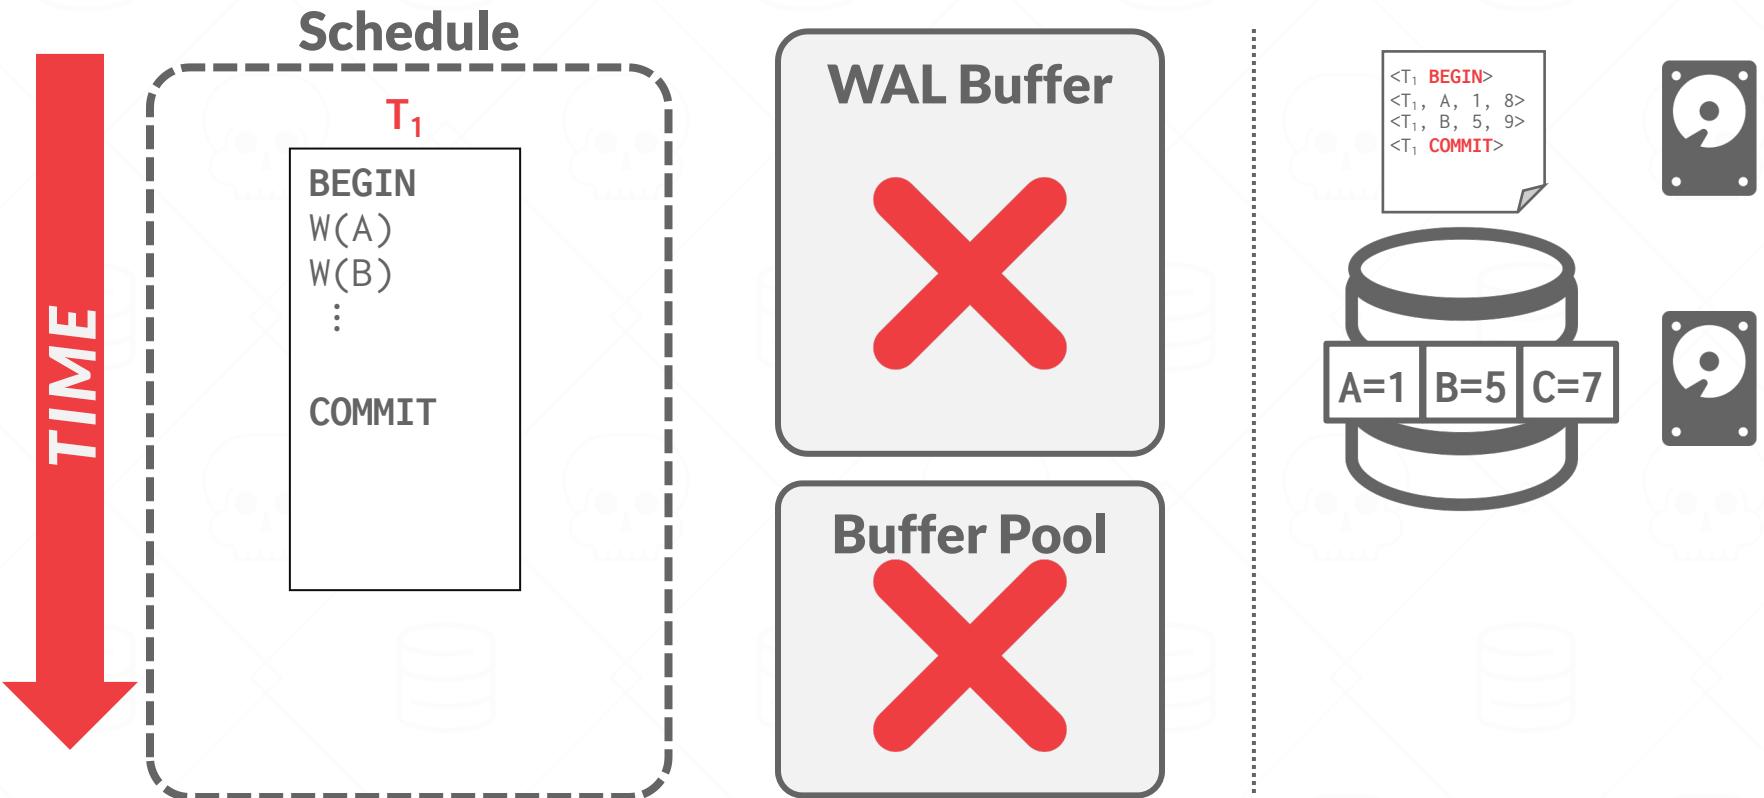

# WAL - EXAMPLE

*Everything we need to restore  $T_1$  is in the log!*

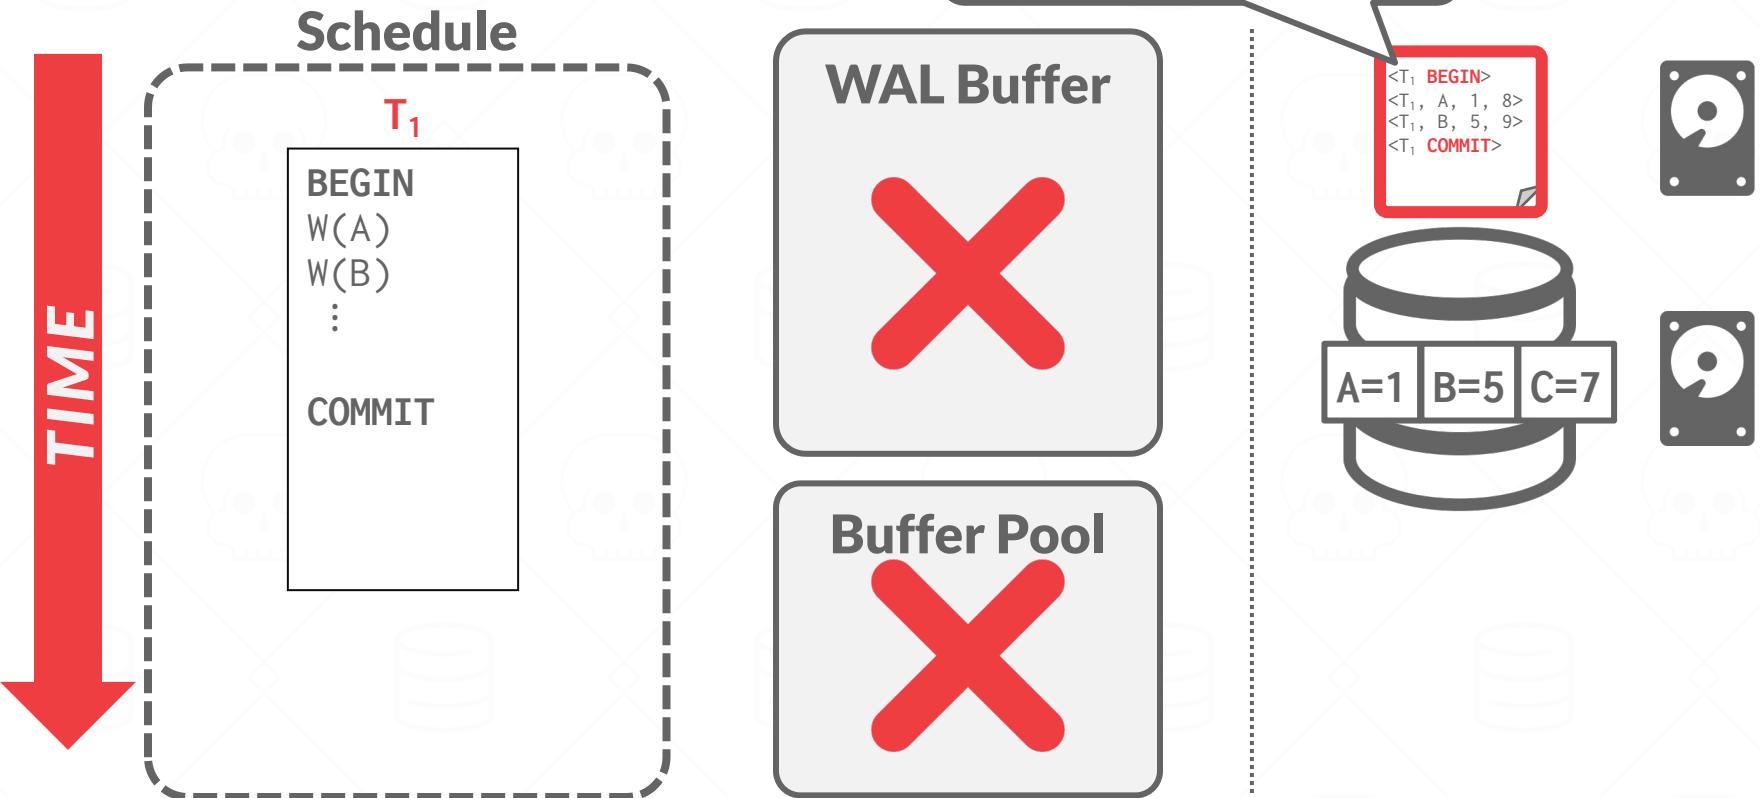

# WAL - IMPLEMENTATION


---

Flushing the log buffer to disk every time a txn commits will become a bottleneck.


The DBMS can use the group commit optimization to batch multiple log flushes together to amortize overhead.

- When the buffer is full, flush it to disk.
- Or if there is a timeout (e.g., 5 ms).


# WAL - GROUP COMMIT

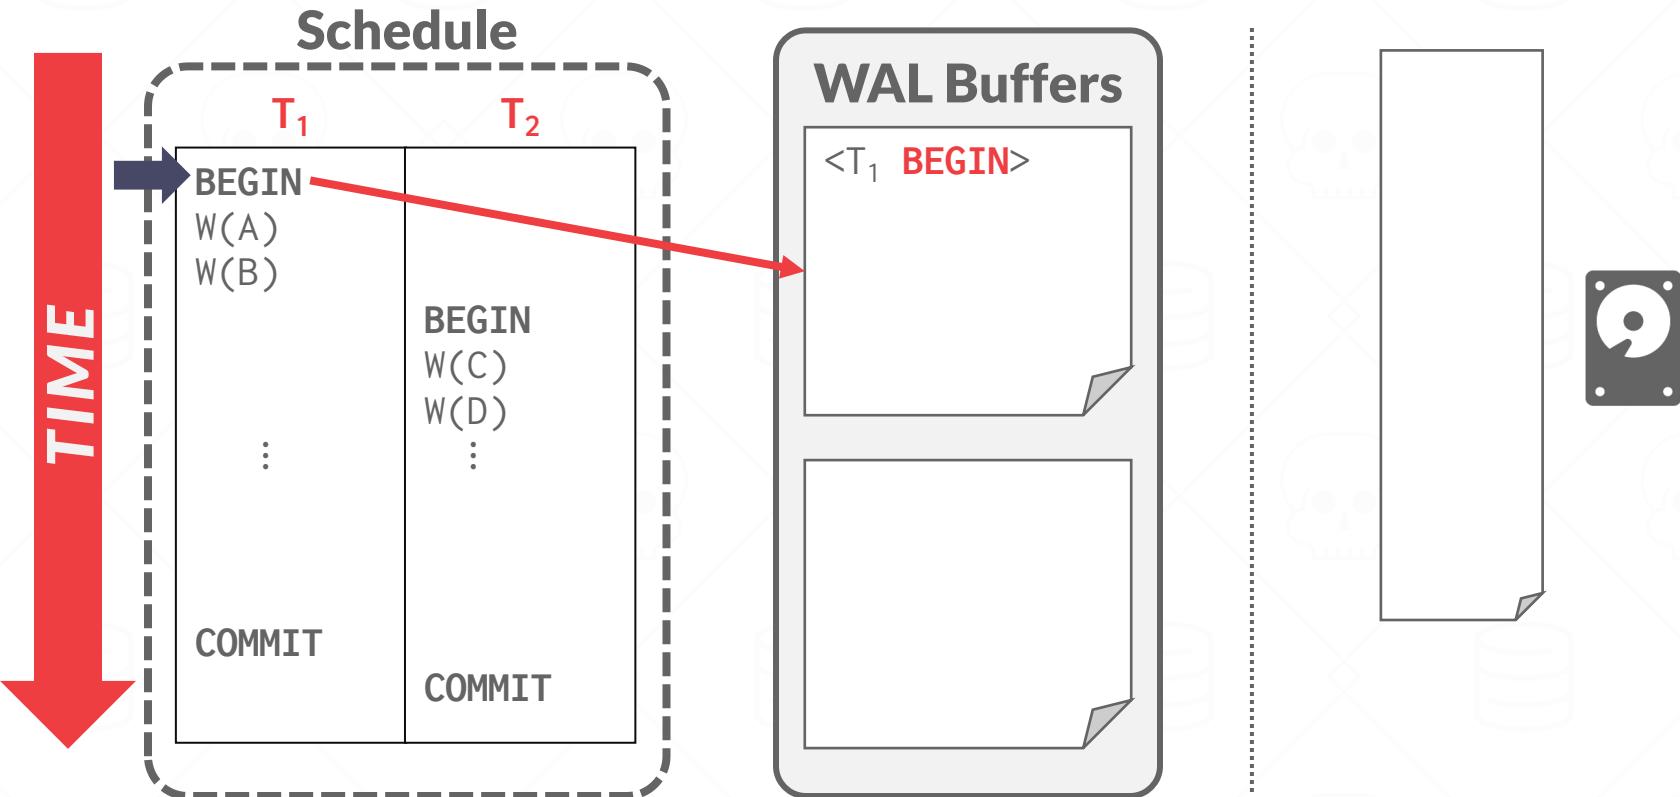


# WAL - GROUP COMMIT

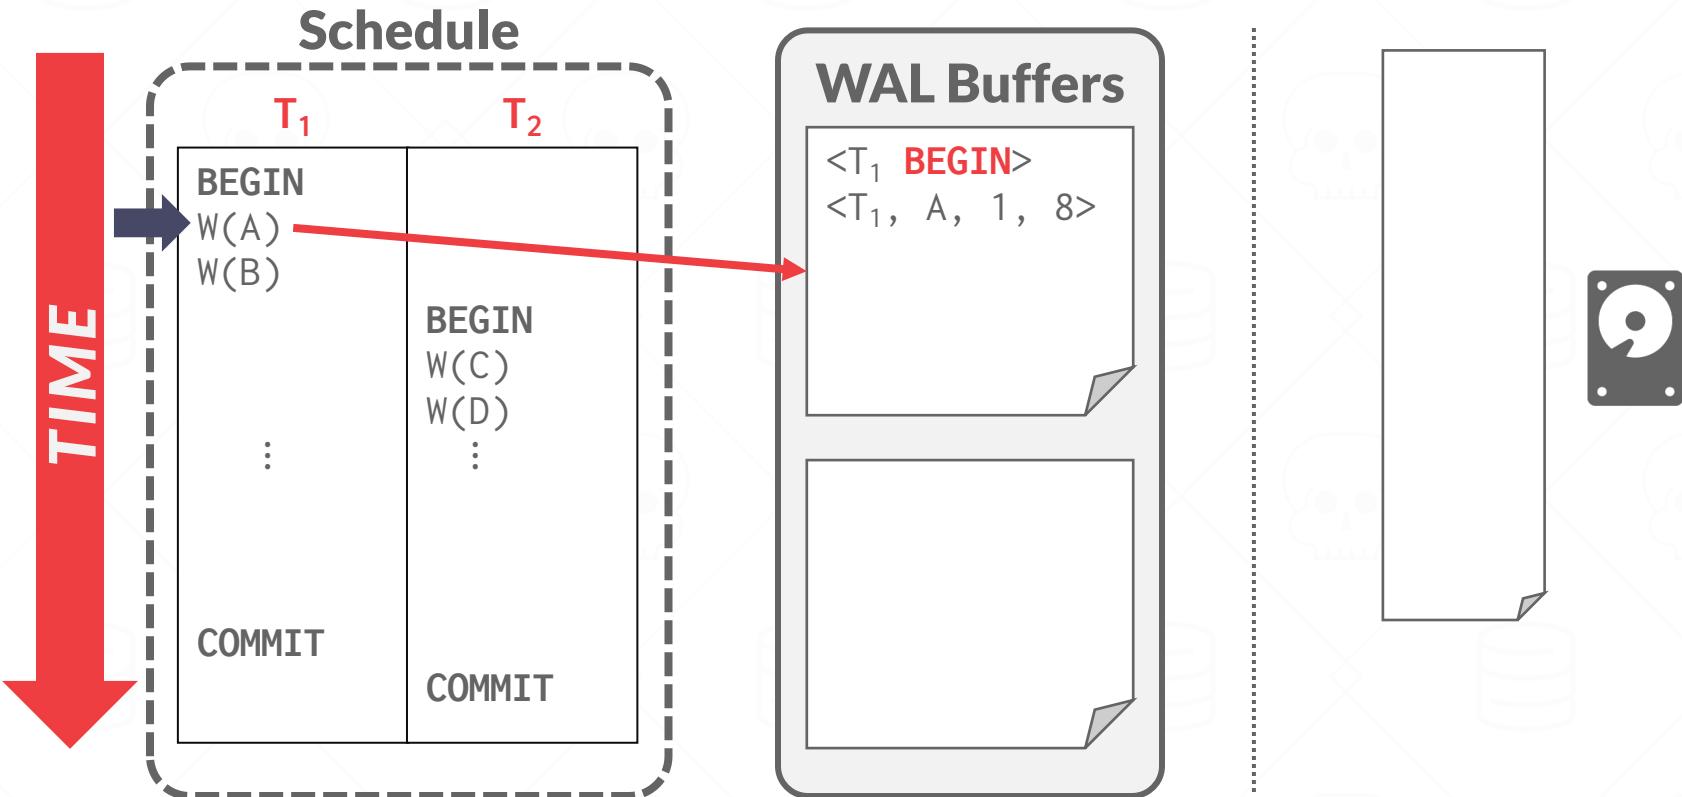


# WAL - GROUP COMMIT

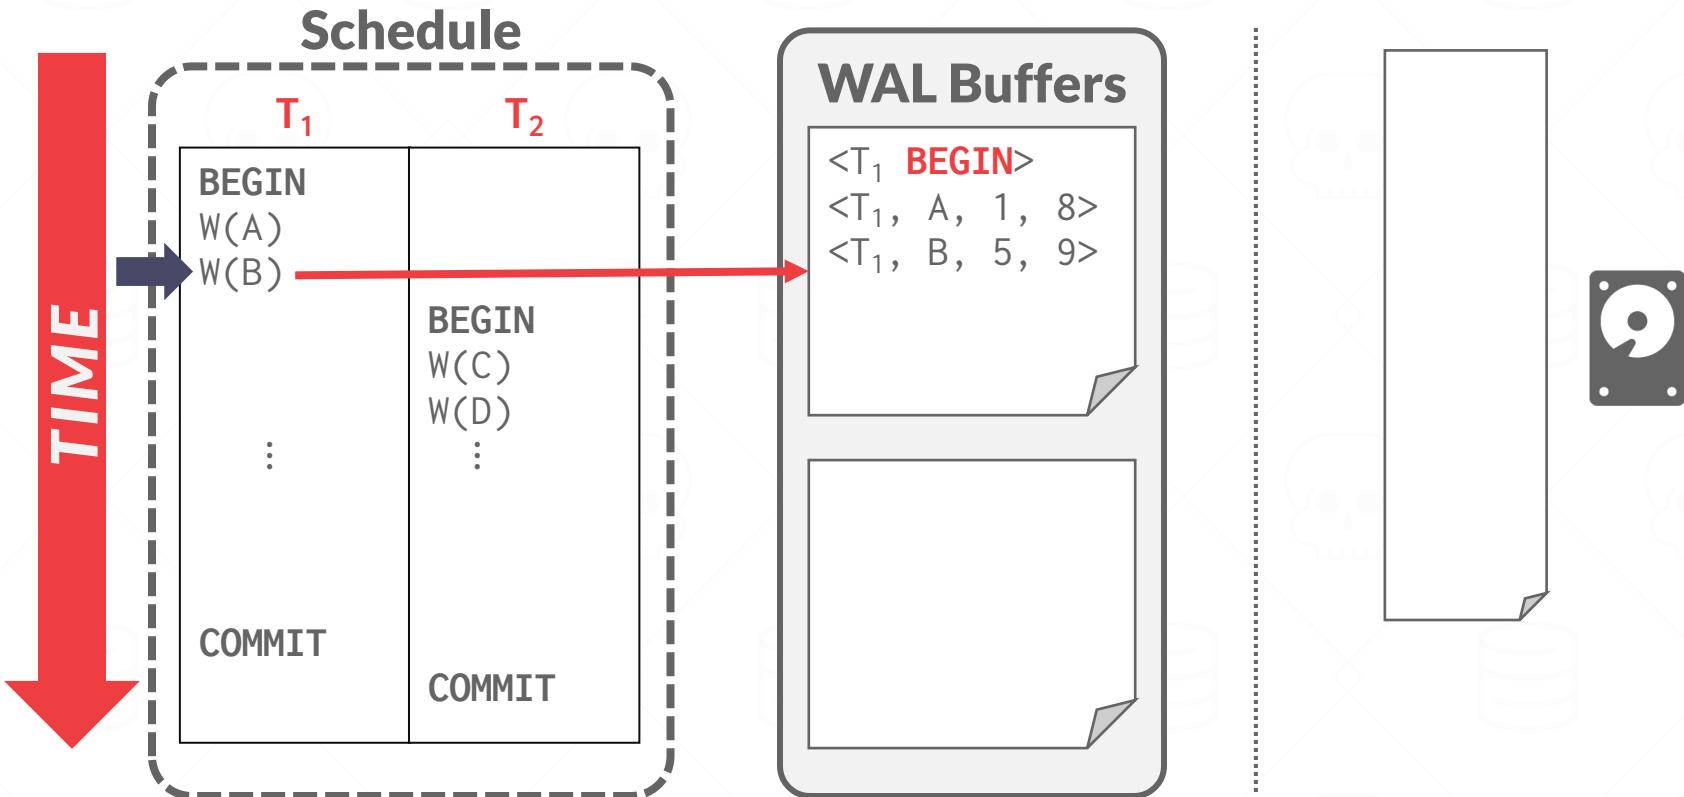


# WAL - GROUP COMMIT

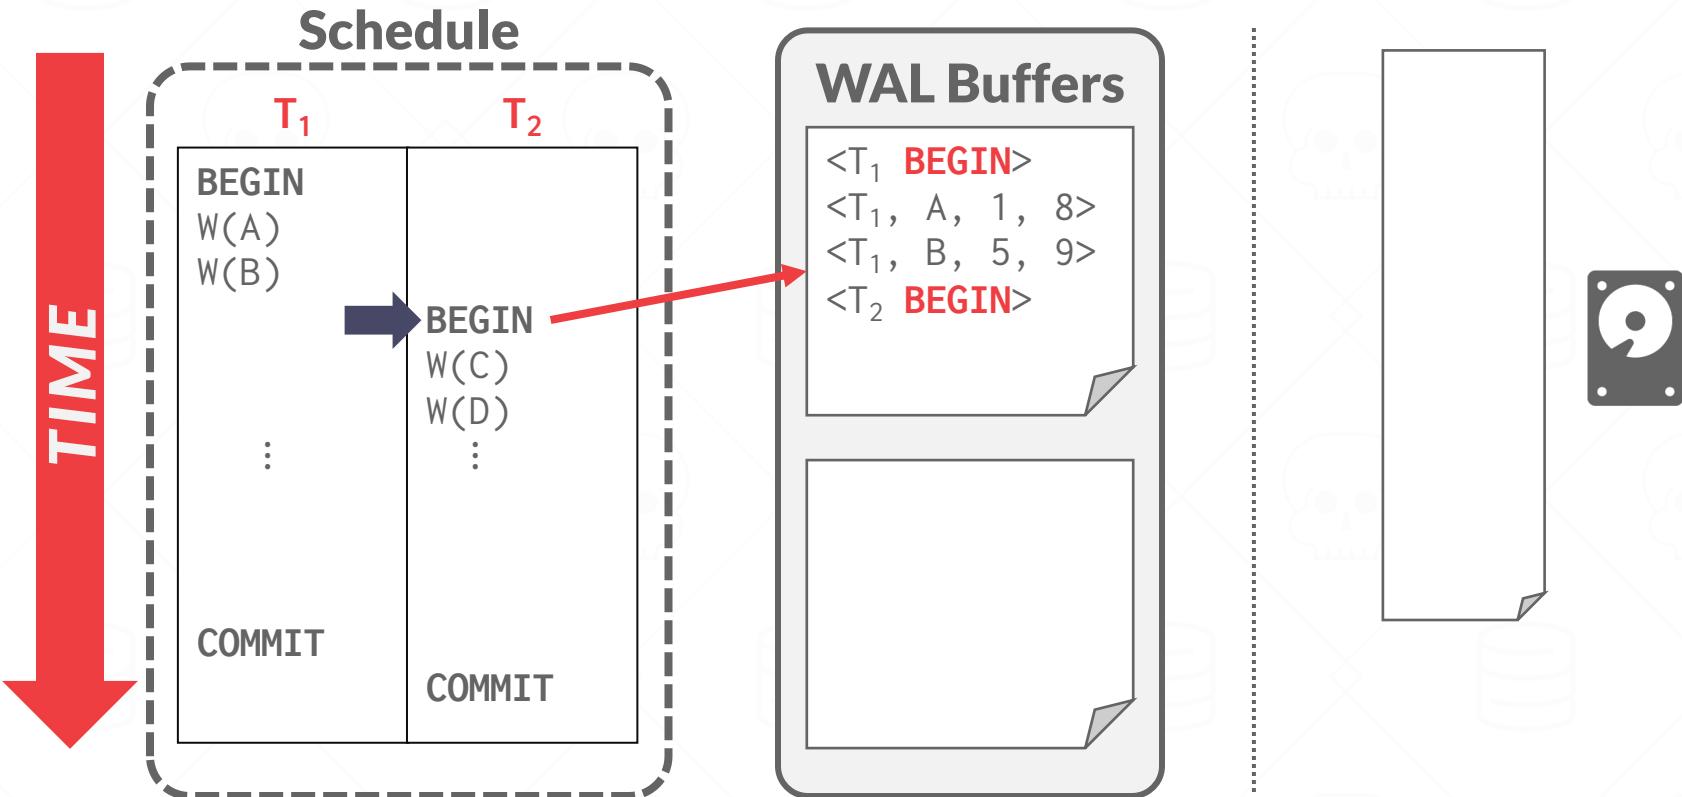


# WAL - GROUP COMMIT

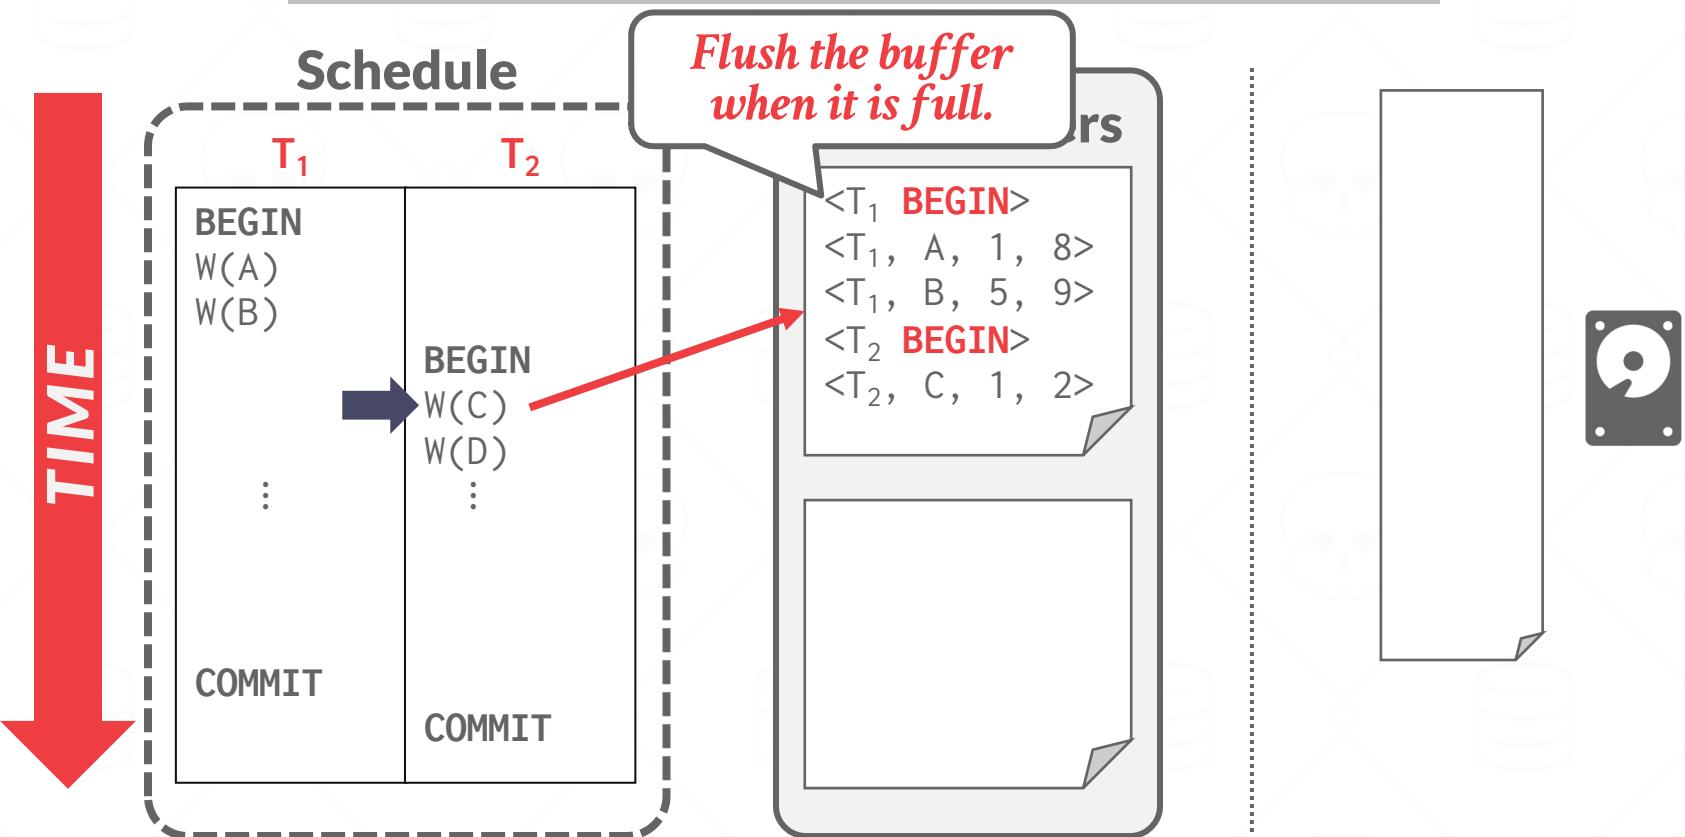


# WAL - GROUP COMMIT

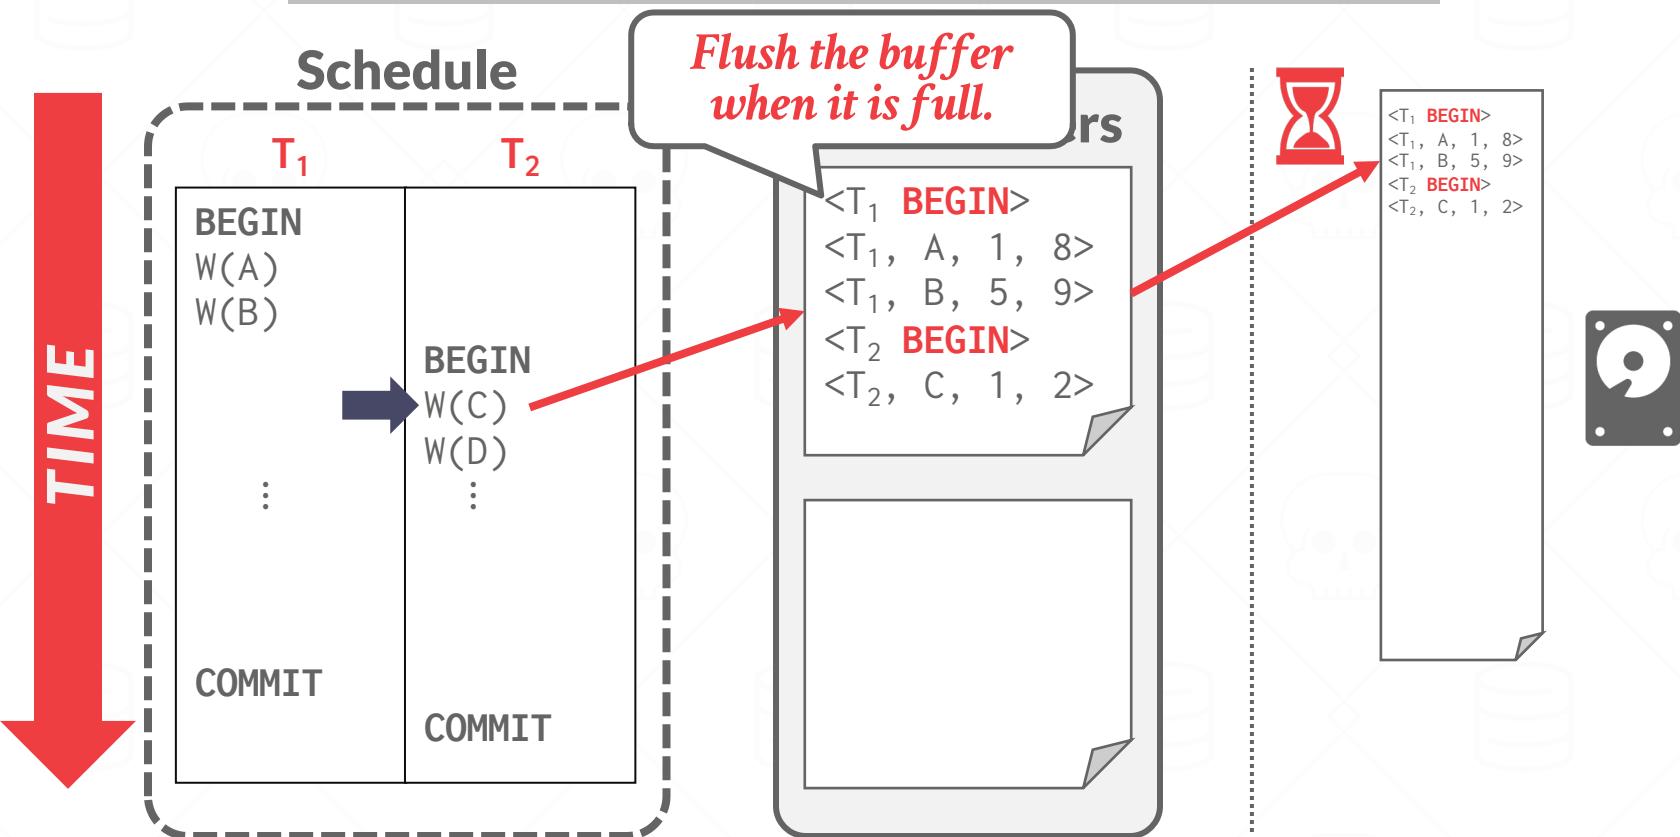


# WAL - GROUP COMMIT

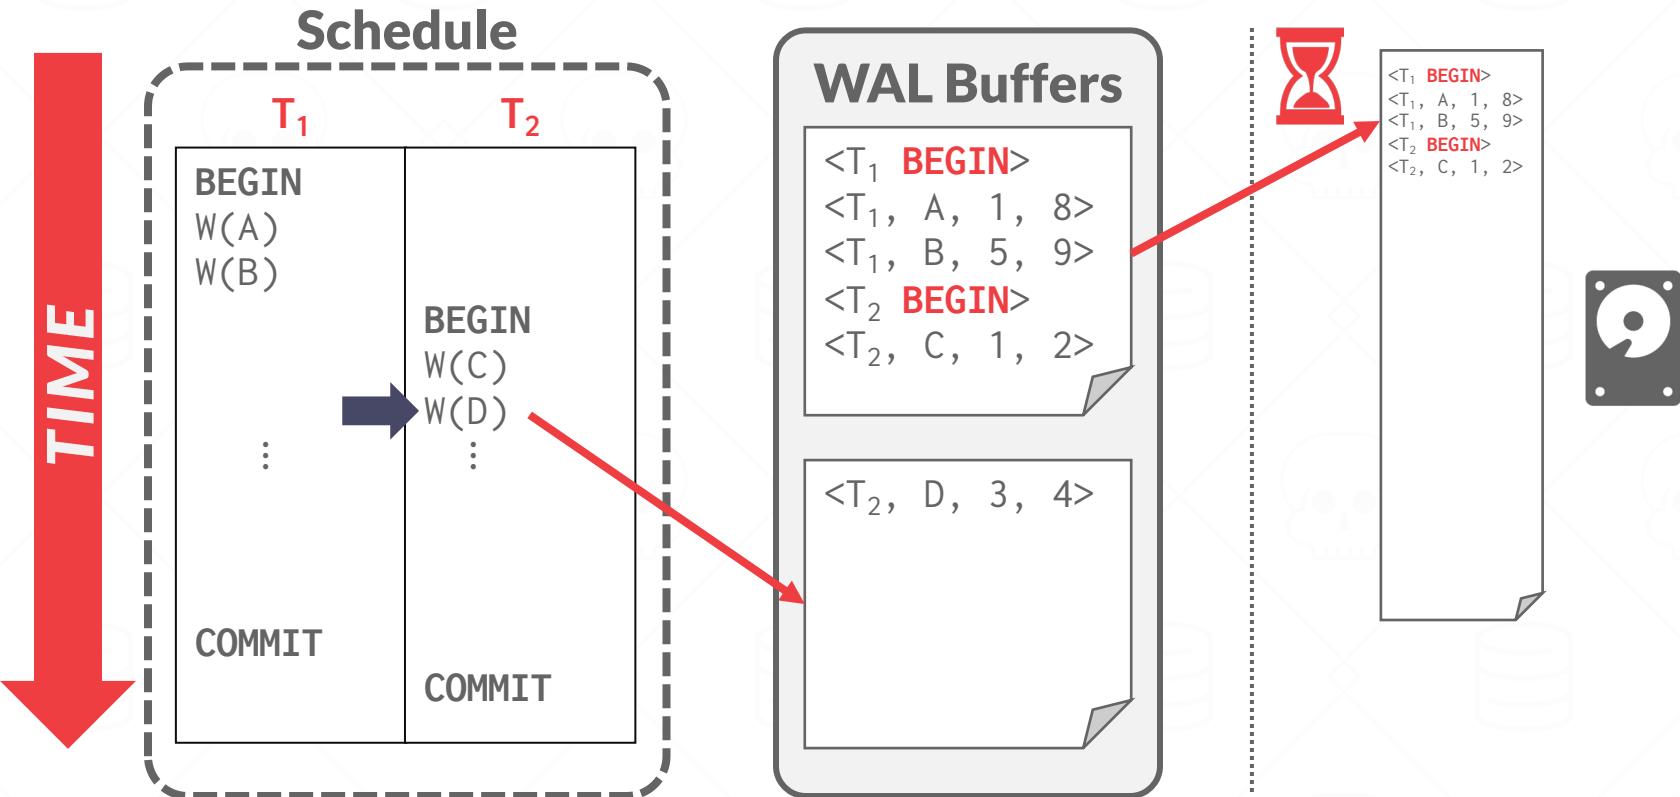


# WAL - GROUP COMMIT

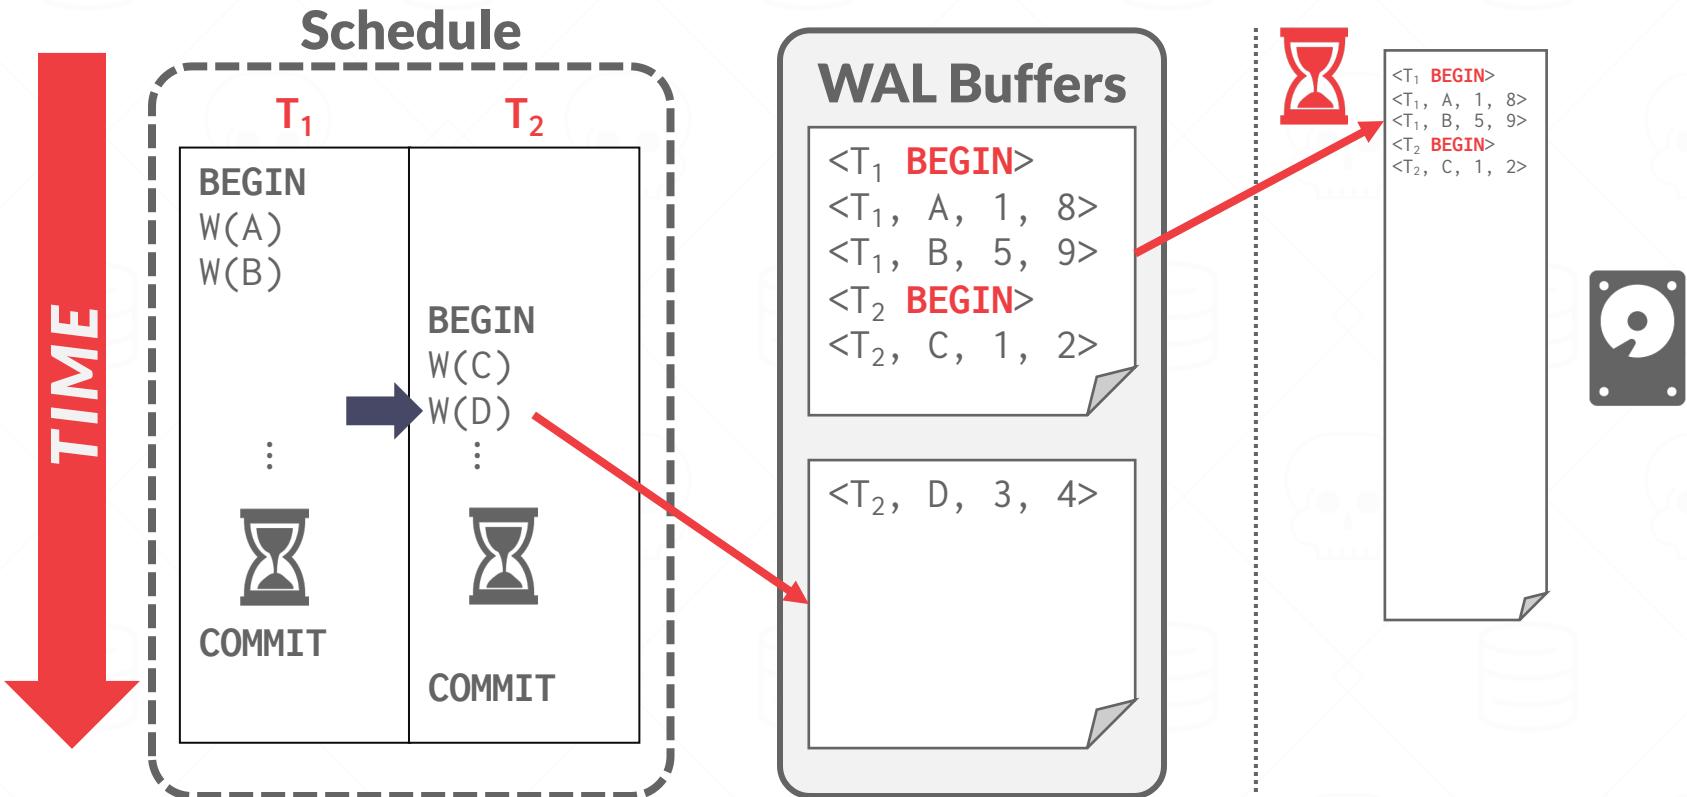


# WAL - GROUP COMMIT

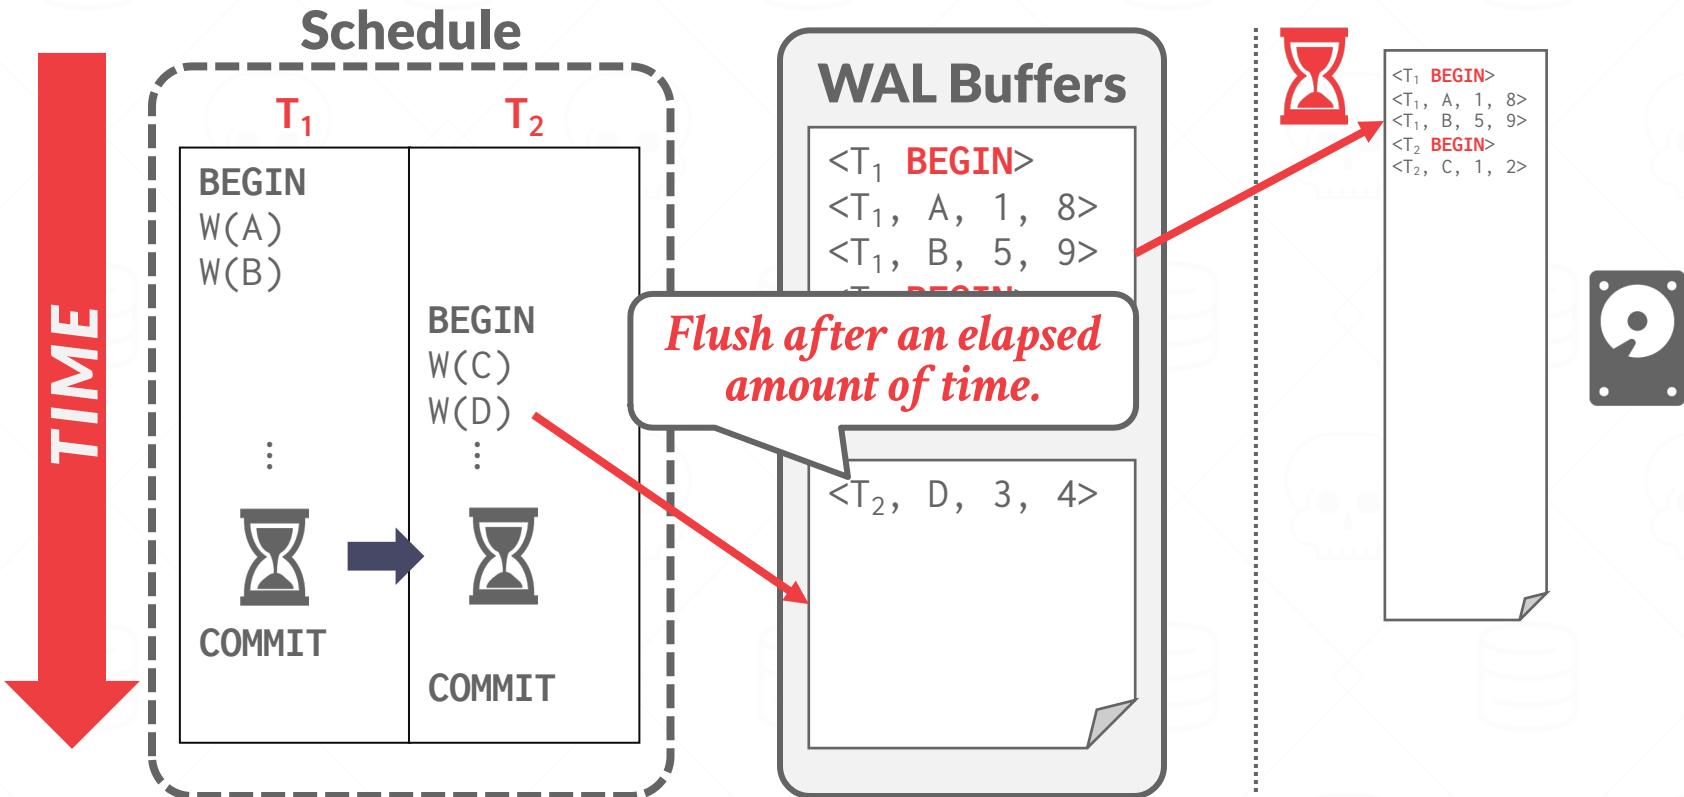

# WAL - GROUP COMMIT

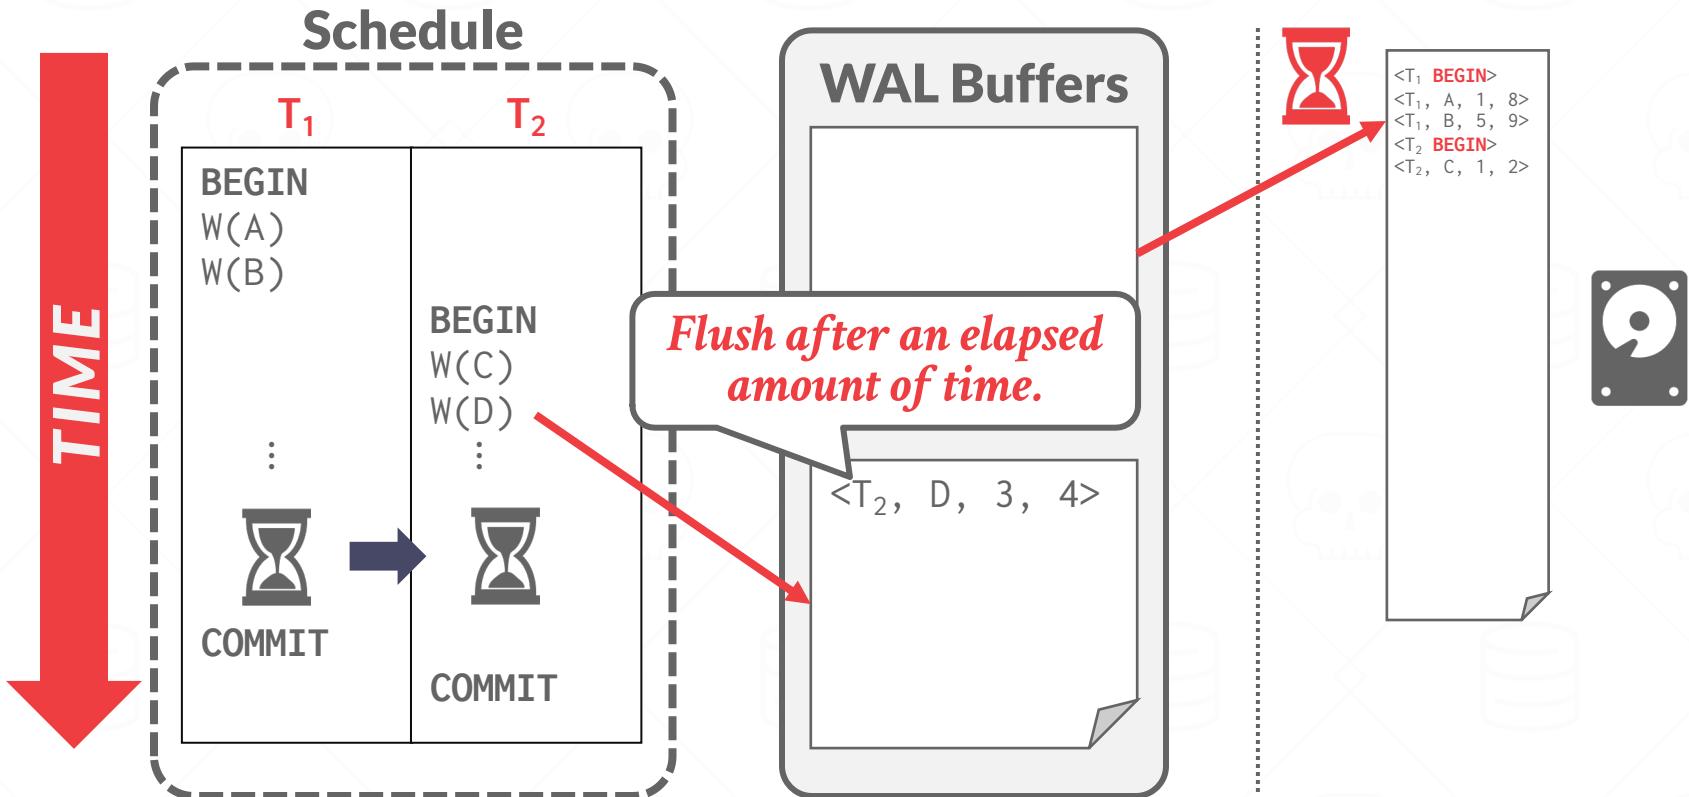

# WAL - GROUP COMMIT

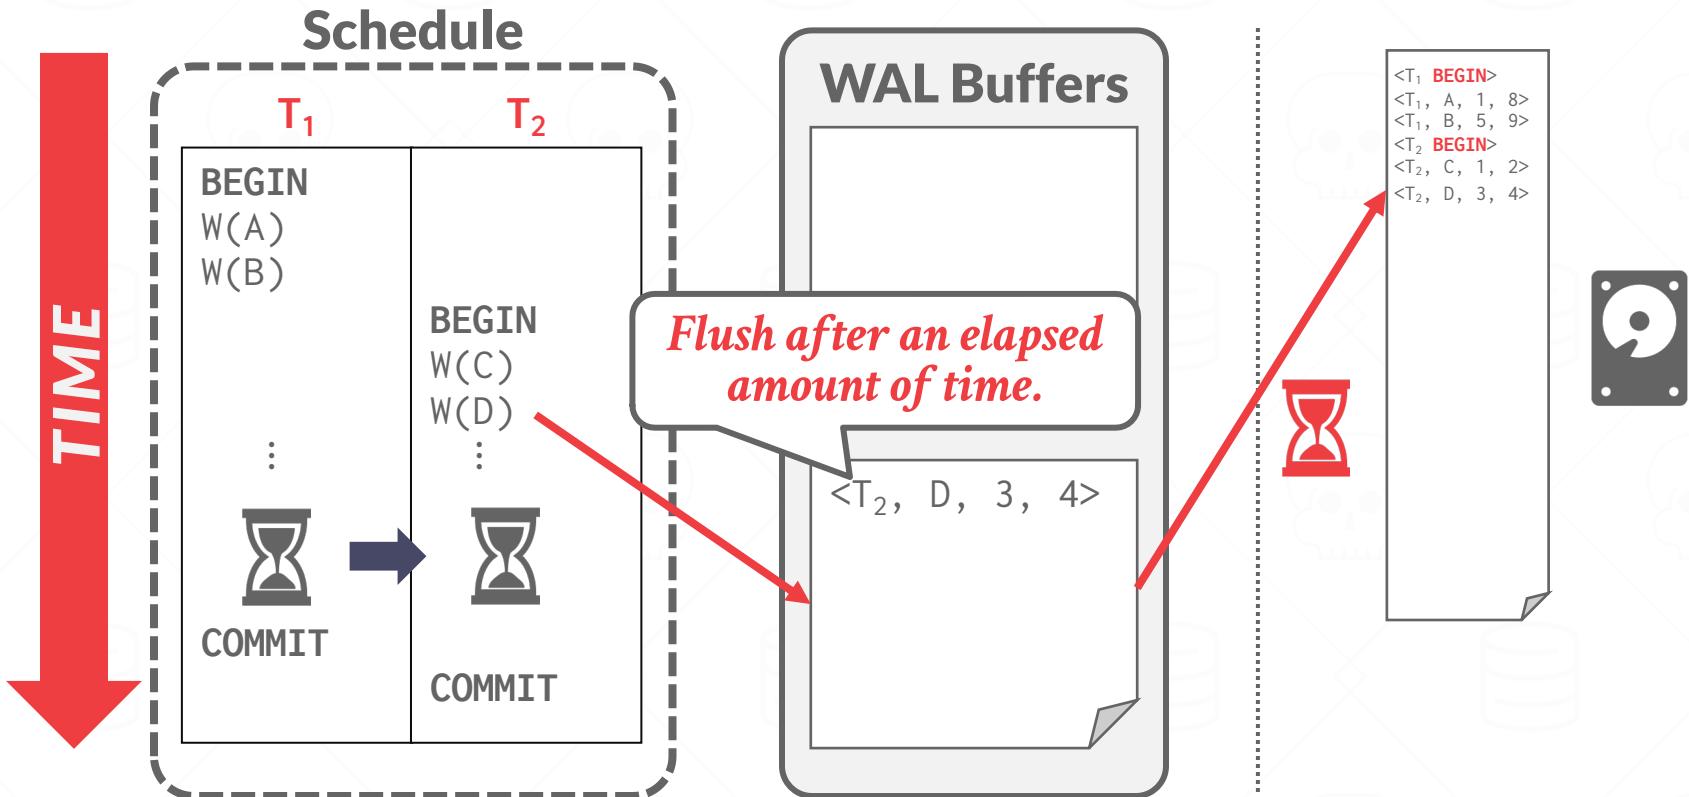

# LOGGING SCHEMES

---

## Physical Logging

- Record the byte-level changes made to a specific page.
- Example: **git diff**

## Logical Logging

- Record the high-level operations executed by txns.
- Example: **UPDATE**, **DELETE**, and **INSERT** queries.

## Physiological Logging

- Physical-to-a-page, logical-within-a-page
- Hybrid approach with byte-level changes for a single tuple identified by page id + slot number.
- Does not specify organization of the page.

# LOGGING SCHEMES

```
UPDATE foo SET val = XYZ WHERE id = 1;
```

Physical

```
<T1,  
Table=X,  
Page=99,  
Offset=1024,  
Before=ABC,  
After=XYZ>  
<T1,  
Index=X_PKEY,  
Page=45,  
Offset=9,  
Key=(1,Record1)>
```

Logical

```
<T1,  
Query="UPDATE foo  
SET val=XYZ  
WHERE id=1">
```

Physiological

```
<T1,  
Table=X,  
Page=99,  
Slot=1,  
Before=ABC,  
After=XYZ>  
<T1,  
Index=X_PKEY,  
IndexPage=45,  
Key=(1,Record1)>
```

# PHYSICAL VS. LOGICAL LOGGING

Logical logging requires less data written in each log record than physical logging.

Difficult to implement recovery with logical logging if you have concurrent txns running at lower isolation levels.

- Hard to determine which parts of the database may have been modified by a query before crash.
- Also takes longer to recover because you must re-execute every txn all over again.

# LOG-STRUCTURED SYSTEMS

Log-structured DBMSs do not have dirty pages.

→ Any page retrieved from disk is immutable.

The DBMS buffers log records in in-memory pages (MemTable). If this buffer is full, it must be flushed to disk. But it may contain changes uncommitted txns.

These DBMSs still maintain a separate WAL to recreate the MemTable on crash.

# CHECKPOINTS

---

The WAL will grow forever.

After a crash, the DBMS must replay the entire log, which will take a long time.

The DBMS periodically takes a checkpoint where it flushes all buffers out to disk.

→ This provides a hint on how far back it needs to replay the WAL after a crash.

# CHECKPOINTS


---

## Blocking / Consistent Checkpoint Protocol:

- Pause all queries.
- Flush all WAL records in memory to disk.
- Flush all modified pages in the buffer pool to disk.
- Write a <CHECKPOINT> entry to WAL and flush to disk.
- Resume queries.

# CHECKPOINTS


Use the <CHECKPOINT> record as the starting point for analyzing the WAL.

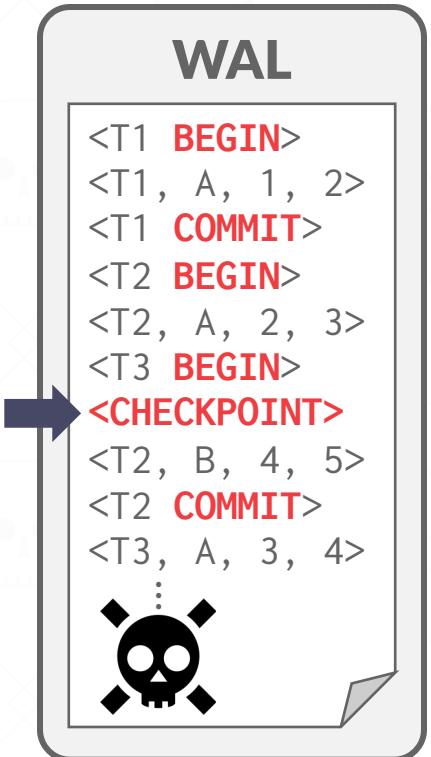

# CHECKPOINTS

Use the <CHECKPOINT> record as the starting point for analyzing the WAL.

Any txn that committed before the checkpoint is ignored ( $T_1$ ).

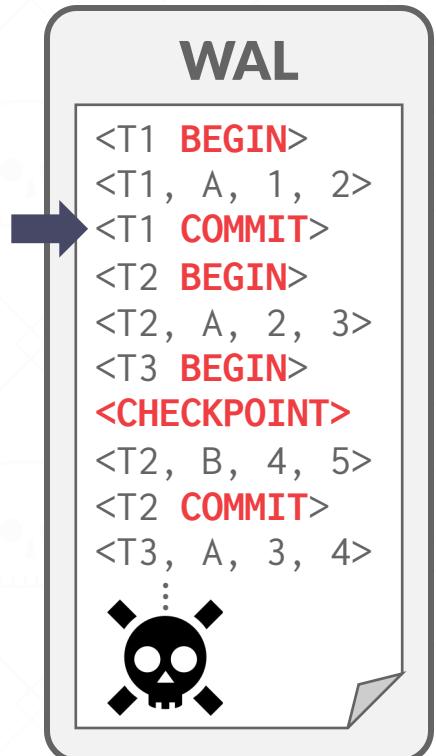


# CHECKPOINTS

Use the <CHECKPOINT> record as the starting point for analyzing the WAL.

Any txn that committed before the checkpoint is ignored ( $T_1$ ).

$T_2 + T_3$  did not commit before the last checkpoint.

- Need to redo  $T_2$  because it committed after checkpoint.
- Need to undo  $T_3$  because it did not commit before the crash.

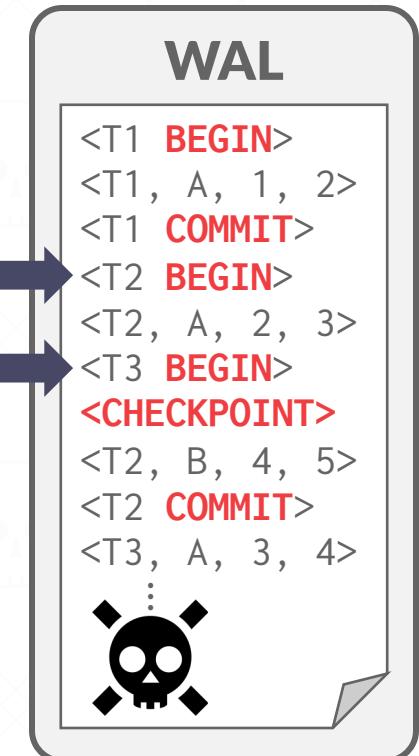

# CHECKPOINTS – CHALLENGES

In this example, the DBMS must stall txns when it takes a checkpoint to ensure a consistent snapshot.

→ We will see how to get around this problem next class.

Scanning the log to find uncommitted txns can take a long time.

→ Unavoidable but we will add hints to the <CHECKPOINT> record to speed things up next class.

How often the DBMS should take checkpoints depends on many different factors...

# CHECKPOINTS – FREQUENCY

Checkpointing too often causes the runtime performance to degrade.

→ System spends too much time flushing buffers.

But waiting a long time is just as bad:

→ The checkpoint will be large and slow.

→ Makes recovery time much longer.

Tunable option that depends on application recovery time requirements.

# CONCLUSION

---

Write-Ahead Logging is (almost) always the best approach to handle loss of volatile storage.

Use incremental updates (**STEAL + NO-FORCE**) with checkpoints.

On Recovery: undo uncommitted txns + redo committed txns.

# NEXT CLASS

---

Better Checkpoint Protocols.

Recovery with [ARIES](#).